

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .1997 .
© COPYRIGHT 1997 BY AMP INCORPORATED.ALL RIGHTS RESERVED.

LOC	DIST
J	


REVISIONS 変更

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
	A	RELEASED		28MAR2007	T.S	D.M

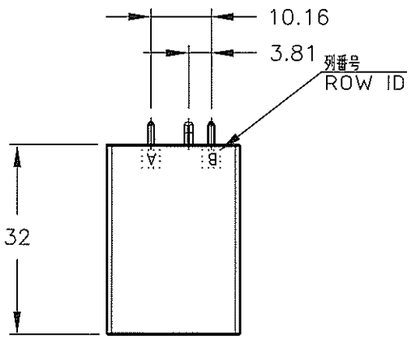





3-1981458-6
(KEYING:XY)




2-1981458-6
(KEYING:YY)

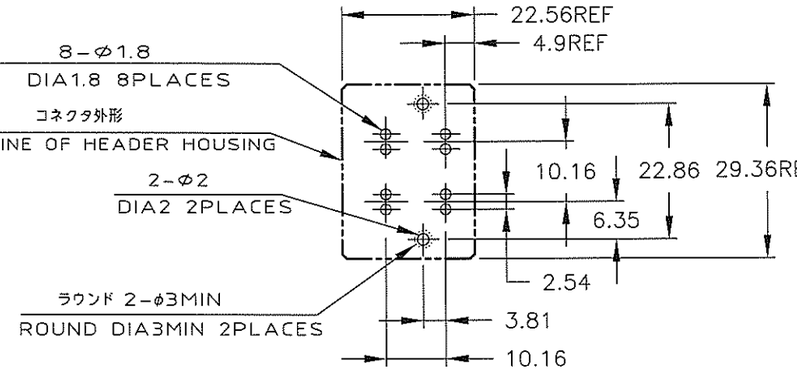


推奨基板取付け穴寸法 <公差: ±0.05>
PC 基板厚:1.6～2.4 ±0.1
(コネクタ搭載面)
RECOMENDED PC BOARD HOLE PATTERN(TOL:±0.05)
PC BOARD THICKNESS:1.6～2.4±0.1
(CONNECTOR MOUNT SIDE)

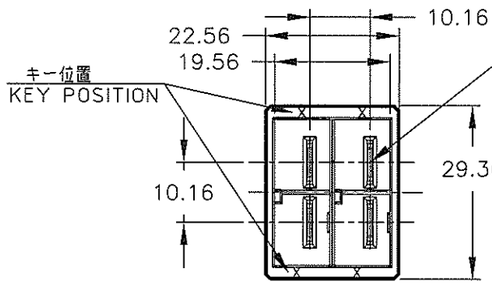

1-1981458-6
(KEYING:XX)

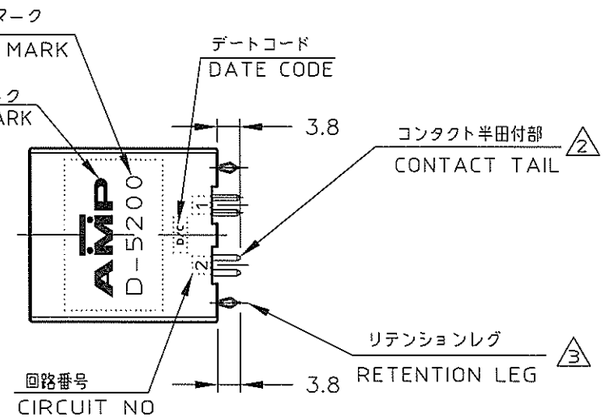



NOTES
1. MATERIAL:HOUSING:GLASS FILED THERMO PLASTIC
,POLYESTER(94V-0),COLOR:BLACK
TAB CONTACT:COPPER ALLOY
RETENTION LEG:BRASS
2. FINISH(CONTACT AREA):ALL OVER 2.54μmMIN SILVER PLATING
OVER Ni PLATING
3. FINISH(RETENTION LEG): TIN-LEAD PLATED OVER NICKEL.

注記
1. 材料:ハウジングガラス入り熱可塑性
ポリエステル樹脂(94V-0), 色:黒
タブ コンタクト:銅合金
リテンション レグ:黄銅
2. めっき:コンタクト:Ni下地の上に2.54μMIN全面銀めっき
3. めっき:リテンションレグ: ニッケル下地の上にスズめっき

XY	2	3-1981458-6
YY	2	2-1981458-6
XX	2	1-1981458-6
KEY TYPE	コンタクトのめっき (FINISH)	製品番号 (PART NO.)

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: 単位 mm
TOLERANCES UNLESS OTHERWISE SPECIFIED
一般公差
10以下 : ±0.3
30以下 >10 : ±0.35
100以下 >30 : ±0.4
ANGLE : ±3°

MATERIAL 材料: 注記参照 SEE NOTE
FINISH 仕上: 注記参照 SEE NOTE

DWN T.SAKAMOTO 27/MAR/'07
CHK D.MITSUGI 27/MAR/'07
APVD D.MITSUGI 27/MAR/'07
PRODUCT SPEC 製品規格: 108-5453
APPLICATION SPEC 取付適用規格: 114-5206
WEIGHT:
CUSTOMER DRAWING

WIRE RANGE 抱合電線断面積
INSULATION DIA 被覆外径

tyco Electronics
Tyco Electronics AMP K.K
Kawasaki,Japan

NAME 名称: 2列 ヘッダーアセンブリー 4P (垂直 タイプ)
DOUBLE ROW HEADER ASS'Y 4P("V"TYPE)
<DYNAMIC D-5200D>

SIZE A3 | CAGE CODE 00779 | DRAWING NO 番号: C-1981458
SCALE 尺度 1-1 | SHEET 1 OF 1 | REV A

顧客用図面