
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


LOC	DIST
IN	00

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A3	REVISED PER ECO-13-000026	07JAN2013	DLD	CJS
	A4	REVISED PER ECO-13-005761	05APR2013	DLD	CJS
	A5	REV PER ECN-22-163339	20JUL2022	SMR	CS
	A6	REV PER ECN-22-185005	01DEC2022	SMR	CS

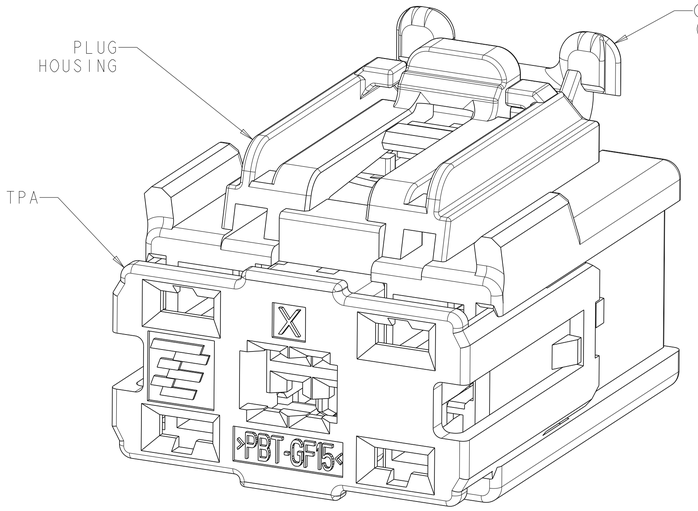



TPA SHOWN IN SHIPPING POSITION
WITH OPTIONAL CPA SHOWN

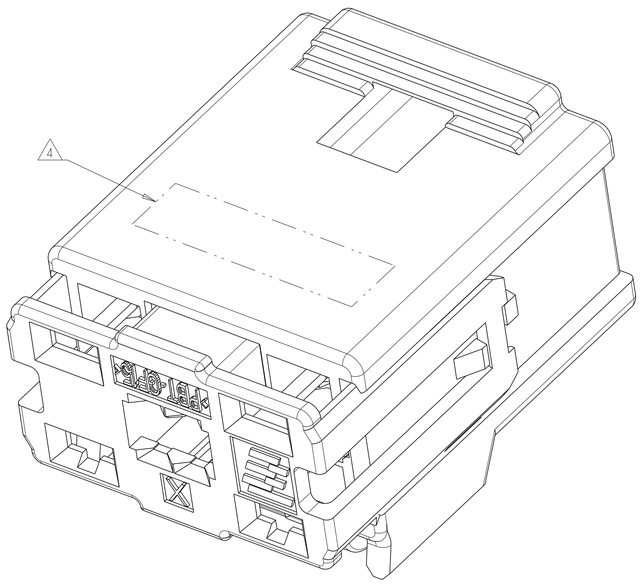


1. MATERIAL:
   PLUG HOUSING: NYLON 35% GLASS FILLED, COLOR - SEE TABLE
   TPA: PBT 15% GLASS FILLED, COLOR - NATURAL
   CPA (OPTIONAL): PBT 20% GLASS FILLED, COLOR - RED
2. TPA SHOWN IN SHIPPING POSITION.
3. OPTIONAL CPA AVAILABLE.
4. MARK DATE CODE IN APPROXIMATE LOCATION.
5. MATING RECEPTACLES:
   1326030 TIN PLATING, 2.8 CONTACT
   1924955 TIN PLATING, 0.64 CONTACT

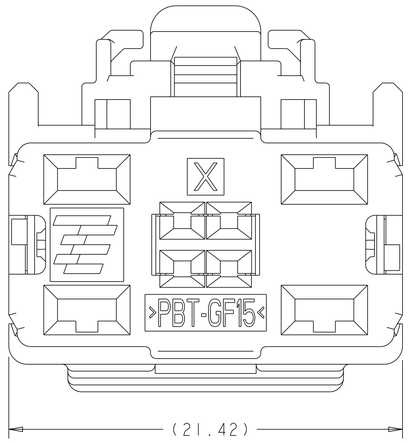

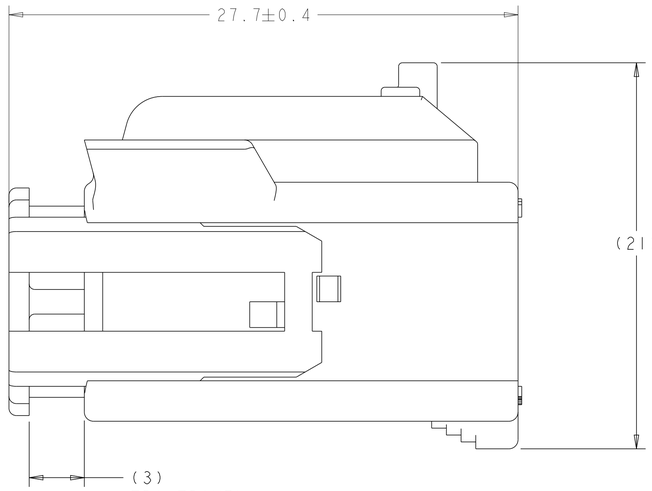


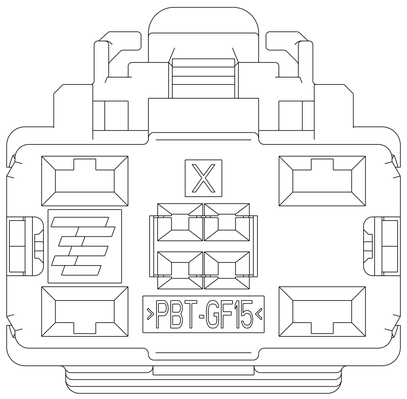

KEYING OPTION "B"
1456471-2

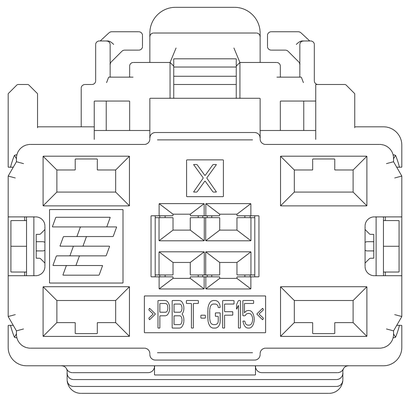

KEYING OPTION "C"
1456471-3

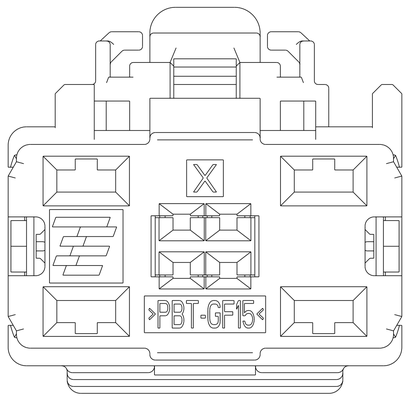

KEYING OPTION "D"
1456471-4

YES	D	GRAY	1456471-8
YES	C	BLACK	1456471-7
YES	B	GRAY	1456471-6
YES	A	BLACK	1456471-5
NO	D	GRAY	1456471-4
NO	C	BLACK	1456471-3
NO	B	GRAY	1456471-2
NO	A	BLACK	1456471-1
CPA	KEYING OPTION	KEYING OPTION	TE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±-
4 PLC ±-
ANGLES ±4°

MATERIAL -
FINISH -

DWN M. HITCHCOCK 16MAY2006
CHK A. VASBINDER 16MAY2006
APVD A. VASBINDER 16MAY2006
PRODUCT SPEC 108-2400
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME PLUG ASSEMBLY, 8-WAY UNSEALED HYBRID (4-0.64mm, 4-2.8mm)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1456471	-

Customer Drawing | SCALE 6:1 | SHEET 1 OF 1 | REV A6

4805 (3/11)