

a) Part as supplied

200W212

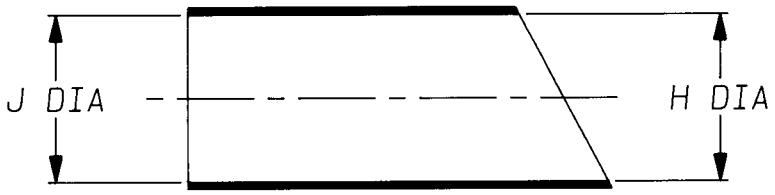

b) Part after unrestricted recovery

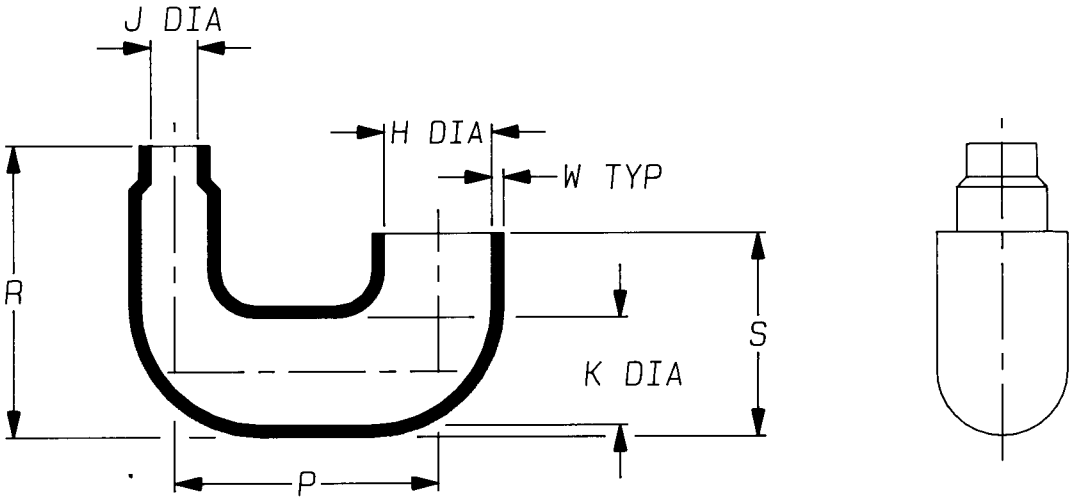

DIMENSIONS (in millimetres)

Part No.	H Min a	H Max b	J Min a	J Max b	P ±10% b	K ±10% b	R ±10% b	S ±10% b	W ±20% b
200W212	20	15	20	7.0	35	15	38	27	1.5

Copyright (!)
Urheberrechte
The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn A.LILLEY. Checked AL Issue 2 Date April 1995 Conforms to ISO Recommendations

3rd Angle Projection

Not to Scale

Approval

Design AARS. MKTG. Q.A.

Iss.	Date	E.C.R. No.	Details of Change
2	April 1995	H0206	Hb WAS 5

Ordering Information

200W212-*/**-0

- Adhesive Slash Number (if required see compatibility chart)
- Material Dash Number (see compatibility chart)
- Base Part Number

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42 , /86
-4	POLYOLEFIN, FLEXIBLE	/42 , /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
Thermofit Division Europe,
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923