

a) Part as supplied

222D9**-*-G11

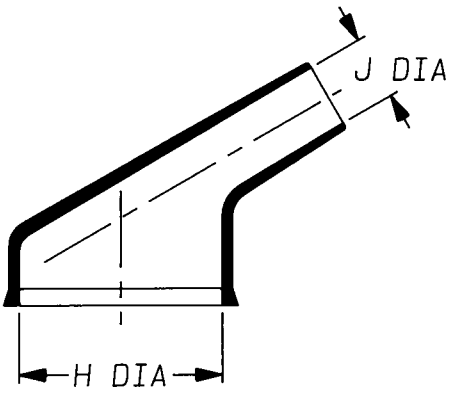

b) Part after unrestricted recovery

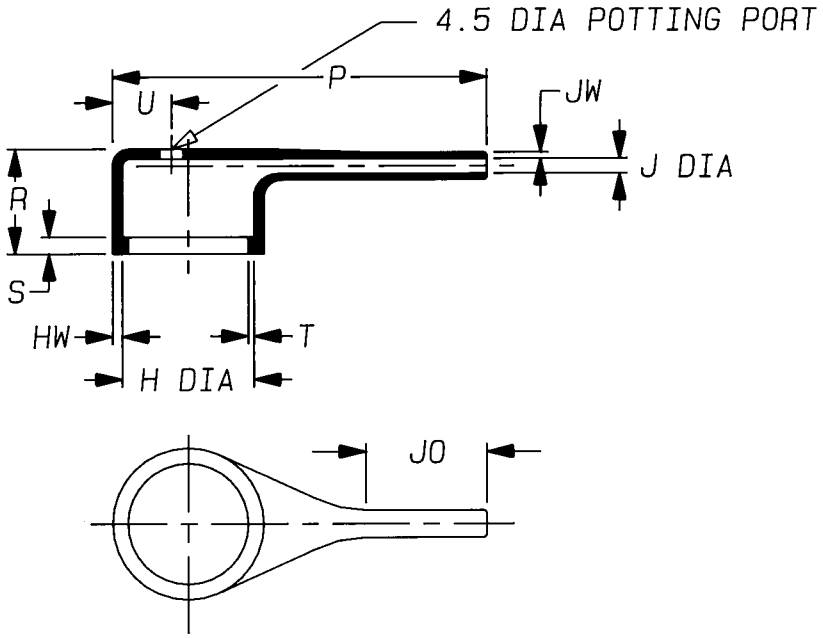

DIMENSIONS (in millimetres)

Part No	H Min a	H Max b	J Min a	J Max b	P 10% b	R Ref b	S Ref b	T Ref b	U 10% b	JO 10% b	HW ±20% b	JW ±20% b
222D921	19	13.0	6	2.1	36	16	3.0	1.0	6	13	1.5	1.1
222D932	26	19.1	8	2.6	55	18	3.0	1.0	8	17	1.8	1.1
222D953	34	26.0	10	3.1	65	19	3.0	1.0	11	20	1.8	1.1
222D963	44	34.1	11	3.6	90	21	3.0	1.7	16	21	1.8	1.1
					#					#		

THIS IS A TRIMMED VARIANT WITH POTTING PORT
MODIFIED DIMENSIONS ARE SHOWN THUS: - #

Copyright (!)
Urheberrechte
The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn A.LILLEY. Checked [illegible] Issue 1 Date May 1994

Conforms to ISO Recommendations
3rd Angle Projection
Not to Scale

Approval
Design MKTG. Q.C.

Iss.	Date	E.C.R. No.	Details of Change

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42 , /86
-4	POLYOLEFIN, FLEXIBLE	/42 , /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
Thermofit Division Europe,
Swindon, Wiltshire, England.
Telephone: (0793) 528171 Fax: 573923