382W023

a) Part as supplied.

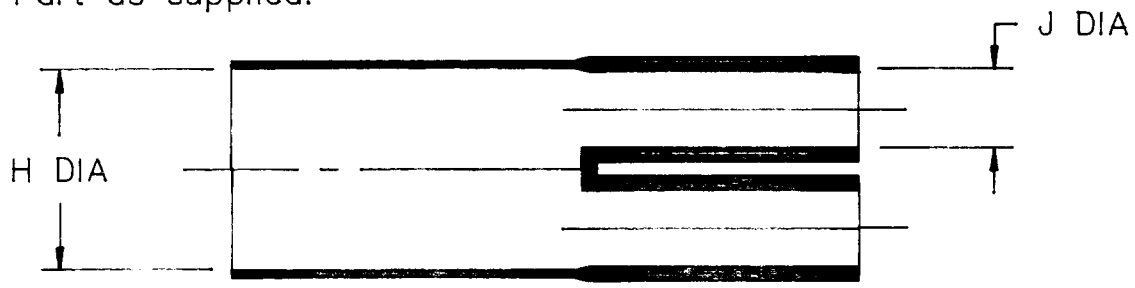

b) Part recovered.

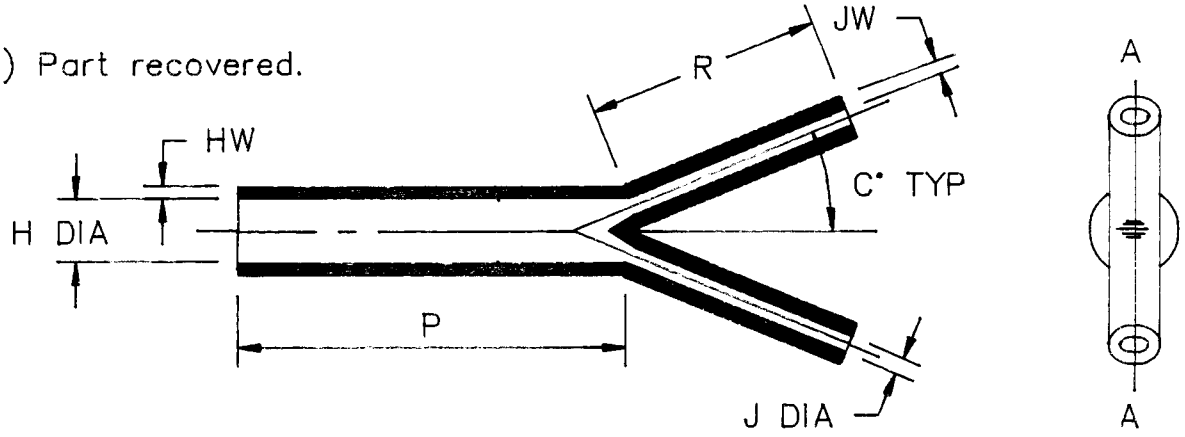

SECTION A–A

DIMENSIONS (IN MILLIMETRES)

H MIN a	H MAX b	J MIN a	J MAX b	p ±10% b	R ±10% b	HW ±20% b	JW ±20% b	C° ±5° b
17,8	10,2	10,9	4,1	51	31	1,8	2,8	22,5°

Drawn A.LILLEY Checked Issue 3 Date DEC. 1987

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale

Approval

Design MKTG Q.C.

Ordering Information

202W232-*/**-0

- Adhesive Slash Number (if required see compatibility chart)
- Material Dash Number (see compatibility chart)
- Base Part Number

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42 , /86
-4	POLYOLEFIN, FLEXIBLE	/42 , /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL
WHEN SPECIFIED BY SUFFIX "-00"
THEY WILL BE LOCATED AS SHOWN

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923