


REVISIONS			
REV	DESCRIPTION	DATE	APPV

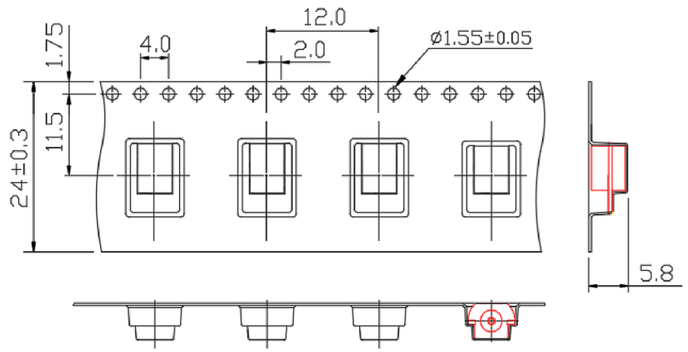


Tape and Reel Packaging

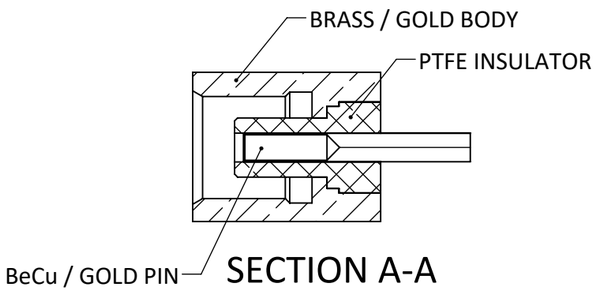



SECTION A-A

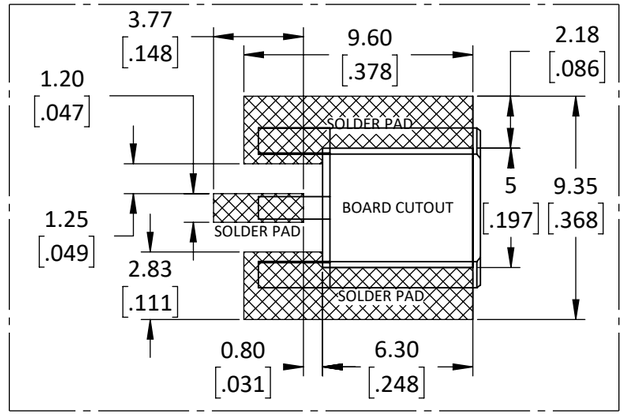



PCB LAYOUT

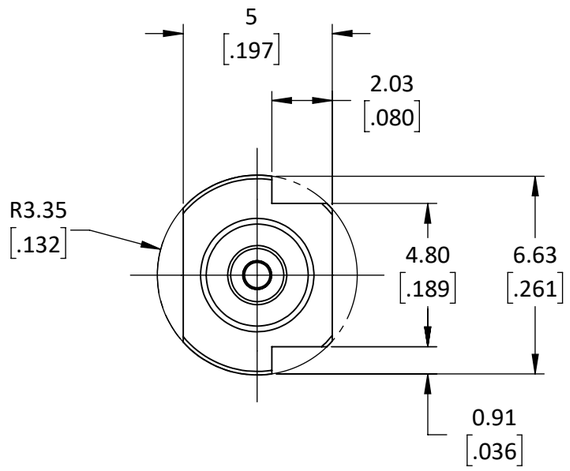

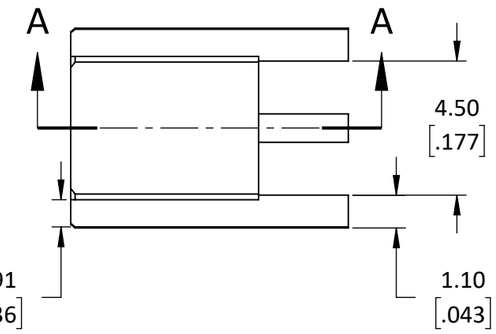

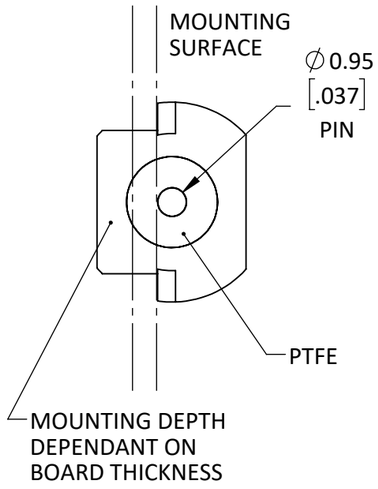

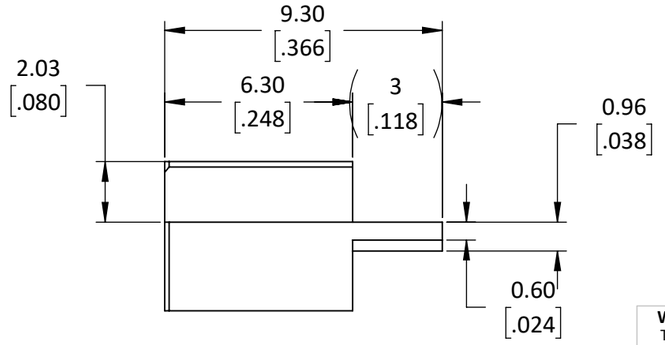



NOTES: (UNLESS OTHER WISE SPECIFIED)

1. ALL DIMENSIONS ARE IN MILIMETRES [in].
2. DIMENSIONS APPLY AFTER FINISHING. MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE,USEMATERIALS THAT DO NOT CONTAIN REACH SUBSTANCES OF VERYHIGH CONCERN >1000ppm, AND USE DRC CONFLICT-FREE SOURCED MATERIALS.
3. SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM.
4. CONNECTOR IMPEDIANCE: 50Ω
5. FREQUENCY RANGE: DC 0-6 GHz
6. VSWR:
   1. 1.22 MAX @ 2GHz
   2. 1.35 MAX @ 6GHz
7. DIELECTRIC RESISTANCE:
   1. CENTER CONTACTS: 5mΩ Max
   2. OUTER CONTACTS: 1mΩ Max
8. INTERFACE IAW CECC 22220
9. OPERATING TEMPERATURE: -65º ~ 165ºC
10. Reel Size: 13" 1000pcs/Reel
11. 500 CYCLES MINIMUM

SUPPLY TYPE	PN SUFFIX
TAPE / REEL	-T
INDIVIDUAL	NO DASH

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.

MATERIAL: Brass PTFE/BECU

FINISH: GOLD

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5.

PROJECTION:

SURFACE FINISH: ANGLES: ±1°

TOLERANCES: .X ±.1 .XX ±.01 .XXX ±.005

DRAWN: JHAGER DT: 08/18/20

ENGR: VASIKARAN DT: 08/20/20

Linx
159 ORT LANE
MERLIN, OR 97532

TITLE:
CONNECTOR MCX CUTOUT MOUNT

SIZE	DWG. NO.	REV
B	C-CONMCX013-X	A

SCALE: 5:1 DO NOT SCALE DRAWING SHEET 1 OF 1

LDCFDFB_B