
REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	"U" TOL. WAS ±10%	8-7-84	SLJ

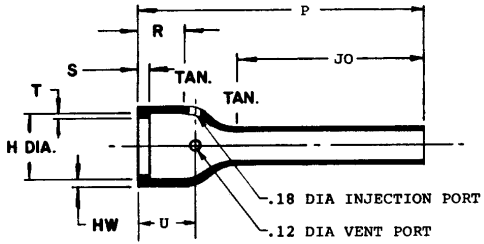

PART AFTER
UNRESTRICTED RECOVERY

TABLE OF DIMENSIONS:

PART NUMBER	H		J			P	R	S	T	JO	HW	JW	U
	Min a	Max b	POLY Min a	VITON Min a	Max b	±10% b	±15% b	±10% b	±20% b	±10% b	±20% b	±20% b	±20% b
202D211-X-32	.88 (22,3)	.45 (11,5)	.88 (22,3)	.55 (13,9)	.25 (6,4)	3.00 (76,2)	.46 (11,7)	.12 (3,05)	.040 (1,02)	2.23 (56,6)	.06 (1,52)	.045 (1,14)	.55 (14,0)
202D221-X-32	1.01 (25,6)	.59 (15,0)	1.01 (25,6)	.63 (16,0)	.29 (7,4)	3.25 (82,6)	.48 (12,2)	.12 (3,05)	.040 (1,02)	2.36 (59,9)	.06 (1,52)	.045 (1,14)	.59 (15,0)
202D232-X-32	1.16 (29,4)	.74 (18,8)	1.16 (29,4)	.72 (18,2)	.33 (8,4)	3.50 (88,9)	.48 (12,2)	.12 (3,05)	.040 (1,02)	2.48 (63,0)	.07 (1,78)	.045 (1,14)	.60 (15,2)
202D242-X-32	1.34 (34,0)	.90 (22,9)	1.34 (34,0)	.84 (21,3)	.38 (9,7)	4.00 (101,6)	.48 (12,2)	.12 (3,05)	.040 (1,02)	2.87 (72,9)	.07 (1,78)	.045 (1,14)	.62 (15,7)
202D253-X-32	1.47 (37,3)	1.16 (29,5)	1.47 (37,3)	.91 (23,1)	.41 (10,5)	4.25 (108,0)	.55 (14,0)	.12 (3,05)	.065 (1,65)	2.85 (72,4)	.08 (2,03)	.045 (1,14)	.70 (17,8)
202D263-X-32	1.72 (43,6)	1.34 (34,1)	1.72 (43,6)	1.07 (27,1)	.48 (12,2)	4.50 (114,3)	.60 (15,2)	.12 (3,05)	.065 (1,65)	2.92 (74,2)	.08 (2,03)	.045 (1,14)	.78 (19,8)
202D274-X-32	1.97 (50,0)	1.62 (41,2)	1.97 (50,0)	1.24 (31,4)	.56 (14,3)	4.65 (118,1)	.60 (15,2)	.12 (3,05)	.065 (1,65)	2.86 (72,6)	.09 (2,29)	.055 (1,40)	.78 (19,8)
202D285-X-32	2.47 (62,7)	1.85 (47,0)	2.47 (62,7)	1.54 (39,1)	.69 (17,6)	4.75 (120,7)	.63 (16,0)	.12 (3,05)	.08 (2,03)	2.78 (70,6)	.10 (2,54)	.055 (1,40)	.81 (21,0)
202D296-X-32	2.73 (69,3)	2.35 (59,7)	2.73 (69,3)	1.70 (43,1)	.77 (19,6)	5.00 (127,0)	.63 (16,0)	.12 (3,05)	.08 (2,03)	2.64 (67,1)	.10 (2,54)	.055 (1,40)	.81 (21,0)
202D299-X-32	3.22 (81,7)	2.64 (67,1)	3.22 (81,7)	2.01 (51,0)	.90 (22,9)	5.25 (133,4)	.63 (16,0)	.12 (3,05)	.08 (2,03)	2.70 (68,6)	.10 (2,54)	.055 (1,40)	.81 (1,40)

NOTES:

1. All dimensions are in inches (millimeters)
2. Dimensions appearing in Table are as follows:
   a - As supplied
   b - After unrestricted recovery
3. Part shall have injection and vent ports, located as shown.

ORDERING INFORMATION:

202D221 -4 -32

Base part number

Material dash number
- -3 Polyolefin, semi-rigid (RT-301/7)
- -4 Polyolefin, flexible (RT-1304)
- -12 Viton (RT-1312)
- -25 Elastomer, fluid-resistant (RT-1325)

Modification number

SPECIFICATION CONTROL DRAWING (LIMITED DISTRIBUTION)

THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE THE PROPERTY OF RAYCHEM CORPORATION, AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE, OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY RAYCHEM CORPORATION IS PROHIBITED.

DO NOT SCALE THIS DRAWING

DRAWN	R. Crosby	10-8-80
CHECKED	[illegible]	10/10/80
DSGN APPD	[illegible]	10/10/80
MFG APPD	[illegible]	10/14/80
QC APPD	[illegible]	10/9/80
MKTG APPD	[illegible]	10/13/80
Tech Service	R. Watson	10/10/80
PROJECT		

Raychem
RAYCHEM CORPORATION
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

TITLE: BOOT, STRAIGHT, WITH LIP

CODE IDENT. NO. 06090

DWG. NO. 202D2XX-X-32

SIZE B | SCALE ——— | SHEET 1 OF 1

If this document is printed it becomes uncontrolled.
Check for the latest revision.