
a) Part as supplied

312W021



b) Part after unrestricted recovery

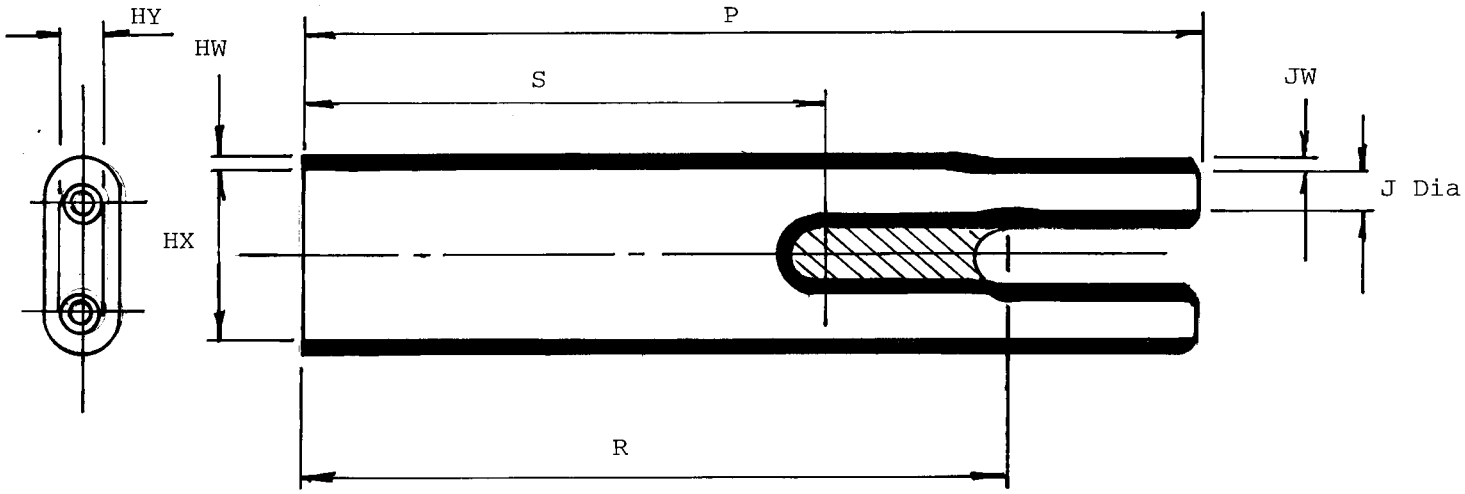

Dimensions in millimetres

Part Number	HX min a	HY min a	J min a	J max b	P ±10% b	R ±10% b	S ±10% b	HW ±20% b	JW ±20%
312W021	15	6	5	1.5	60	48.5	27	1.0	0.5

Drawn S. Dixon Checked [signature] Issue 2 Date June '85

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale

Approval

Design [signature] MKTG [signature] Q.C. [signature]

Ordering Information

202W232-*/**-0

- Adhesive Slash Number (if required see compatibility chart)
- Material Dash Number (see compatibility chart)
- Base Part Number

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42 , /86
-4	POLYOLEFIN, FLEXIBLE	/42 , /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL
WHEN SPECIFIED BY SUFFIX "-00"
THEY WILL BE LOCATED AS SHOWN

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923