SFR 1/8” and 3/16”
Silicone Rubber, Flame - Resistant,
Heat - Shrinkable Tubing

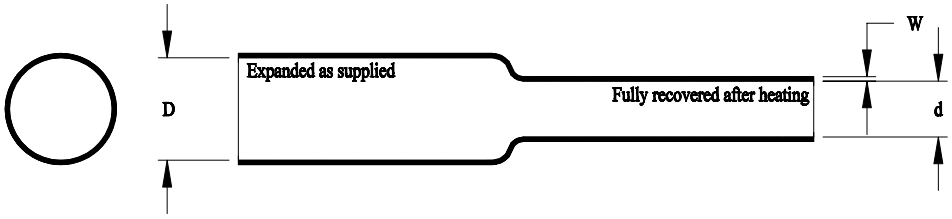


Table 1: Dimensions (in inches)

Size	As Supplied	Recovered	
	Inside Diameter Minimum (D)	Inside Diameter Maximum (d)	Wall Thickness Nominal (W)
1/8”	.125	.070	.025 ± .005
3/16”	.187	.100	.033 ± .010

Longitudinal Change: +0 to -10%

Requirements: Except as specified above, this tubing shall meet all requirements of Raychem specification RT-1140.

Specification Control Drawing

tyco Electronics	Tyco Electronics Corporation 300 Constitutional Drive Menlo Park, CA 94025 USA		Raychem	Title: SFR 1/8” and 3/16” Silicone Rubber, Flame - Resistant, Heat - Shrinkable Tubing	
Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application			Document No : SFR 1/8” and 3/16”		
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 30-Oct-96	Rev.: B	Sheet: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.