


© 2025 TE Connectivity. All Rights Reserved.


| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | NC | NEW RELEASE PER E.O. P16830 | 01SEP2000 | - | RDR |
| | B | REVISED PER PCN-24-226269 | 10JAN2025 | AJT | MB |
| | C | REVISED PER PCN-25-253066 | 25JUN2025 | UBF | CB |
| | | | | | |

## 3D VIEW

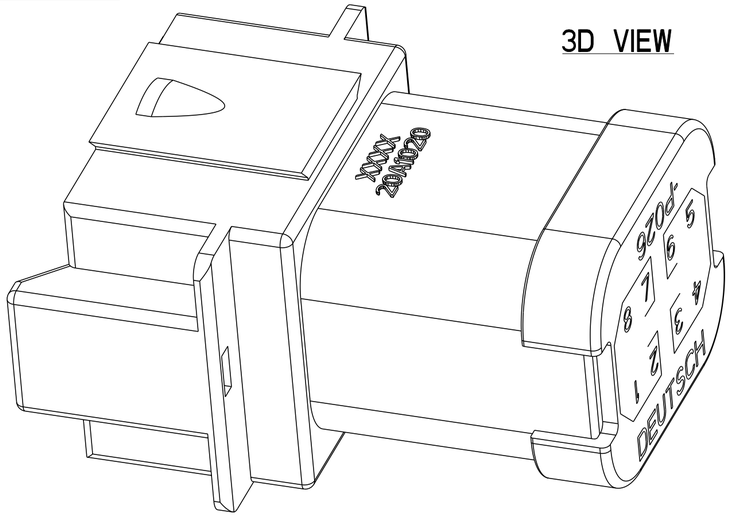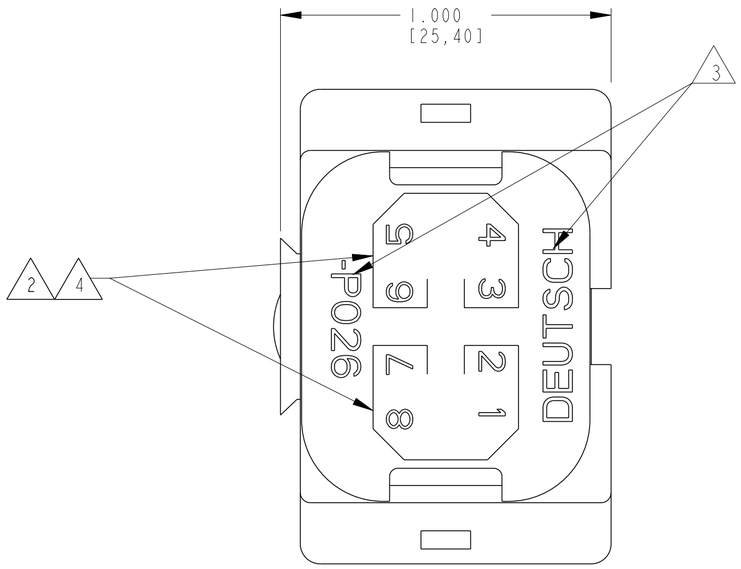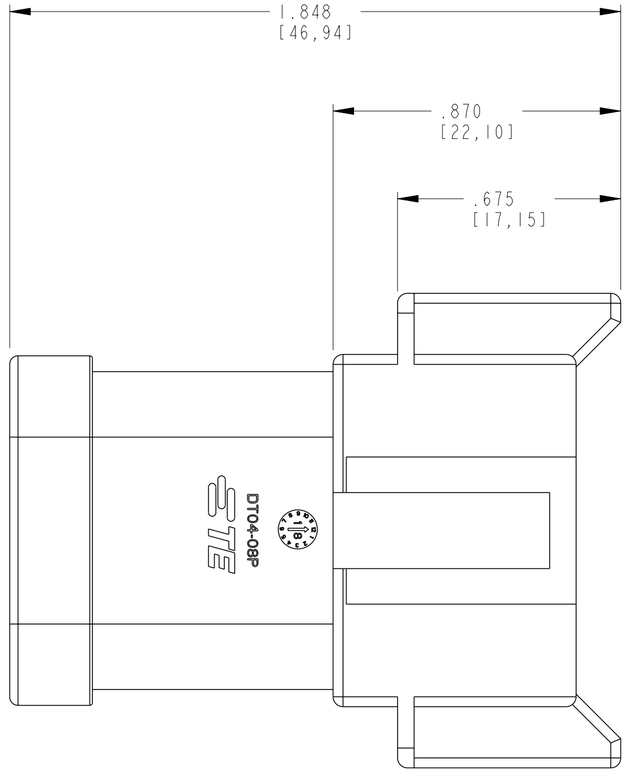


5 MATERIAL: CONNECTOR: PA66 GF15, GRAY
CAP: PA66 GF15, BLACK
WEDGELOCK (INCLUDED): PBT GF30 (GREEN)
BUSBAR: COPPER ALLOY, NICKEL PLATED.

4 THE 4 PIN BUSBAR HAS A MAXIMUM CURRENT RATING OF 26 AMPS.

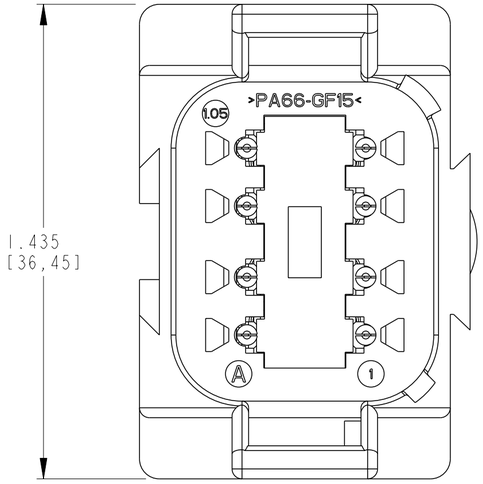3 ORIENTATION OF "DEUTSCH" AND "-P026" TO BE OPTIONAL.

2 BORDER SIGNIFIES THAT PINS 1,2,7,8 AND PINS 3,4,5,6 ARE BUSSED TOGETHER WITH 4 PIN BUSBARS.

1. MATES WITH DT06-08SA-XXXX (XXXX = ALL MODIFICATIONS).
CONSULT FACTORY FOR MODIFICATIONS.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±
2 PLC ±
3 PLC ±.025[0,63]
4 PLC ±
ANGLES ±-

MATERIAL 5

FINISH -

DWN P. BURKE 24AUG2000
CHK L. PALLUTH 01SEP2000
APVD S. BEARD 31AUG2000
PRODUCT SPEC 108-151009
APPLICATION SPEC 114-151009
WEIGHT 22 g

CUSTOMER DRAWING

TE Connectivity

NAME DT 8 WAY RECEPTACLE KEY ARRANGEMENT
A (2) 4 PIN BUSBARS - NICKEL PLATED
COLOR: GREY

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-DT04-08PA-P026 | - |

SCALE 3:1 SHEET 1 OF 1 REV C