



© 2025 TE Connectivity. All Rights Reserved.

3D VIEW

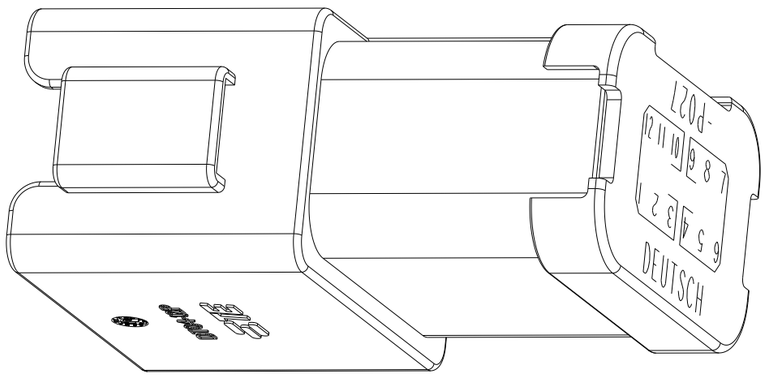

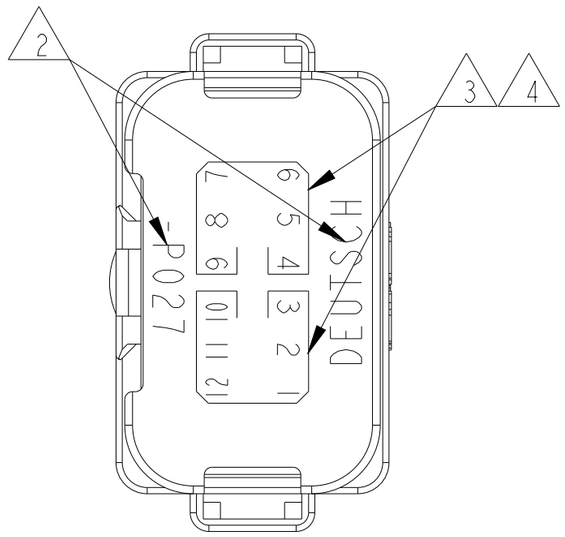

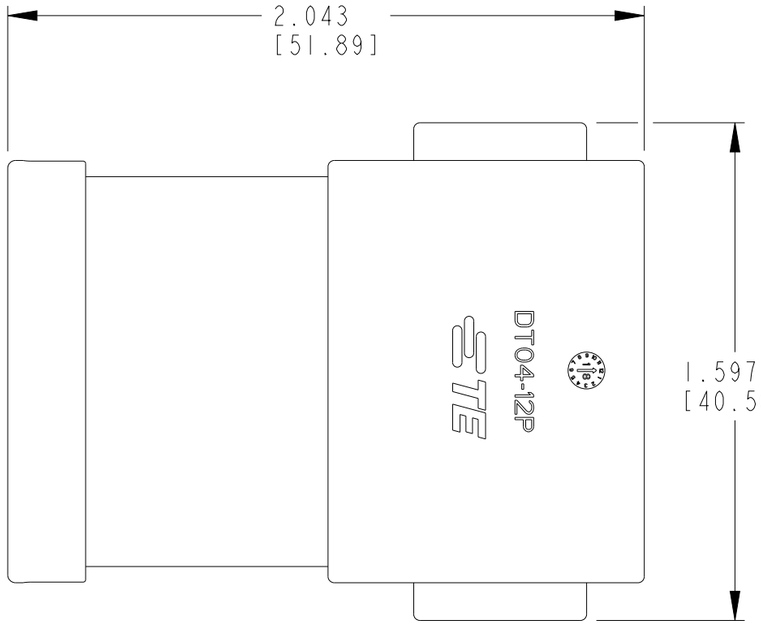

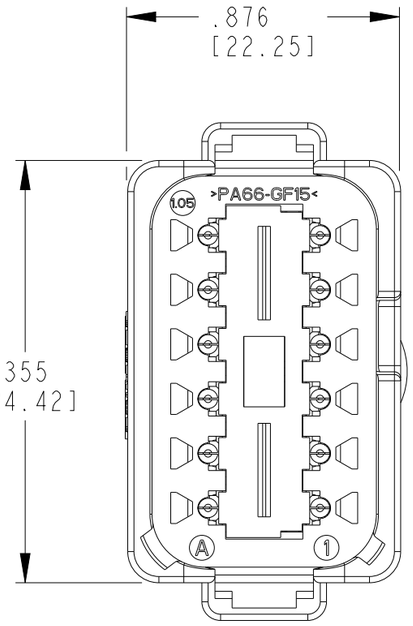

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	NC	NEW RELEASE PER E.O. P16142	17AUG1999	-	RDR
	A	REVISION PER E.O. P16286	07SEP1999	-	-
	A1	REVISED PER PCN-25-253066	12JUN2025	UBF	CB

5. MATERIAL: RECEPTACLE & CAP: PA66 GF15, BLACK.
WEDGELOCK (INCLUDED): PBT GF30, GREEN.
BUSBAR: COPPER ALLOY, GOLD PLATED.

4. THE 6 PIN BUSBAR HAS A MAXIMUM CURRENT RATING OF 39 AMPS.

3. BORDER SIGNIFIES THAT PINS 1,2,3,10,11,12 AND PINS 4,5,6,7,8,9 ARE BUSSED TOGETHER WITH 6 PIN BUSBARS.

2. ORIENTATION OF "DEUTSCH" AND "-P027" TO BE OPTIONAL.

1. THIS DT04-12PB-P027 MATES WITH DT06-12SB-XXXX (XXXX = ALL MODIFICATIONS) CONSULT FACTORY FOR MODIFICATIONS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[MM]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±0.025[0.63]
4 PLC ±
ANGLES ±-

MATERIAL 5

FINISH -

DWN M.GONZALEZ 05AUG1999
CHK - -
APVD - 07SEP1999
PRODUCT SPEC 108-151009
APPLICATION SPEC 114-151009
WEIGHT 26g

TE Connectivity

NAME DT 12 WAY RECEPTACLE KEY ARRANGEMENT -B- (2) 6 PIN BUSBARS-GOLD PLATED COLOR: BLACK

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-DT04-12PB-P027	-

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV A1