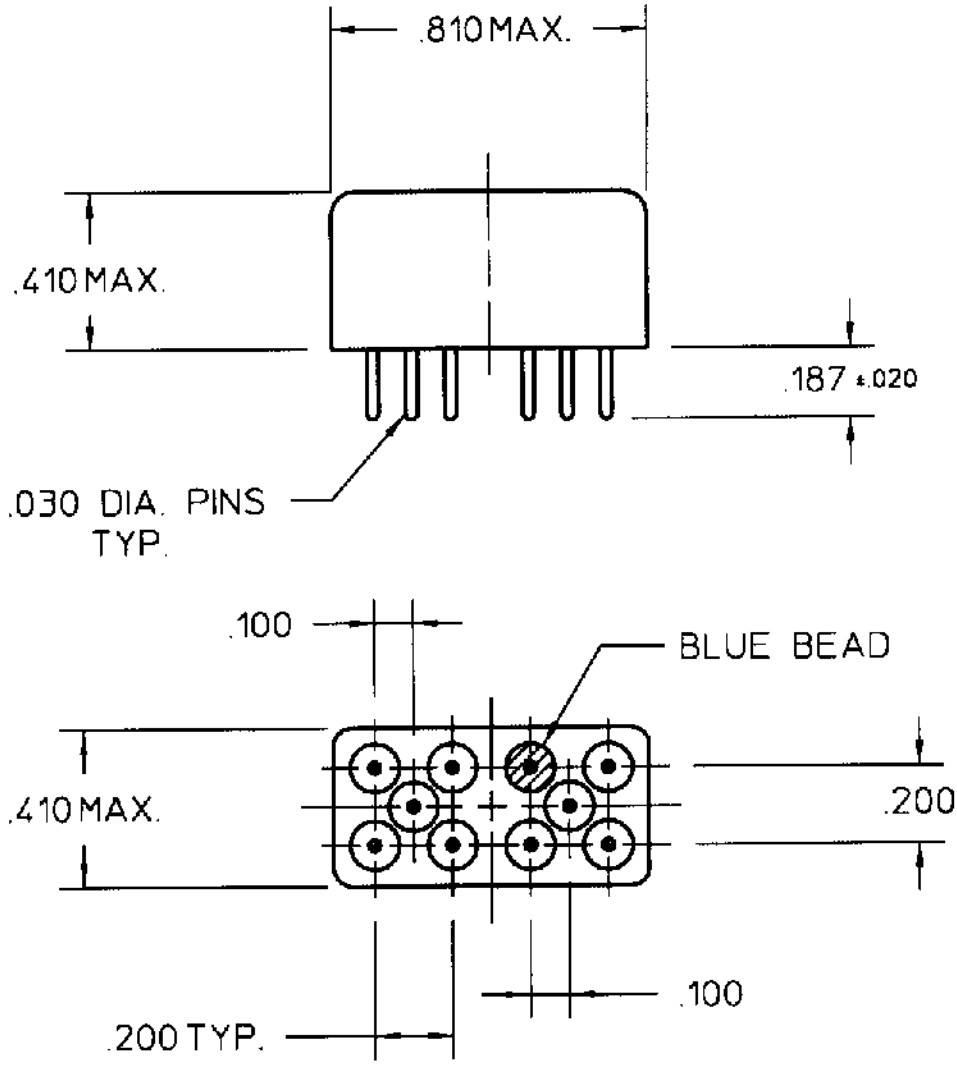


REV. 1 10/24/96

COIL: 26.5 VDC	
WINDING #1	WINDING #2
1000 OHMS ± 10% @ 25° C	1000 OHMS ± 10% @ 25° C
13.0 VDC MUST OPERATE	13.0 VDC MUST OPERATE

ENVIRONMENT:


VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OTHER SPECIFICATIONS IN ACCORDANCE WITH MIL-R-39016/45

CUSTOMER DATA SHEET

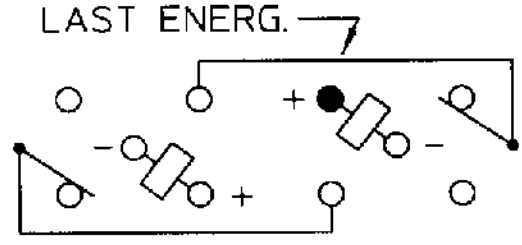

CONTACT RATING: 2 AMPS 30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 3/9/95 | CK. 10/24/96 JB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. COMMERCIAL EQUIV.
CUST. NO. M39016/45-020M

TYPE "LS" RELAY

LS-9520M