463W033

a) Part as supplied

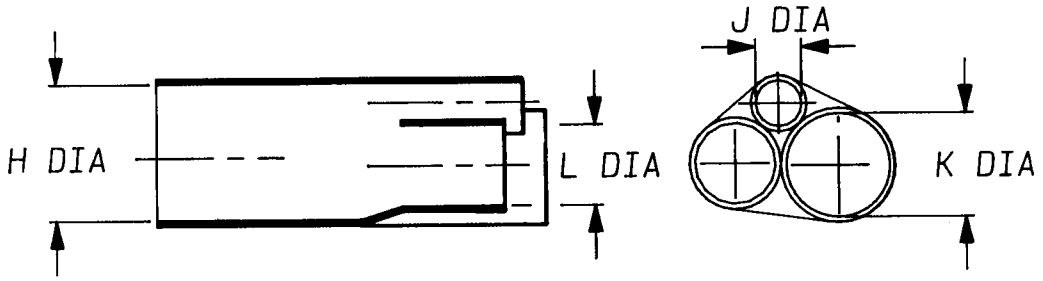

b) Part after unrestricted recovery

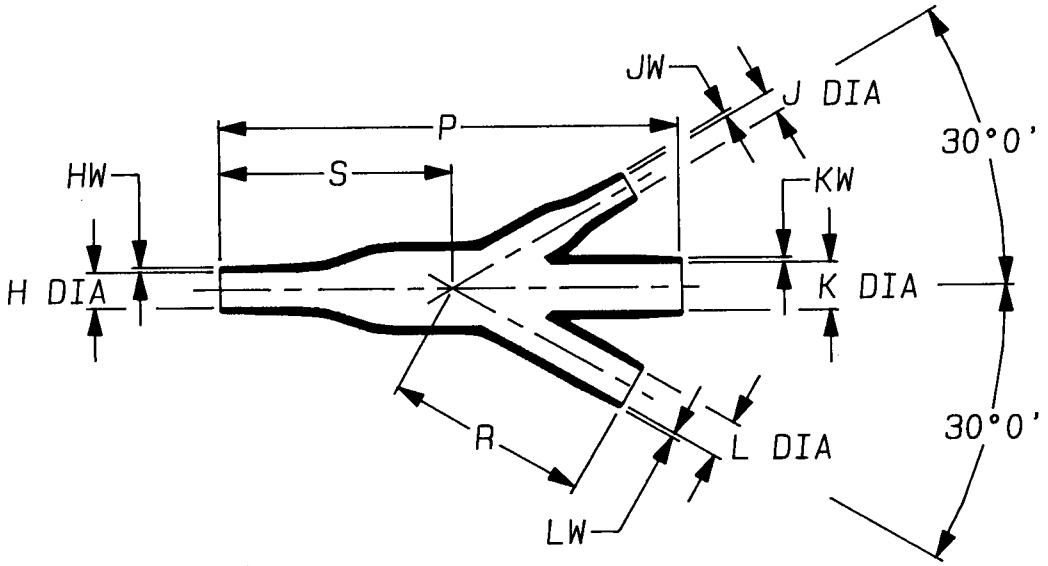

Part No.	H Min a	H Max b	J Min a	J Max b	K Min a	K Max b	L Min a	L Max b	P ±5% b	R ±5% b	S ±5% b	HW ±20% b	JW ±20% b	KW ±20% b	LW ±20% b
463W033	26	5.7	7.0	4.7	18	10.5	14	8.4	95	42	48	2.5	1.0	1.0	1.0

Copyright (!)
Urheberrechte
The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn A.LILLEY. Checked Issue 1 Date August 1999 Conforms to ISO Recommendations
3rd Angle Projection
Not to Scale

Approval
Design MKTG. G.A.

Iss.	Date	E.C.R. No.	Details of Change

Ordering Information

463W033-*/**-0

- Adhesive Slash Number (if required see compatibility chart)
- Material Dash Number (see compatibility chart)
- Base Part Number

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42 , /86
-4	POLYOLEFIN, FLEXIBLE	/42 , /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923