




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C221184	2022-08-04	Ouyang	△B x1





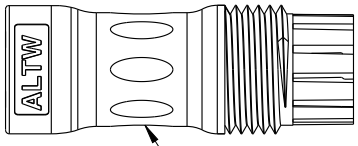







AD-XXBMMA-QL8XP0


02-2Pin
03-3Pin
04-4Pin
05-5Pin

S: With Red Color Seal 1, Cable OD 5.0~6.0mm.
M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.
L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.
A: With Seal 1 & Seal 2 & Seal 3.




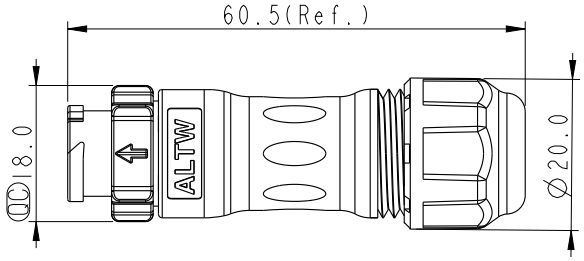


Note: △B
* RoHS Compliant
* (QC) Important Dimension
* Waterproof Rate: IPX8, Mated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper Alloy, Gold Plated
  Nut: Thermoplastic, Black
  O-Ring: Rubber, Gray
* Clamp Ring: Thermoplastic, Black
* Sealing Nut: Thermoplastic, Black
* Seal 1: Rubber,Red,
* Seal 2: Rubber,Yellow,
* Seal 3: Rubber,Blue,
* One set unassembled in one PE bag




2PIN



3PIN



4PIN



5PIN

Pin Assignments Front View

UNIT: mm

TOLERANCE
±0.5mm

TITLE: X-LOK A SIZE FI Male Crimp Type

SCALE	SIZE	SHEET
1:1	A4	1 OF 1

REV.	WC-REV.	
B	.0	(QC): Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ouyang	2022-06-25
DWG NO: AD-XXBMMA-QL8XP0	CHECKED BY: Jerry	DATE: 2022-06-25
CUSTOMER: ALTW	APPROVED BY: Fred	DATE: 2022-06-25

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.