

4P	5.3	22	ASD-04BFFM-QL8CXX
5P	B 5.7	B 22	ASD-05BFFM-QL8CXX
Contacts	Cable OD	AWG	Item No.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2022-02-23	Jiahe Lin	Rev.01 to A, Initial Released
B	C221610	2022-11-21	Allen Pan	B x3

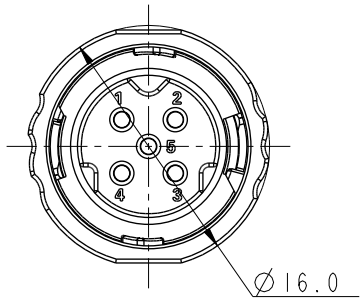


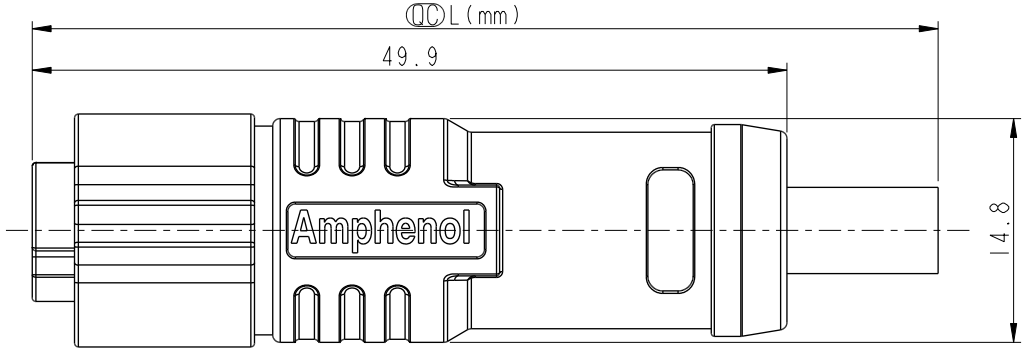


ASD-XXBFFM-QL8CXX

XX: No. Of Pin


XX: L=0~99Meters
01: L=1Meters
02: L=2Meters
:
99: L=99Meters

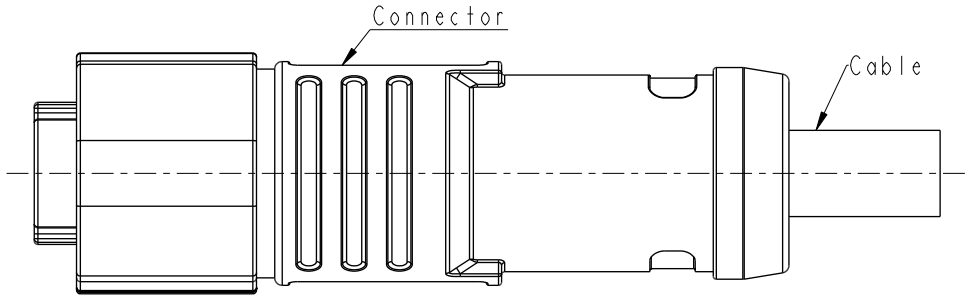

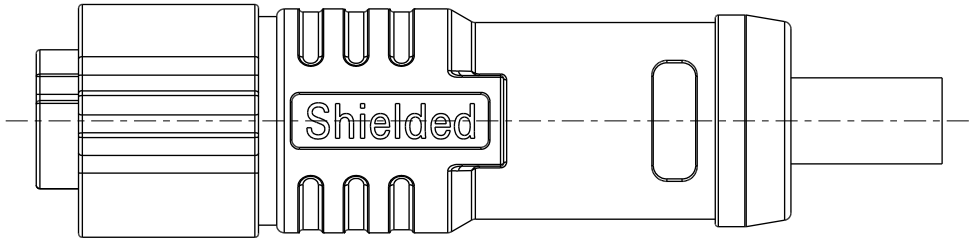


B

Shield Braid	編織	Shield Braid	編織
5	--	5	Gray 灰
4	Black 黑	4	Black 黑
3	Blue 藍	3	Blue 藍
2	White 白	2	White 白
1	Brown 棕	1	Brown 棕
Pin #	Wire	Pin #	Wire



4P



5P

Pin Assignments Front View

Note:
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IPX8, mated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  Shield: Metal
  Nut: Metal
  Outer mold: Thermoplastic, Black
* Cable: UL2517, PVC Jacket, Black
* Cable length tolerance:
  1M: +50/-0 mm
  1M < L ≤ 3M: +100/-0 mm
  3M < L ≤ 5M: +150/-0 mm
  5M < L ≤ 10M: ±100 mm
  10M < L ≤ 20M: ±200 mm
  20M < L ≤ 30M: ±300 mm
  30M < L ≤ 99M: ±500 mm

UNIT: mm

TOLERANCE ±0.5mm

TITLE: XLOK, A SHLD-5A, 05P, CABLE W/O SR

SCALE 2:1 | SIZE A4 | SHEET 1 OF 1 | REV. B | WC-REV. | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY Jiahe Lin	DATE 2022-02-23
DWG NO ASD-XXBFFM-QL8CXX		CHECKED BY Allen Pan	DATE 2022-02-23
CUSTOMER ALTW		APPROVED BY Fred Lee	DATE 2022-02-23

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.