
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|---|---|---|---|---|
| A | | 2021/10/04 | Ruru | Initial Released |
| | | | | |
| | | | | |

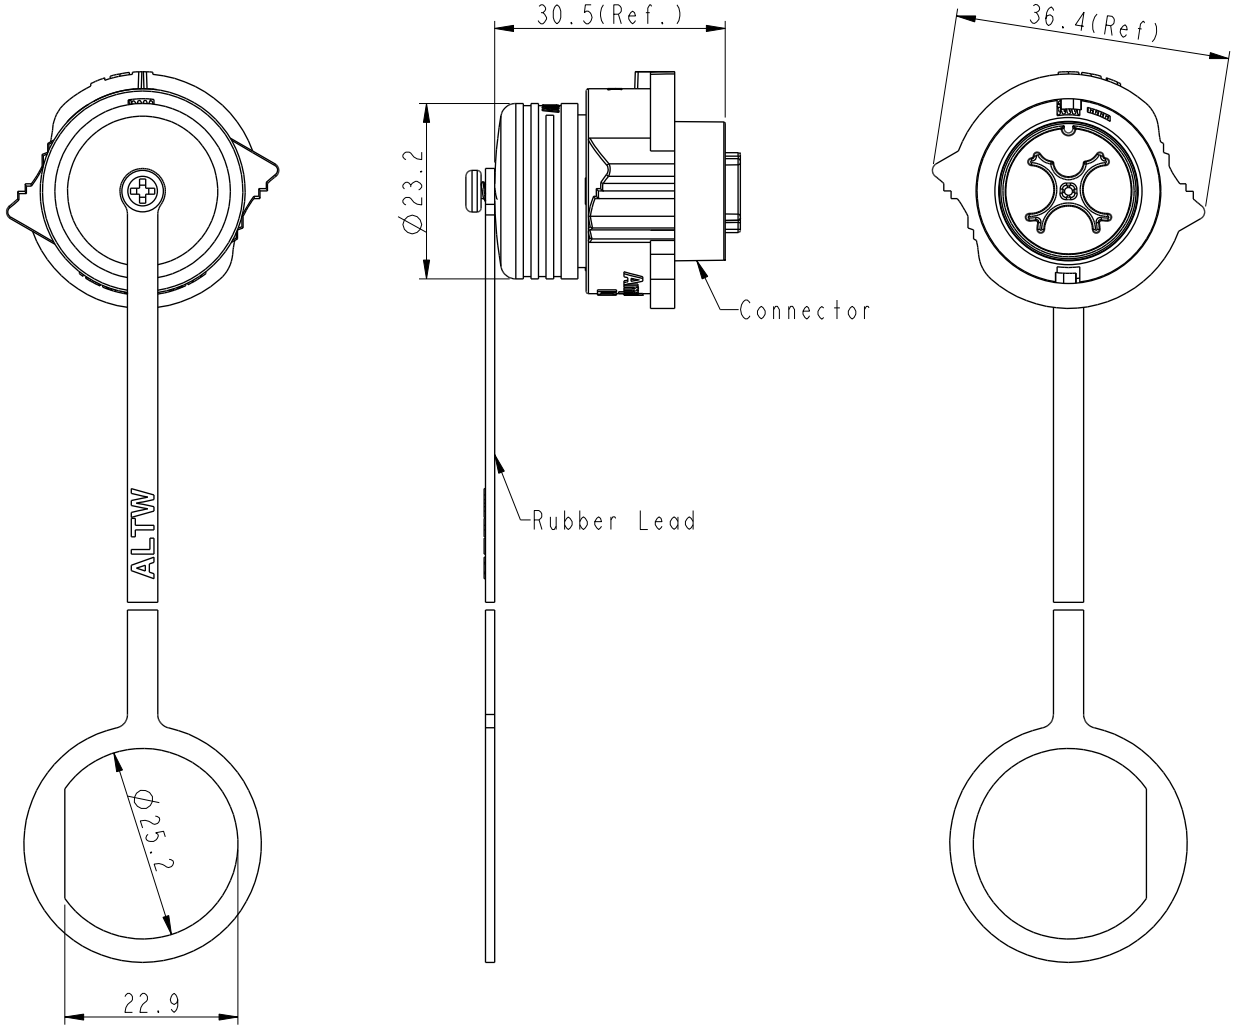


Note:
* RoHS Compliant
* (QC) Important dimension
* Waterproof rate: IPX8, mated 1m/24h
* Connector: Thermoplastic, Black
* Rubber Lead: Rubber, Black
* Screw: Stainless Steel
* Drill Hole Ø2.30mm, Depth 4mm
* Screw is not allowed to tight (Rubber Lead be revolve)

UNIT: mm

TOLERANCE ±0.5 mm

TITLE: ACC, XLOK, WP CAP PUSH LOCK, W/RB LEAD

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. A | WC-REV. A.2 | (QC): Inspection item

**Amphenol LTW**

**安費諾亮泰企業股份有限公司**

| | | | |
|---|---|---|---|
| ITEM NO: CAP-WADMQPC2 | DRAWN BY: Ruru | DATE: 2021-10-04 |
| DWG NO: CAP-WADMQPC2 | CHECKED BY: Rita | DATE: 2021-10-04 |
| CUSTOMER: ALTW | APPROVED BY: Max | DATE: 2021-10-04 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.