REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021/10/07	Ruru	Initial Released

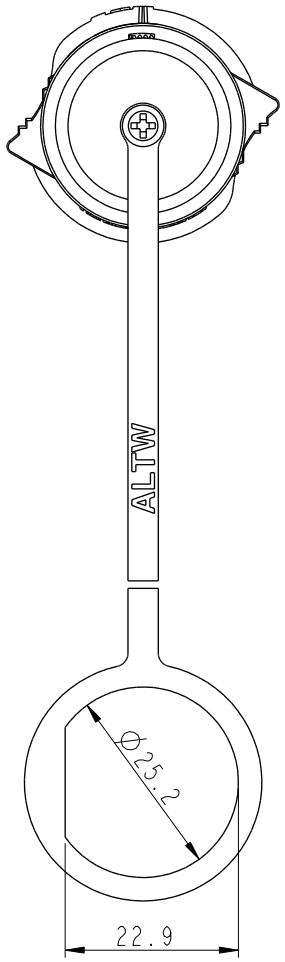

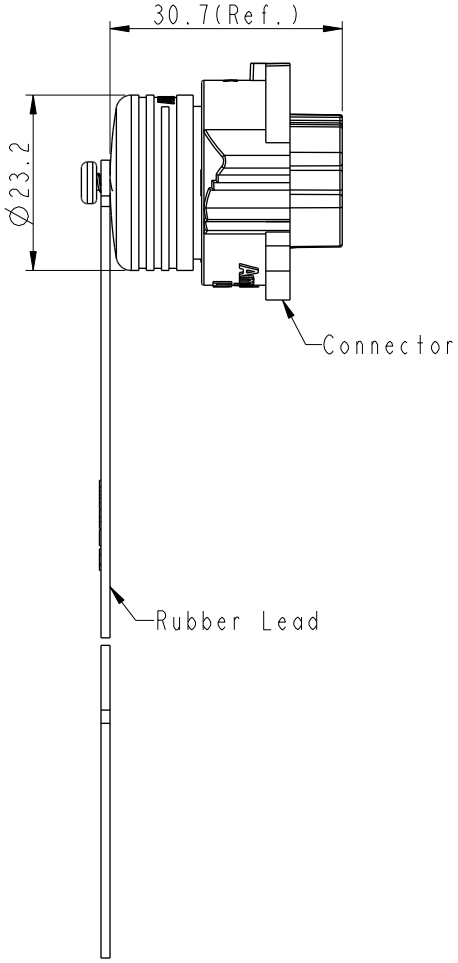

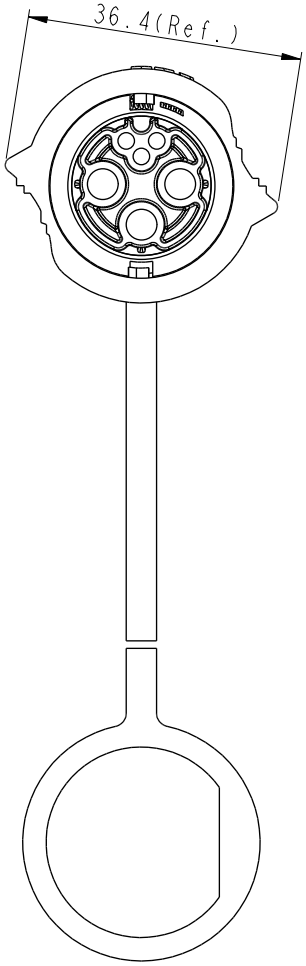

Note:
* RoHS Compliant
* (QC) Important dimension
* Waterproof rate: IPX8, mated 1m/24h
* Connector: Thermoplastic, Black
* Rubber Lead: Rubber, Black
* Screw: Stainless Steel
* Drill Hole Φ2.30mm, Depth 4mm
* Screw is not allowed to tight (Rubber Lead be revolve)

UNIT: mm	TITLE: ACC, XLOK, WP CAP PUSH LOCK, W/RB LEAD	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO: CAP-WADMQPC3 / DRAWN BY: Ruru / DATE: 2021-10-07
TOLERANCE: ±0.5 mm	SCALE: 1:1 / SIZE: A4 / SHEET: 1 OF 1		DWG NO: CAP-WADMQPC3 / CHECKED BY: Rita / DATE: 2021-10-07
	REV.: A / WC-REV.: A.2 / (QC): Inspection item		CUSTOMER: ALTW / APPROVED BY: Max / DATE: 2021-10-07

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.