


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0189	2008/09/15	Shin	Add Notes
C	LEN1740942	2017/04/10	Vicky	Update Logo
D	C190310	2019/03/11	Ruru	Modify Note




5Pin Male Connector
Male Pin PCB Layout





Recommended
Panel Cut-Out




Pin Assignments
Front View



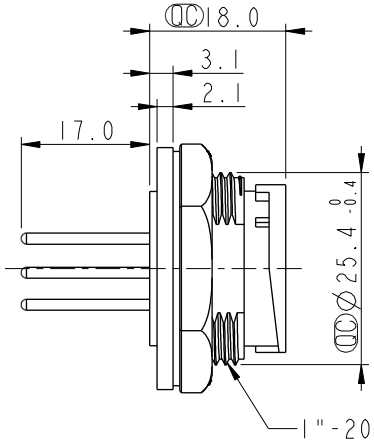

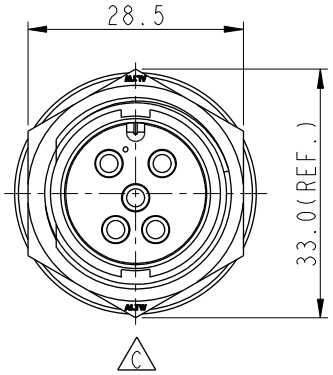

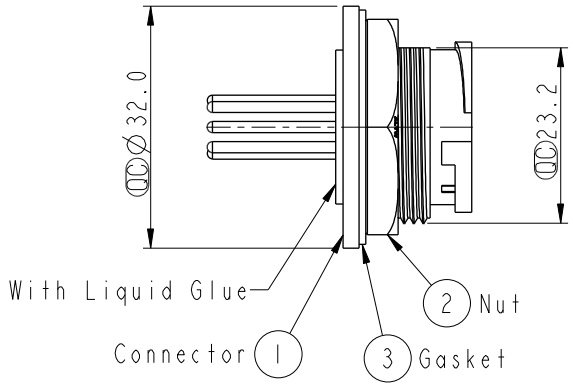

Note: D
* QC Important Dimension
* Waterproof Rate: IP67, Unmated
* Housing: Thermoplastic, Black
* Pin: Copper Alloy, Gold Plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Black
B * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
B * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 4.0mm
* Gasket and Nut are packed separately
in PE bags.

ALTW
CONFIDENTIAL
2019-03-11
R&D DEPT.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: Lock Type Connector For Panel Mount
5Pin Male Connector Male Pin(20A)

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1
REV. D | WC-REV. A.4 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO: DC-05PMMP-LC7001	DRAWN BY: Ruru	DATE: 2019-03-11
DWG NO: DC-05PMMP-LC7001	CHECKED BY: Rita	DATE: 2019-03-11
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2019-03-11

W10814-03-RW01A2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

AMPHENOL LTW:

BD-03BFFA-QL8MP0 PWC-03BFFA-LL7002 RCP5SM-SPG06M-TL7B01 AD-03BMMA-LL7001 DC-05BMFB-QL8APP FLKD-07EGFS-GCP-001 M12A04FL-12AFR-SDA05 M12A04FR-12AFR-SD001 PWM-02BFMB-TL7001 8-03PMMS-SH7002 ASU-08PMMS-QC8A15 CC-03BFMB-QL8APP FLBB-04FGMS-GCP-207 8-04PMMS-SH7002 DC-05BMMA-QL8MPP DT-HCM-G3BMM-RLA60 LAD-05BFFM-QR8D01 M12A-04PFFS-SF8002 MSBP05MR-SBPMR-SB001 ACC-03AFFM-LL7A01 DT-HCM-G3BFF-RLA60 MSBS-05PFFR-SF7003 BSU-10PMMS-SC7001 PWCU-04RMFS-LC7002 Q8DU-05PMMS-QF8001 DD-18BMFA-LL7001 M12A-03PMMS-SF8001 M12A-17BMMM-PL8D04 MSAP-12BMMA-SL7001 RCP5UM-UPG06M-TL7A01