


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021/10/21	Ruru	Initial Released
B	C220628	2022/05/06	Vicky	△B XI


DCD-XXBFFB-QL8001


XX: No. Of Pin







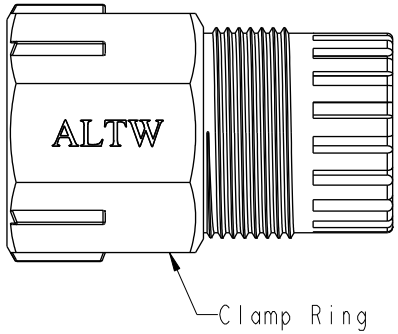








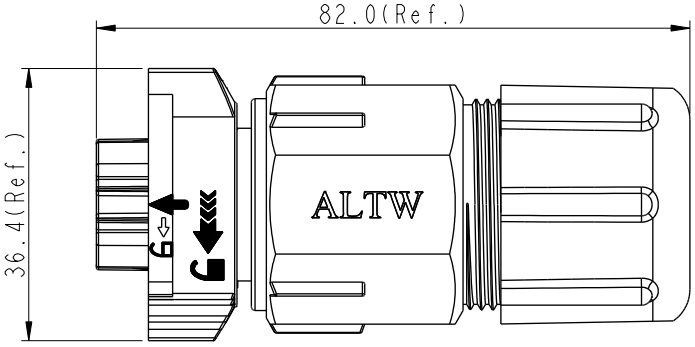



6P

Pin Assignments
Front View

Note:
* RoHS Compliant
* (QC) Important dimension
* Waterproof rate: IPX8, mated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin-1: Copper Alloy, Gold plated
△B Pin-2: Copper Alloy, Nickel plated
  Nut: Thermoplastic, Black
  O-Ring: Rubber, Gray
* Clamp Ring: Thermoplastic, Black
* Sealing Nut: Thermoplastic, Black
* Seal: Rubber, Dark Gray, OD: ∅8.0mm~∅14.5mm
* One set assembled in one pe bag

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: XLOK, D-20A+5A, CABLE W/O SR F, F, FI SCREWIN, PUSH LOCK

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. B | WC-REV. A.3 | (QC): Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2021-10-21
DWG NO: DCD-XXBFFB-QL8001	CHECKED BY: Rita	DATE: 2021-10-21
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2021-10-21

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.