

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C221647	2022-10-20	Ouyang	△B x3




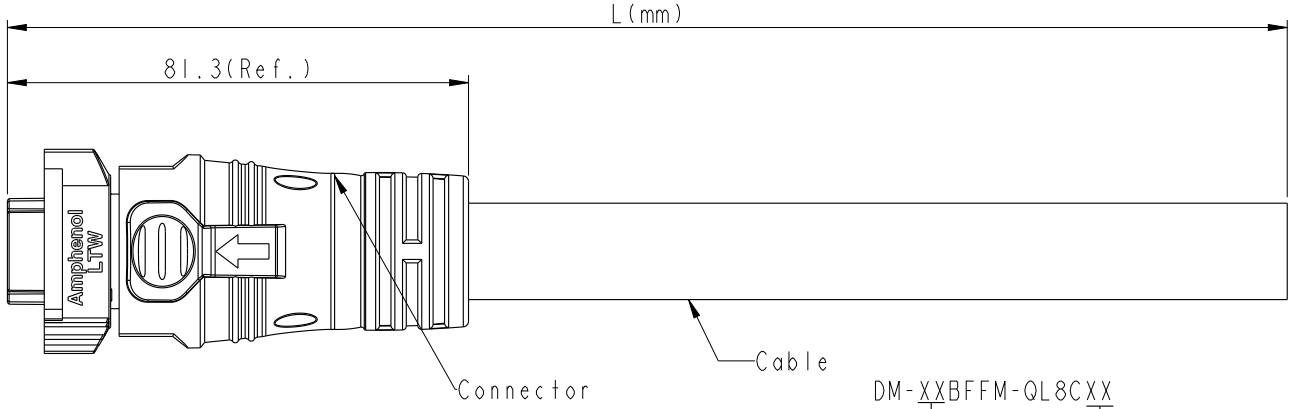


△B XX: No.of PIN

DM-XXBFFM-QL8CXX

XX: 1~99 Meters
01: 1 Meter
02: 2 Meter
:
99: 99 Meter

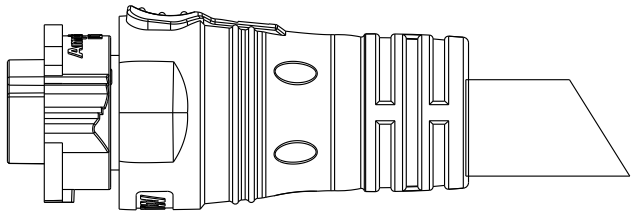


Printing White (QC)

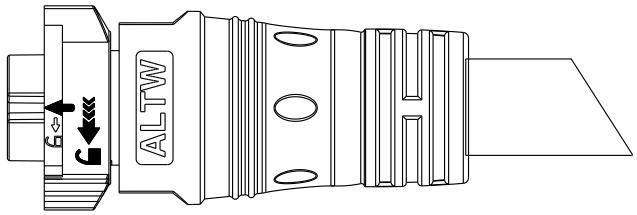

Note:
* RoHS Compliant
* (QC) Important Dimension
* Waterproof Rate: IPX8, Mated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper Alloy, Gold Plated
  O-Ring: Rubber, Black △B
  Nut: Thermoplastic, Black
  Outer Mold: Thermoplastic, Black
* Cable: UL2517, 8#*3C, OD=17.6mm, PVC Jacket, Black
* Cable Length Tolerance: 1M: +50/-0 mm
  1M < L ≦ 3M: +100/-0 mm
  3M < L ≦ 5M: +150/-0 mm
  5M < L ≦ 10M: ±100 mm
  10M < L ≦ 20M: ±200 mm
  20M < L ≦ 30M: ±300 mm
  30M < L ≦ 99M: ±500 mm

Pin	#	Wire
3		Green 綠
2		White 白
1		Black 黑



Pin Assignments
Fronts View

UNIT: mm

TOLERANCE
±0.5mm

TITLE: X-LOK D SIZE POWER CABLE FEMALE 3P

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. B | WC-REV. .0 | (QC): Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ouyang	2022-05-09
DWG NO △B DM-XXBFFM-QL8CXX	CHECKED BY Jerry	DATE 2022-05-09
CUSTOMER ALTW	APPROVED BY Fred	DATE 2022-05-09

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.