


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201472	2020/09/28	Vicky	△C X4
D	C210020	2021/01/07	Vicky	△D X1
E	C210561	2021/04/12	Vicky	△E X3

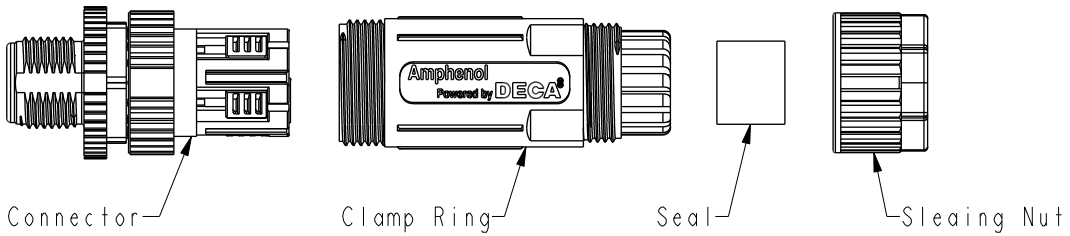

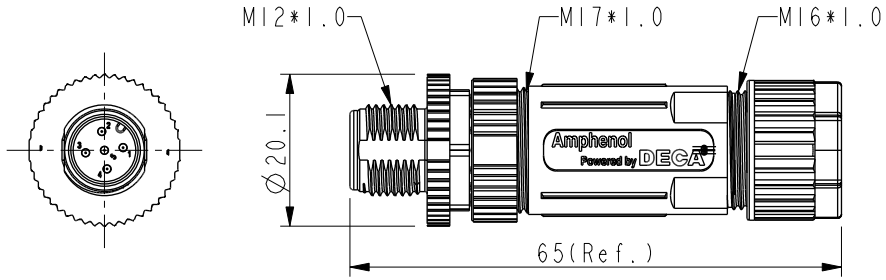

△B △E
Note:
* RoHS Compliant
* (QC) Important Dimension
* Waterproof rate: IPX8, mated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  Extension Nut: Thermoplastic, Black
△C △D Nut: Metal
  O-Ring: Rubber, Gray
* Clamp Ring: Thermoplastic, Black
* Sealing Nut: Thermoplastic, Black
* Seal: Rubber, Gray, OD:∅4.0mm~∅8.0mm
* One set unassembled in one pe bag



5P

Pin Assignments
Front View

△C MI2A-XXBMME-SL8001

XX: No. Of Pin

UNIT:mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

△E

TITLE: N SEN, MI2 A, SCREW CABLE W/O SR, M, M, FI PUSHIN △C △E

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. E | WC-REV. A.4 | (QC):Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY: Allen Pan	DATE: 2019-05-30
DWG NO: △C MI2A-XXBMME-SL8001	CHECKED BY: Fred Lee	DATE: 2019-05-30
CUSTOMER: ALTW	APPROVED BY: Fred Lee	DATE: 2019-05-30

FMW10702-01-02A1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

AMPHENOL LTW:

8-04PMMS-SH7002 AD-03BMMA-LL7001 DT-HCM-G3BFF-RLA60 RCP5SM-SPG06M-TL7B01 ACC-03AFFM-LL7A01 DC-05BMMA-QL8MPP DD-18BMFA-LL7001 LAD-05BFFM-QR8D01 M12A-03PMMS-SF8001 M12A04FL-12AFR-SDA05 RCP5UM-UPG06M-TL7A01 8-03PMMS-SH7002 DC-05BMFB-QL8APP ASU-08PMMS-QC8A15 BSU-10PMMS-SC7001 FLKD-07EGFS-GCP-001 MSAP-12BMMA-SL7001 PWCU-04RMFS-LC7002 Q8DU-05PMMS-QF8001 BD-03BFFA-QL8MP0 CC-03BFMB-QL8APP DT-HCM-G3BMM-RLA60 M12A-04PFFS-SF8002 M12A04FR-12AFR-SD001 MSBP05MR-SBPMR-SB001 MSBS-05PFFR-SF7003 PWC-03BFFA-LL7002 PWM-02BFMB-TL7001 FLBB-04FGMS-GCP-207 M12A-17BMMM-PL8D04