



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201549	2020/10/20	Vicky	△C X4
D	C210025	2021/01/20	Vicky	△D X2
E	C210593	2021/04/19	Ruru	△E X3



Recommended Panel Cut-Out



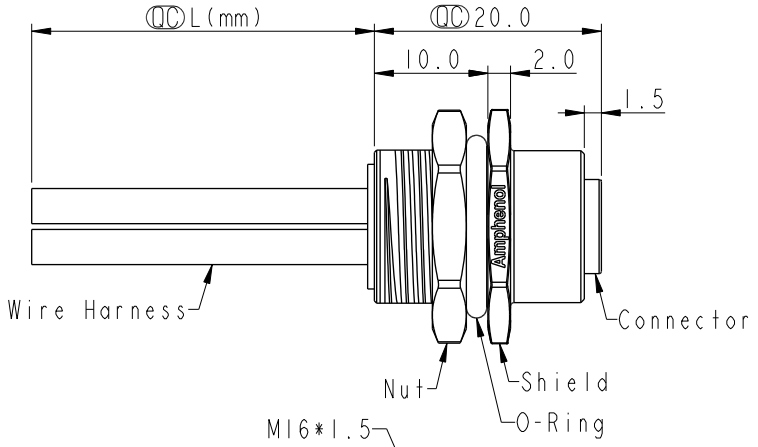




4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

Pin # Wire

Pin Out



4P

Pin Assignments Front View

△B △C △E
MI2T-XXPFFS-SH8CXX

XX: No. Of Pin

10:100mm
15:150mm
20:200mm
∫
95:950mm
Cable Pitch Unit:50mm

A0:1000mm
∫
A5:1500mm
Cable Pitch Unit:100mm
Wire Length(L):150~1500mm

Note: △B △C △D △E
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IPX8, unmated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  O-Ring: Rubber, Green
* Shield: Metal
* Nut: Metal
* O-Ring: Rubber, Black
* Wire harness: UL1015, 16AWG
* For panel thickness max: 4.5mm
* O-Ring and nut are assembled on connectors
* Wire harness tolerance: 100mm: ±10mm
  100mm < L ≦ 300mm: ±15mm
  300mm < L ≦ 1000mm: ±20mm
  1000mm < L ≦ 1500mm: ±50mm

UNIT:mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: N SEN, MI2 T, SCREW RECEPTACLE, F, F, SOLDER △C △E

SCALE 2:1 | SIZE A4 | SHEET 1 OF 1

REV. E | WC-REV. A.1 | QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY: Vicky	DATE: 2019-09-20
DWG NO: △C MI2T-XXPFFS-SH8CXX	CHECKED BY: Rita	DATE: 2019-09-20
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2019-09-20

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.