

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201647	2020/10/26	Vicky	△B X4
C	C210309	2021/03/05	Ruru	△C X3


△B MSAP-XXPMMP-SF8003


XX: No. Of Pin




Recommended Panel Cut-Out




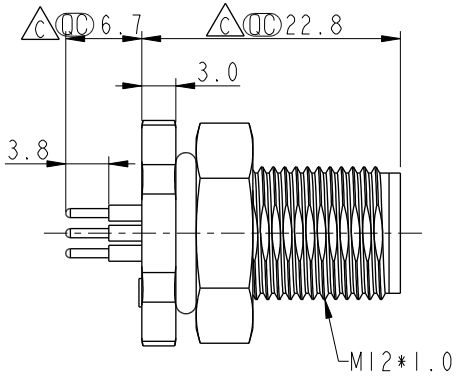






Pin Assignment Front View



PCB Layout

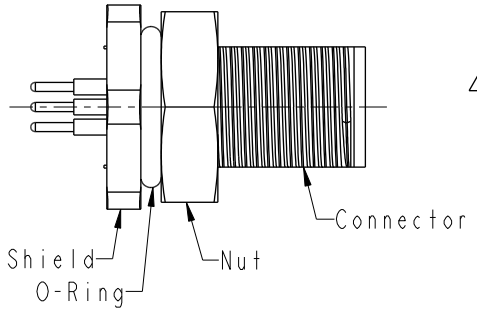

△B △C Note:
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IPX8, unmated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
* Shield: Thermoplastic, Black
* Nut: Thermoplastic, Black
* O-Ring: Rubber, Gray
* For panel thickness max: 4.0mm
* For pcb thickness max: 1.6mm
* Nut is packed separately in pe bag

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: N SEN, MI2 A -PLASTIC, SCREW RECEPTACLE, M, M, PCB S △B

SCALE 2:1 | SIZE A4 | SHEET 1 OF 1

REV. C | WC-REV. A.4 | QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Yulong_wang	2016-12-09
DWG NO △B MSAP-XXPMMP-SF8003	CHECKED BY Jinhai	DATE 2016-12-09
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016-12-09

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

AMPHENOL LTW:

AD-03BMMA-LL7001 FLBB-04FGMS-GCP-207 LAD-05BFFM-QR8D01 M12A04FR-12AFR-SD001 PWCU-04RMFS-LC7002 RCP5UM-UPG06M-TL7A01 ASU-08PMMS-QC8A15 MSBP05MR-SBPMR-SB001 Q8DU-05PMMS-QF8001 BD-03BFFA-QL8MP0 FLKD-07EGFS-GCP-001 M12A-03PMMS-SF8001 M12A04FL-12AFR-SDA05 DC-05BMMA-QL8MPP MSAP-12BMMA-SL7001 MSBS-05PFFR-SF7003 8-03PMMS-SH7002 8-04PMMS-SH7002 DD-18BMFA-LL7001 M12A-04PFFS-SF8002 ACC-03AFFM-LL7A01 DT-HCM-G3BFF-RLA60 M12A-17BMMM-PL8D04 PWC-03BFFA-LL7002 PWM-02BFMB-TL7001 BSU-10PMMS-SC7001 CC-03BFMB-QL8APP DC-05BMFB-QL8APP DT-HCM-G3BMM-RLA60 RCP5SM-SPG06M-TL7B01