



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-870142	2008/07/24	Yuri	Update Drawing
C	LENI741293	2017/04/19	Vicky	Update Logo




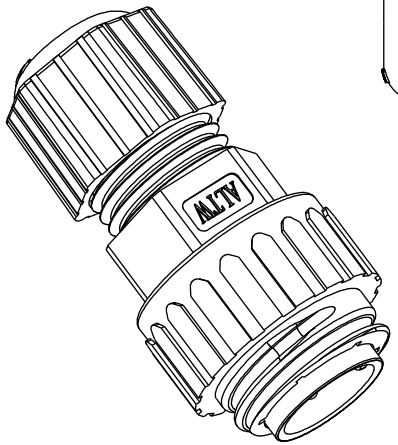











ALTW
DCC. DEPT.
CONFIDENTIAL
2017.04.26
ISSUED

ALTW
CONFIDENTIAL
2017-04-19
R&D DEPT.



Pin Assignments
Front View

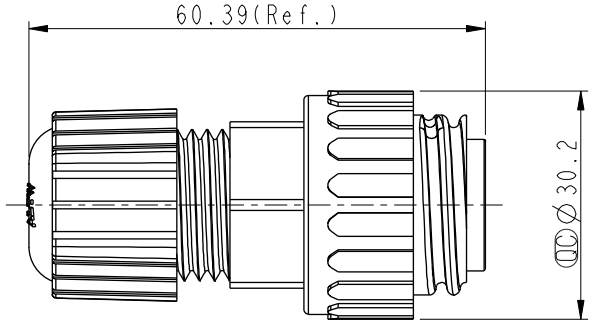

Note:
* QC Important Dimension
* Waterproof Rate: IP67
* Seals for Cable OD:Ø5.5mm~Ø10.8mm
  (防水墊圈限用線徑:Ø5.5mm~Ø10.8mm)
* One Set Unassembled in One LTW Sealed Bag
  (每一組未組裝,放置於一個 Amphenol LTW封口袋)
* Housing: Nylon+GF, Black
* Male Pin: Copper Alloy, Gold Plated
* Screw Nut: Nylon+GF, Black
B * Gasket: Silicone, Black
* Clamp Ring: Nylon, Black
* Seals: EPDM, Black
* Sealing Nut: Nylon, Black
* Liquid Glud :Claer

UNIT:mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: Power,Assy Screw 2Pin M Conn M Pin
SCALE: 1:1 | SIZE: A4 | SHEET: 1 OF 1
REV.: C | WC-REV.: A.3 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO: PWF-02BMMA-SL7001	DRAWN BY: Vicky	DATE: 2017-04-19
DWG NO: PWF-02BMMA-SL7001	CHECKED BY: Rita	DATE: 2017-04-19
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2017-04-19

FMW10702-01-02A1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

AMPHENOL LTW:

FLKD-07EGFS-GCP-001 M12A-17BMMM-PL8D04 DT-HCM-G3BFF-RLA60 AD-03BMMA-LL7001 BD-03BFFA-QL8MP0 DT-HCM-G3BMM-RLA60 M12A-03PMMS-SF8001 M12A04FL-12AFR-SDA05 8-04PMMS-SH7002 M12A04FR-12AFR-SD001 MSAP-12BMMA-SL7001 MSBP05MR-SBPMR-SB001 RCP5UM-UPG06M-TL7A01 PWM-02BFMB-TL7001 8-03PMMS-SH7002 ASU-08PMMS-QC8A15 BSU-10PMMS-SC7001 DC-05BMMA-QL8MPP MSBS-05PFFR-SF7003 Q8DU-05PMMS-QF8001 CC-03BFMB-QL8APP DC-05BMFB-QL8APP LAD-05BFFM-QR8D01 PWC-03BFFA-LL7002 PWCU-04RMFS-LC7002 RCP5SM-SPG06M-TL7B01 M12A-04PFFS-SF8002 ACC-03AFFM-LL7A01 DD-18BMFA-LL7001 FLBB-04FGMS-GCP-207