




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C200380	2020/03/30	JC Chen	B X1

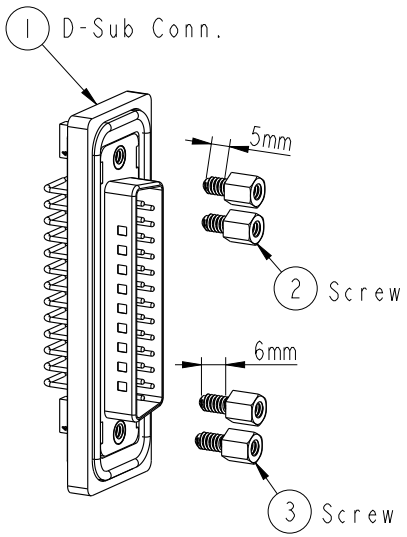




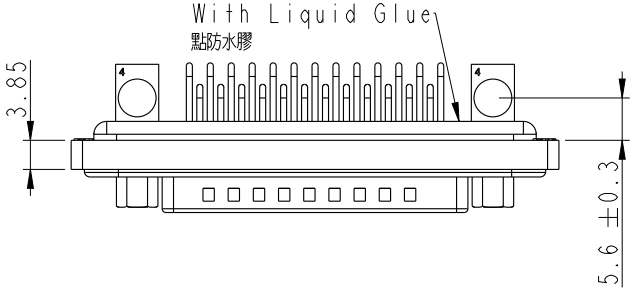




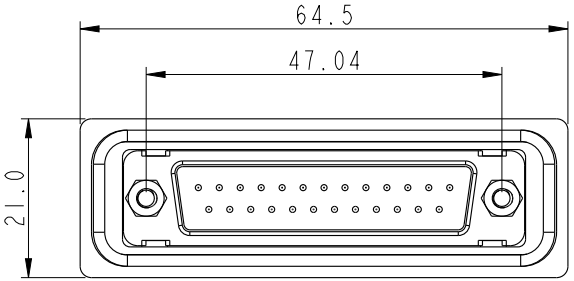

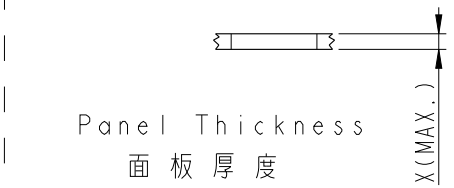


Screw L=5.0 For Panel Thickness Under 1.2mm
適用板厚1.2mm以下

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm
適用板厚1.2~2.0mm以下

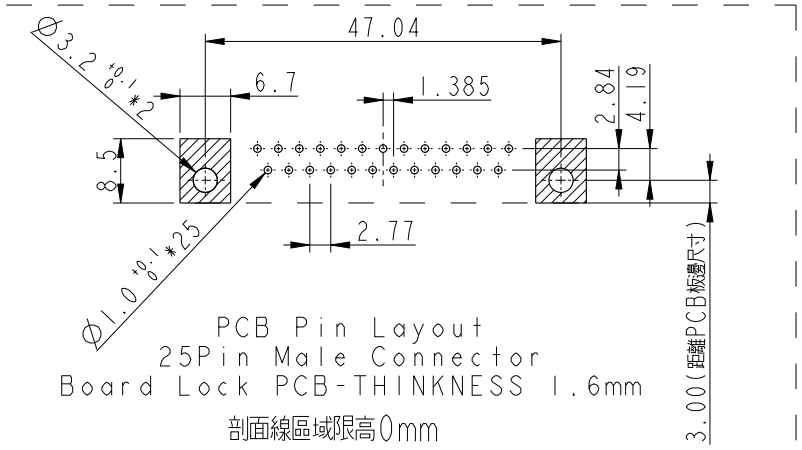

PCB Pin Layout
25Pin Male Connector
Board Lock PCB-THINKNESS 1.6mm
剖面線區域限高0mm

Note:
* QC Important Dimension.
* Waterproof Rate: IP68
  IP68: 1M of depth of water 24 hours
  (IP68: 1米水深24小時)
* Do Mating Test After Glued
  點膠後,須作對插測試
* D-SUB Conn.: Black Core,PBT
* Plastic Jacket: Black,Nylon+GF
* Pin: Copper Alloy , Gold Plated
* Ring: Light Blue,Silicone
* Screw: Copper Alloy,Nickel Plated,#4-40 UNC
* The 90° Board Lock Needs To Connect The Iron Shell
  L型支架需接鐵殼

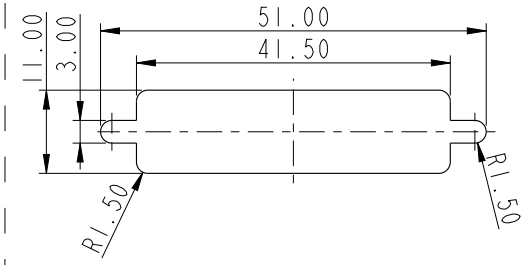

Recommended Panel Cut-Out
建 議 挖 孔 尺 寸

UNIT:mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: D-SUB Connector 25Pin Male For Panel,PCB 90° Board Lock

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. B | WC-REV. A.3 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
SDB-25PMMP-SB8001	Yulong_wang	2016-05-24
DWG NO: SDB-25PMMP-SB8001	CHECKED BY: Cary	DATE: 2016-05-24
CUSTOMER: ALTW	APPROVED BY: Jerry	DATE: 2016-05-24

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

AMPHENOL LTW:

AD-03BMMA-LL7001 ASU-08PMMS-QC8A15 RCP5UM-UPG06M-TL7A01 DC-05BMMA-QL8MPP PWC-03BFFA-LL7002 DT-HCM-G3BMM-RLA60 LAD-05BFFM-QR8D01 M12A-03PMMS-SF8001 M12A-17BMMM-PL8D04 RCP5SM-SPG06M-TL7B01 DC-05BMFB-QL8APP M12A-04PFFS-SF8002 PWM-02BFMB-TL7001 BD-03BFFA-QL8MP0 DD-18BMFA-LL7001 DT-HCM-G3BFF-RLA60 FLBB-04FGMS-GCP-207 M12A04FR-12AFR-SD001 MSBS-05PFFR-SF7003 Q8DU-05PMMS-QF8001 8-04PMMS-SH7002 CC-03BFMB-QL8APP PWCU-04RMFS-LC7002 BSU-10PMMS-SC7001 FLKD-07EGFS-GCP-001 8-03PMMS-SH7002 ACC-03AFFM-LL7A01 M12A04FL-12AFR-SDA05 MSAP-12BMMA-SL7001 MSBP05MR-SBPMR-SB001