




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LENI160059	2011/03/04	Doreen	Change Dimension View.
C	C221447	2022/09/15	Ruru	△C X4







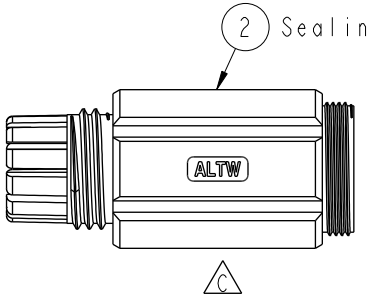





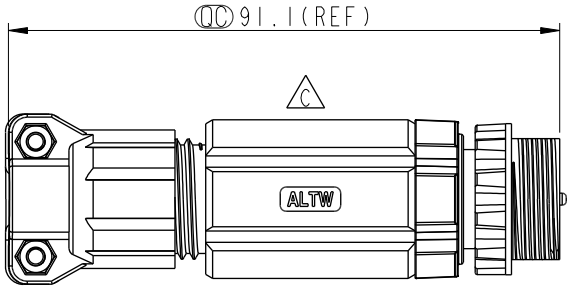



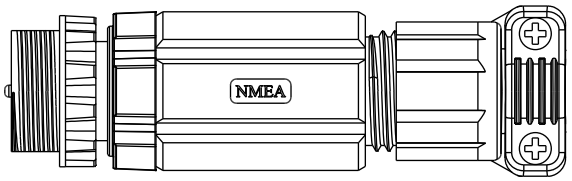





Conn.
Pin Assignments
Front View

Conn.	Name	Pair	Wire Color For User △B
5	NET-L	Signal	Blue 藍 (18AWG)
4	NET-H	Signal	White 白 (18AWG)
3	NET-C	Power	Black 黑 (15AWG)
2	NET-S	Power	Red 紅 (15AWG)
1	Shield	Drain	Bare (18AWG)

Pin Out

△C Note:
* ⓆⒸ Important Dimension.
* Waterproof Rate : IP67
* Connector: Thermoplastic, Black
* Pin: Copper Alloy, Gold Plated
* O-Ring: Rubber, Gray.
* Holder: Thermoplastic, Black.
* Gasket: Rubber, Black.
* Sealing Nut: Thermoplastic, Black.
* Nut: Metal.
* Seals For Cable OD ∅8mm~∅12.2mm
* 使用溫度: -20° C~70° C

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: NMEA, MN 8A(APP), 05P △C
CABLE W/O SR, M, M, FI SCREWIN

SCALE 1:2 | SIZE A4 | SHEET 1 OF 1
REV. C | WC-REV. A.2 | ⓆⒸ: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
UMN-05BMMB-SL7001	Dorren	2011/03/04
DWG NO: UMN-05BMMB-SL7001	CHECKED BY: Winnie	DATE: 2011/03/04
CUSTOMER: ALTW	APPROVED BY: Kevin	DATE: 2011/03/04

WI0814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

AMPHENOL LTW:

DC-05BMFB-QL8APP DT-HCM-G3BFF-RLA60 M12A-17BMMM-PL8D04 BD-03BFFA-QL8MP0
M12A-04PFFS-SF8002 ACC-03AFFM-LL7A01 DC-05BMMA-QL8MPP FLBB-04FGMS-GCP-207
M12A04FL-12AFR-SDA05 M12A04FR-12AFR-SD001 ASU-08PMMS-QC8A15 LAD-05BFFM-QR8D01
MSAP-12BMMA-SL7001 PWCU-04RMFS-LC7002 Q8DU-05PMMS-QF8001 RCP5SM-SPG06M-TL7B01
RCP5UM-UPG06M-TL7A01 DD-18BMFA-LL7001 MSBP05MR-SBPMR-SB001 PWM-02BFMB-TL7001
8-04PMMS-SH7002 DT-HCM-G3BMM-RLA60 M12A-03PMMS-SF8001 CC-03BFMB-QL8APP
FLKD-07EGFS-GCP-001 MSBS-05PFFR-SF7003 8-03PMMS-SH7002 AD-03BMMA-LL7001
BSU-10PMMS-SC7001 PWC-03BFFA-LL7002