





METAL NUT

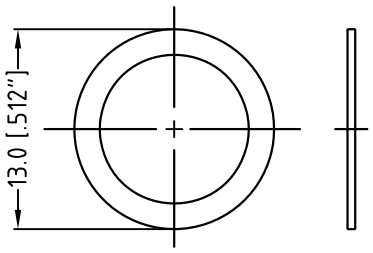

METAL WASHER


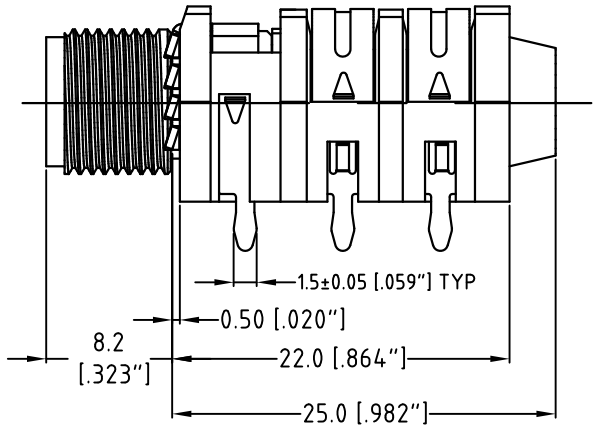


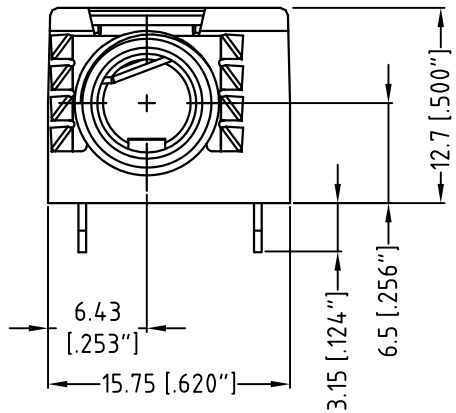


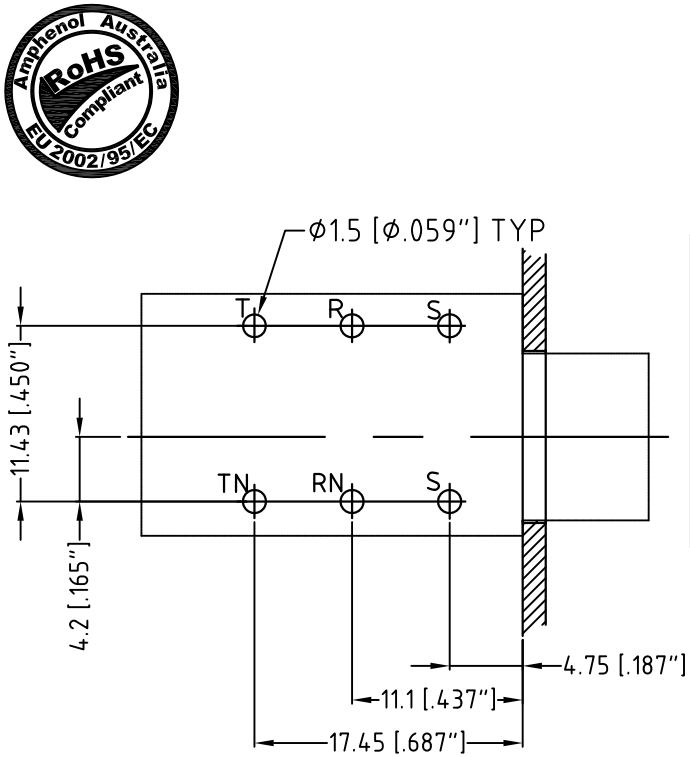

RECOMMENDED PCB - LAYOUT

TOLERANCE: ±0.05mm [.002"]

PART NO.	ACJM-LHOM	ACJS-LHOM	NO NUT & WASHER
	ACJM-MHOM	ACJS-MHOM	METAL NUT & WASHER
SCHEMATIC			HARDWARE OPTION

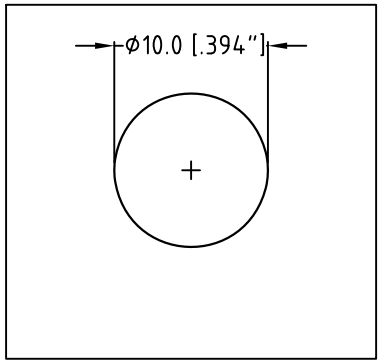

PANEL CUTOUT

NOTE: NUT TO CONNECTOR ASSEMBLY - MAX TORQUE FORCE IS 1.75N/m

REV.	CHANGE DETAILS	BY	DATE	CHG/No
2	ADD PART NUMBERS FOR NO HARDWARES	MH	27-03-15	----
1	UPDATE DRAWING TO MEET PRODUCTION PART	MH	10-02-10	----
0	FIRST ISSUE	M.N.H	06-02-07	-----

UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE
LINEAR: X ± 0.5, X.X ± 0.2, X.XX ± 0.1
ANGULAR: X° ± 1°, X°X' ± 30', X°X'X" ± 15'
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS
DO NOT SCALE
DIMENSIONS IN MILIMETRES

THIS DOCUMENT IS THE PROPERTY OF AMPHENOL AUSTRALIA PTY. LTD.. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER

THIRD ANGLE PROJECTION

CAD FILE:	55010411000112	DRN:	M.N.H	DATE: 06-02-07	TITLE: 1/4" PHONE OFFSET JACK CUSTOMER DRAWING
MATL:	SEE NOTES	CKD:	M.H.	DATE: 27-03-15	
FINISH:	SEE NOTES	APP'D:	P.M	DATE: 27-03-15	
SCALE:	1:1	PART No:	REFER TO SCHEMATIC	SIZE: A4	DRAWING NO. 55010411-000-1 SHEET 1 OF 1

Amphenol
Amphenol Australia Pty.Ltd, 22 Industry Blvd, Carrum Downs, Vic.3201

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

95157-140LF CD15S13E4RV09LF DAPO15S365TLF LD15P33E4GV00LF 54202-S08-07LF 69192-408HLF 86093967896755LF 86130202123355E1LF 70218-1116LF 91614-403ALF RJE061661210 68002116HLF 70234-112LF RJSBE5080C2 65781-158 86093968813H45V1LF DCMF37P DEM09P032N 68000-236HLF 68001-200HLF 76384-316LF 54202-G0805CLF 70430-164LF 86093968191755E3LF 86093488314745V1LF 863013A D15P13A6RV12LF LD25S33E4GV00LF 67996-204HLF 68001-108HLF