

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				. .	△				. .
△				. .	△				. .
△				. .	△				. .

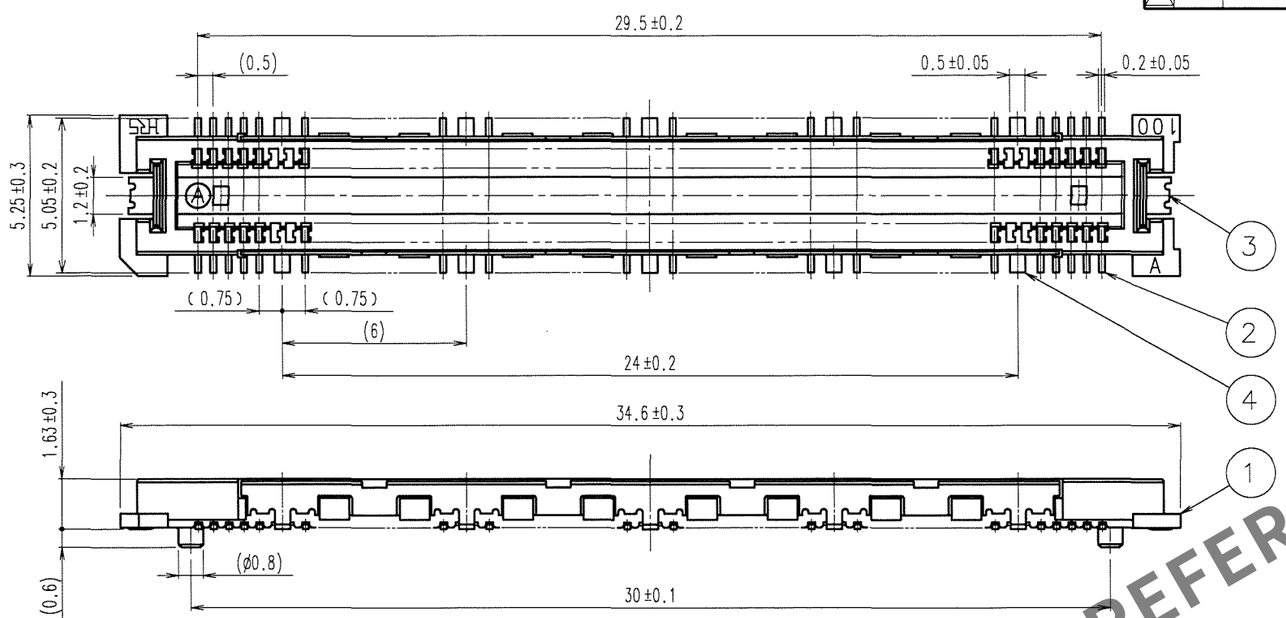


RECOMMENDED LAND PATTERN DIMENSION OF PCB

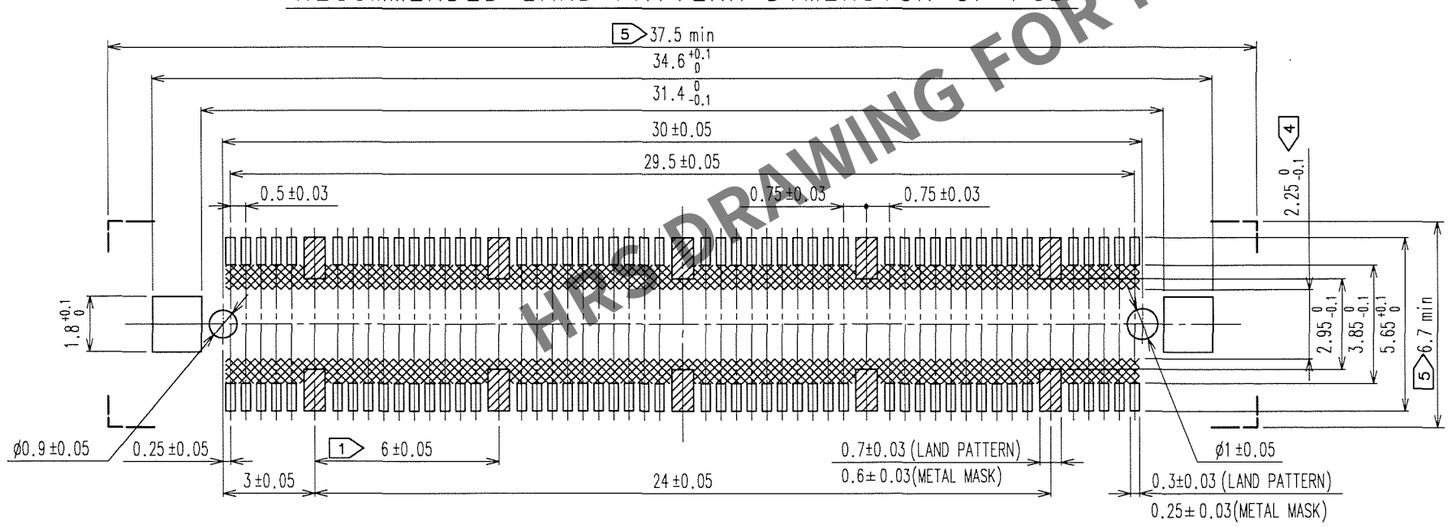

SIGNAL PORTION CROSS SECTION (10 : 1)

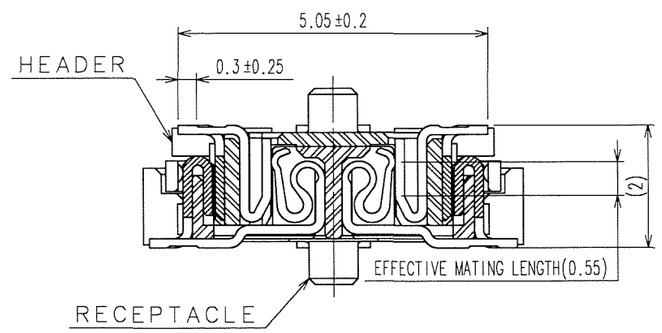

GROUND PORTION CROSS SECTION (10 : 1)

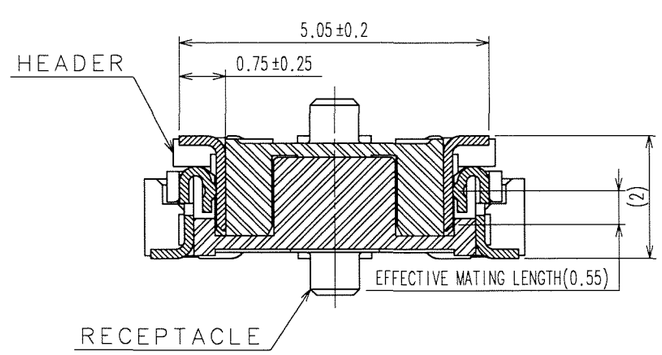

HRS DRAWING FOR REFERENCE

NOTES 1 10 HATCHED ▨ PARTS:GROUND CIRUIT.
2 SMT LEAD-COPLANARITY:0.1 MAX.
3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED ▩ AREA.)
5 DO NOT MOUNT OTHER DEVICES ONTO ⊏ ⊐ AREA ,OR MATING PAIR CANNOT BE MATED.
6 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

NO.	MATERIAL	FINISH, REMARKS
4	PHOSPHOR BRONZE	TIN PLATING
3	PHOSPHOR BRONZE	TIN PLATING
2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min. LEAD AREA : GOLD FLASH UNDER PLATING : NICKEL 1μm min.
1	LCP	BEIGE UL94V-0

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	S.KAMIGA 06.09.25	H.Nakamura '06.09.25	H.Ozawa '06.09.26	H.Okawa '06.09.26	


SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-152094-22	FX11LA-100P/10-SV(92)
UNITS mm	HRS HIROSE ELECTRIC CO.,LTD.	CODE NO. CL573-0004-2-92 1/2

TO
PCK


FORM NO.229

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

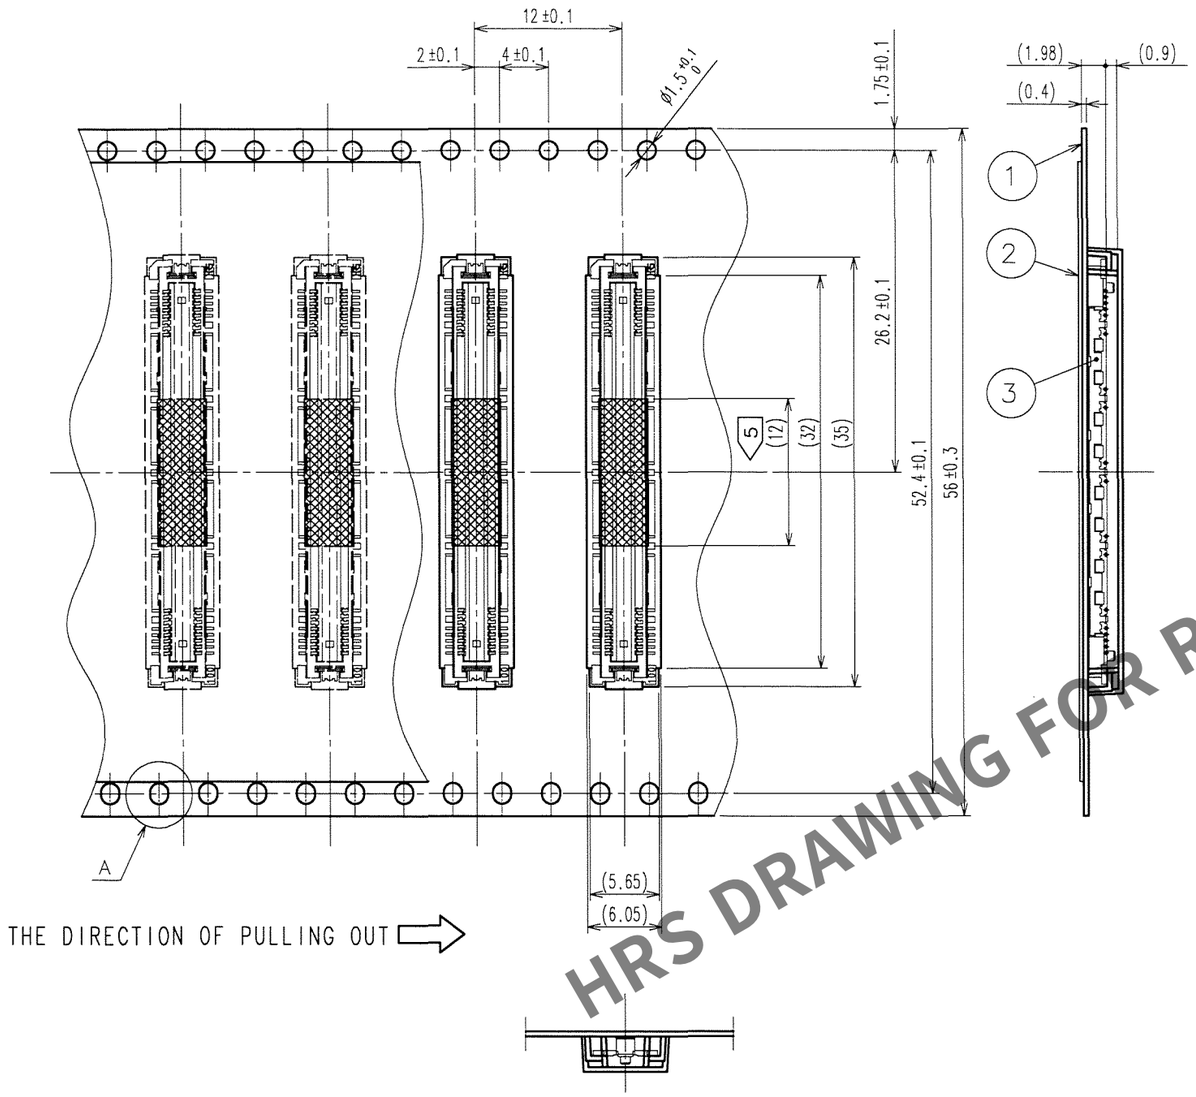


REELED DIMENSION(Free)

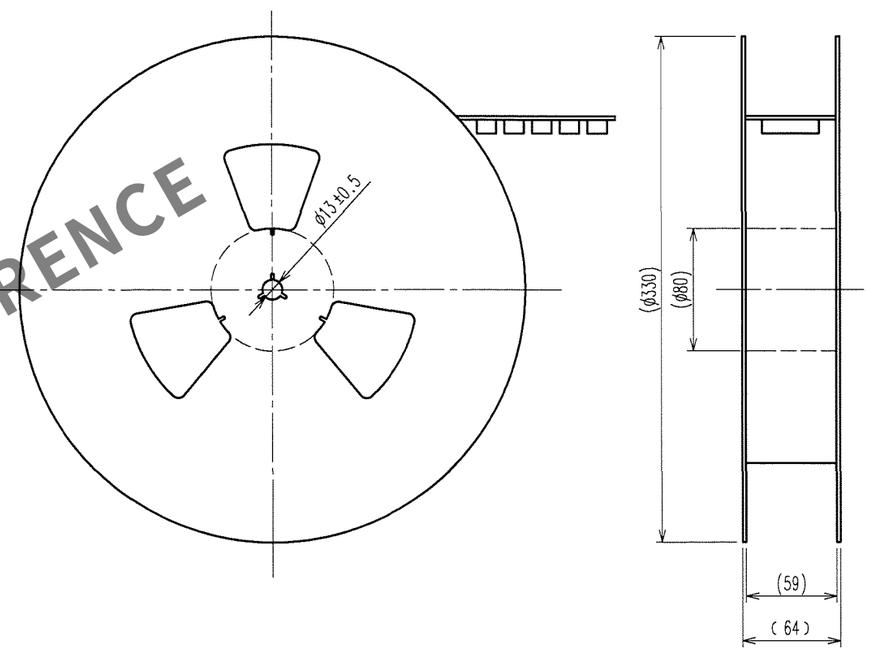


HRS DRAWING FOR REFERENCE

A(5:1)



DETAIL FOR VACUUM PICKUP(5:1)



NOTES 1 1REEL:1000 CONNECTORS.
2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
3 THIS PRODUCT HAS NO POLAVITY TO TAPE AND REEL PACKAGING.
4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
5 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
2	PET	(TOP COVER TAPE)	4	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
1	PS	(EMBOSSED CARRIER TAPE)	3		(CONNECTOR)

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	S.KAMIGA	H.Nakamura	H.Ozawa	H.Okawa	
	06.09.25	06.09.25	06.09.26	06.09.26	

TO
PCK

SCALE 2 : 1
UNITS mm

DRAWING NO. EDC3-152094-22
PART NO. FX11LA-100P/10-SV(92)
HRS HIROSE ELECTRIC CO.,LTD.
CODE NO. CL573-0004-2-92 2/

FORM NO.229

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

DF11-16DP-2DSA(24) DF19A-3032SCFA(41) DF40C-50DP-0.4V(51) DF62C-4S-2.2C ZE05-24DP-2H FX8-120S-SV(22) HDE-CTH(10) RM15TP-2PA(81) DF36A-25P-SHL GT8E-6S-HU DF17(3.0)-40DS-0.5V(57) ZE05H-12DP-2H ZE05H-4P-2V(A) BM29B0.6-4DS/2-0.35V(51) DF57AH-5S-1.2C DF59M-2224PCF FH41-50S-0.5SH(28) RM12BRD-2PH(81) FH35C-19S-0.3SHW(50) ZE064W-8DP-HU/R(A) ZH05-20DP-HU(B) DF33C-4S-3.3C DF52-4P-0.8C DF65-4P-1.7V(21) FH41-30S-0.5SH(05) FX18-80S-0.8SH DF22A-1416SCFA FH72-21S-0.3SHW FX18-60S-0.8SH RM15TRH-10PH(81)