
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO. **RFN-1021-5**

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	CZS	7/17/98	R. RICE
B	CHANGE FORMAT, SPECS & DWG # 8889	GGG	1/21/02	JDMc

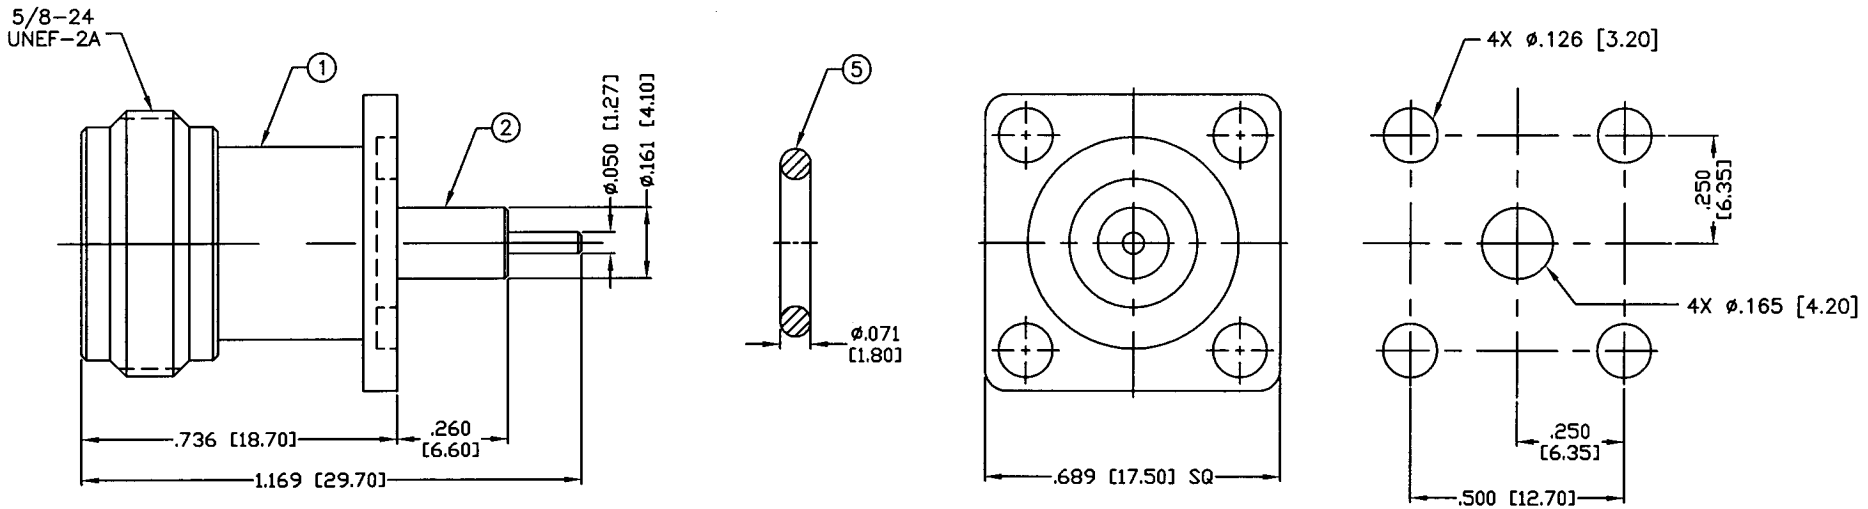

RECOMMENDED
MOUNTING CONFIGURATION

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0–11 GHz
WORKING VOLTAGE: 1k V rms @ sea level
TEMPERATURE RANGE: –65°C TO 85°C
INSULATION RESISTANCE: 5k M Ohms min.

#	DESCRIPTION	QTY	MATRL	FINISH
1	BODY	1	BRASS	NICKEL, 100 µ"
2	INSULATOR	1	PTFE	---
3	PIN	1	PHOS BRONZE	GOLD, 3µ"
4	RING	1	BRASS	NICKEL, 100µ"
5	GASKET	1	SILICONE	---
6				
7				
8				
9				
10				
11				
12				
13				
14				

008974

APPROVALS	DATE
DRAWN G. GALLEGOS	1/21/02
CHECKED	1-24-02
ORJ DRAWN C. ZUNIGA	3/17/98

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX.
3. CHAMFER 1ST & LAST THREADS 45°
4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS	DIAMETER
.XXX±.003 [.08]	.XXX±.001 [.03]
.XX±.005 [.13]	.XX±.003 [.08]

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD
SAN DIEGO,CA 92126
(858) 549-6340
(858) 549-6345 FAX

N JACK

MINI 4 HOLE FLANGE

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFN-1021-5	B

SCALE:	CAD FILE	SHEET
NTS	OUTLINE	1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

RF Industries:

RFU-632 RFW-12404-30-5 COMP-TM-400PL RFT-1239 RFU-602-2 RSA-3252-C RF123-7052-1B RFB-1124-1X RSA-3402 RFD-1610DS-H4 RFN-1007-2SX RFU-507-SI RFU-600-6C1 RFU-601-3 RFU-633 RF123-7002-B RFB-1137 RFD-225M-SR2 RFU-500 RFU-600-5 RQA-5000-SR2LP RSA-3478 RFU-601-1X RFW-5573-16 RQA-5010-SR2LP RQN-1300-SR2 RFD-1601-HPL RFU-505 RFW-5573-60 RFW-5573-7