

Description	Material	Finish
Body	Brass	Nickel
Socket	BE CU	Gold
Insulation	PTFE	N/A
Gasket	SI Rubber	Rubber
Crimp Ring	Brass	Nickel
Heat Shrink	Polyolefin	Black


REVISIONS			
REV	DESCRIPTION	DATE	APPV
B	Updated footprint and dimensions; Added new title block	2-JUL-12	SAH

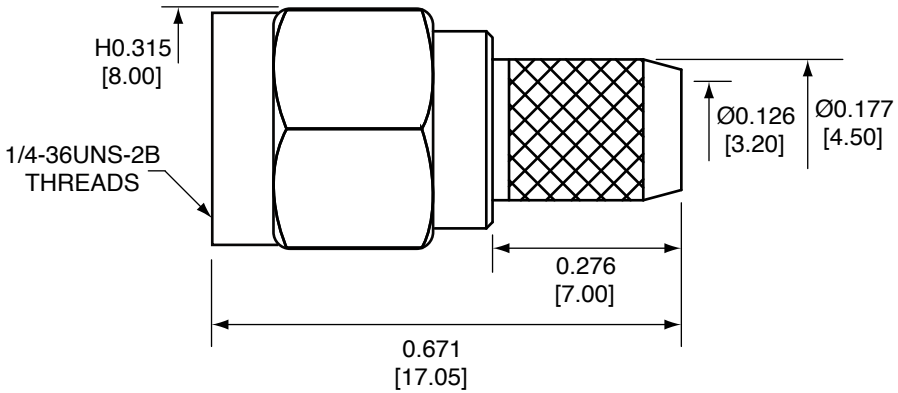


SIDE VIEW

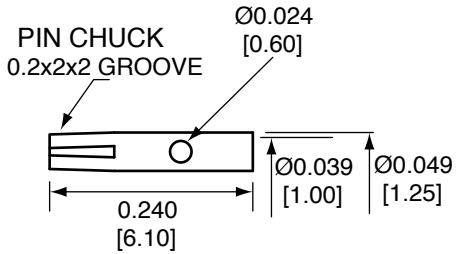

SOCKET

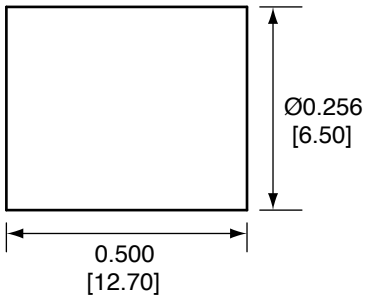


CRIMP RING

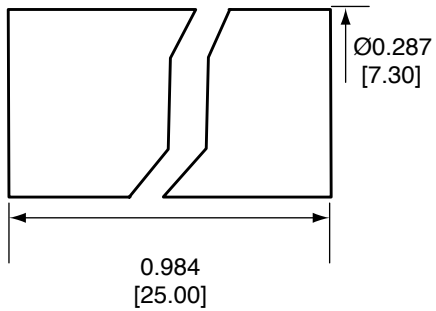

HEAT SHRINK

CONREVSMA007-R58 ASSEMBLY INSTRUCTIONS

1. Strip cable to recommended dimensions.
2. Slip heat shrink and crimp ring over stripped cable.
3. Solder the socket to the center conductor.
4. Insert the socket, center conductor, and insulator into the body until the top of the socket is even with the white insulation in the body.
5. Wrap the braid around the tail of the body and crimp the ring with a 0.213" hex crimp tool (or one labeled for use with RG-58 cable).
6. Use heat shrink to cover crimp.

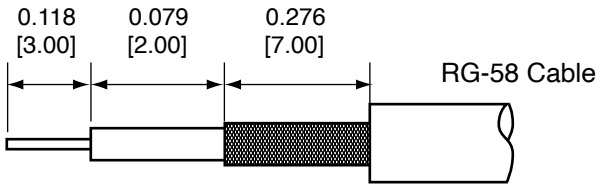

RECOMMENDED CABLE STRIPPING DIMENSIONS

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ALL DIMENSIONS ARE IN INCHES [mm].
2. DIMENSIONS APPLY AFTER FINISHING.
3. MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE.
4. SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM.

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.

MATERIAL:

FINISH:

TOLERANCES:
.020 [0.50]-.200 [5.00]= ±.008 [0.20]
.200 [5.00]-1.200 [30.00]= ±.016 [0.40]
1.20 [30.0]-4.75 [120.0]= ±.024 [0.60]
4.75 [120.0]-12.40 [315.0]= ±.040 [1.0]

PROJECTION:

ANGLES: ±1°

DRAWN: B.MURPHY DT: 2-JUL-12

ENGR: S.HOGAN DT: 2-JUL-12

TITLE:

RP-SMA MALE CABLE END CRIMP FOR RG-58 CABLE

SIZE	DWG. NO.	REV
A	CONREVSMA007-R58	B

SCALE: 2:1 | DO NOT SCALE DRAWING | SHEET 1 OF 1

©2023 TE Connectivity. All Rights Reserved.

LDCFDLT_A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-962915-1 3430B2F51RTDF 3631B101LL TE50BR39J 2310537-1 2380312-2 936348-1 CPF0402B37K4E1 RH73H2A40MKTN ROX05SJ18R SBCHE64R7K 2834055-1 1-794222-0 141991-2 SBCHE154R7K SMW73R0JT U5254-000005-030PA 1969656-1 3-1393225-0 650075-000 2377783-2 917696-1 2005330-1 1393431-1 1743455-2 175977-2 2-292161-3 CRGCQ2010J3K3 MPT100C18RF 1903112-2