CONSMA013.031-G ✔ ACTIVE

TE Internal #: L9000274-01

SMA RF Interface, Plug, 50 ohm, Threaded, 0 – 18 GHz Operating Frequency, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F]

View on TE.com >

Connectors > RF Connectors > Coax Connectors



RF Interface: **SMA**

RF Connector Style: **Plug**

Impedance: **50 Ω**

RF Connector Coupling Mechanism: **Threaded**

Operating Frequency: **0 – 18 GHz**

Features

Product Type Features

Connector Product Type	Connector Assembly
RF Interface	SMA
RF Connector Style	Plug
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Edge
Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω

Body Features

Cable Connector Orientation	Straight
Body Material	Brass
Body Material Finish	Plated
Body Plating Material	Gold

Contact Features

RF Connector Center Contact Plating Material	Gold

RF Connector Center Contact Material	Brass

Termination Features

Termination Method to Wire & Cable	Solder

Mechanical Attachment

RF Connector Coupling Mechanism	Threaded
Connector Mounting Type	Board Mount
RF Contact Captivation Method	Mechanical
Detent	Without

Usage Conditions

Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]

Operation/Application

Circuit Application	Signal
Operating Frequency	0 – 18 GHz

Packaging Features

Packaging Quantity	100
Packaging Method	Tray

Other

Dielectric Material	PTFE

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these

limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # 2480662-1
SMA F St BHD to Open Semi-rigid.047 50mm



TE Part # CONSMA001-SMD
SMA Jack 50 Ohm PCB Surface Mount



TE Part # CONSMA001-SMD-G
SMA Jack 50 Ohm PCB Surface Mount



TE Part # CONSMA001-SMD-G-T
SMA Jack 50 Ohm PCB Surface Mount



TE Part # CONSMA002
SMA RA Jack 50 Ohm PCB Through Hole



TE Part # CONSMA002-G
SMA Jack 50 Ohm PCB Through Hole



TE Part # CONSMA002-L
SMA Jack 50 Ohm PCB Through Hole



TE Part # CONSMA002-SMD
SMA Jack 50 Ohm PCB Surface Mount



TE Part # CONSMA002-SMD-G-T
SMA Jack 50 Ohm PCB Surface Mount



TE Part # L9000261-01
SMA Jack 50 Ohm .031 PCB Edge Mount



TE Part # L9000262-01
SMA Jack 50 Ohm .031 PCB Edge Mount



TE Part # L9000263-01
SMA Jack 50 Ohm .031 PCB Edge Mount



TE Part # L9000264-01
SMA Jack 50 Ohm .031 PCB Edge Mount



TE Part # L9000266-01
SMA Jack 50 Ohm .062 PCB Edge Mount



TE Part # L9000267-01
SMA Jack 50 Ohm .062 PCB Edge Mount gold



TE Part # L9000268-01
SMA Jack 50 Ohm .062 PCB Edge Mount



TE Part # L9000269-01
SMA Jack 50 Ohm .062 PCB Edge Mount



TE Part # CONSMA005
SMA Jack 50 Ohm Cable Crimp



TE Part # CONSMA005-R178
SMA Jack 50 Ohm Cable Crimp



TE Part # CONSMA005-R58
SMA Jack 50 Ohm Cable Crimp


Customers Also Bought



TE Part #980286-000
Heat Shrink Boots: Poly Mold, Lipped



TE Part #2071567-1
ECK150HAAPA

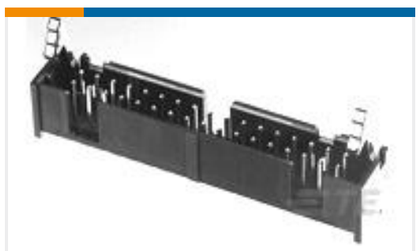

TE Part #1761608-9
IDC LOW PRO HDR 26P VERT SHT LAT BLK



TE Part #1761842-1
CONNECTOR ASSY, 60 DUAL POSITI



TE Part #5-794630-2
22P MICRO MNL ASSY,VRT,HDR,LF



TE Part #2176430-6
MPT35 R68 5%



TE Part #CONMCX001-SMD
MCX Jack 50 Ohm PCB Surface Mount



TE Part #L9000276-01
SMA Plug 50 Ohm .062 PCB Edge Mount



TE Part #L9000277-01
SMA Jack 50 Ohm .031 PCB Edge Mount

Documents

CAD Files

3D PDF

3D

Customer View Model
ENG_CVM_CVM_L9000274-01_A.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_L9000274-01_A.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_L9000274-01_A.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

SMA MALE EDGE MOUNT FOR 0.031INCH BOARD

English

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Linx Technologies:

ANT-2.4-PW-LPN ANT-490-CW-QW-SMA ANT-8/9-PW-LPN ANT-8/9-SPNF1 ANT-DB1-WRT-UFL-100
ANT-MAG-RPSF-NM-1 ANT-W63RPC1-MHF4-100 ANT-8/9-SPNF2 ANT-GNSSCP-TH25L1
ANT-MAG-RPSF-SMAM-1 ANT-W63-MSA-TH1 2445750-1 ANT-450-RHS-SMA ANT-5GW-FPC-LH100UF
ANT-GNL1-NSP AEK-2.4-MSA-TH1 ANT-B8-PW-QW-UFL CSA-RPSM-216-RSFB ANT-W63-FPC-SAH50UF
ANT-W63-WRT-UFL ANT-W63-WRT-SMA ANT-B8-PW-QW ANT-490-PW-QW ANT-W63-FPC-UFL-100
ANT-W63-MON-SMA ANT-5GW-SPNF1 ANT-868-ID-2000-SMA ANT-GNFPC-SHL1100M4
ANT-MAG-SMAF-RPSM-1 CSJ-SGFB-200-MHF4