
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.


ALL DIMENSIONS ARE REFERENCE ONLY

PART NO. **RFT-1212-C2**

REV	DESCRIPTION	DWN	DATE	APPROVED
–	ENGINEERING RELEASE	CZS	10/31/97	JDMc

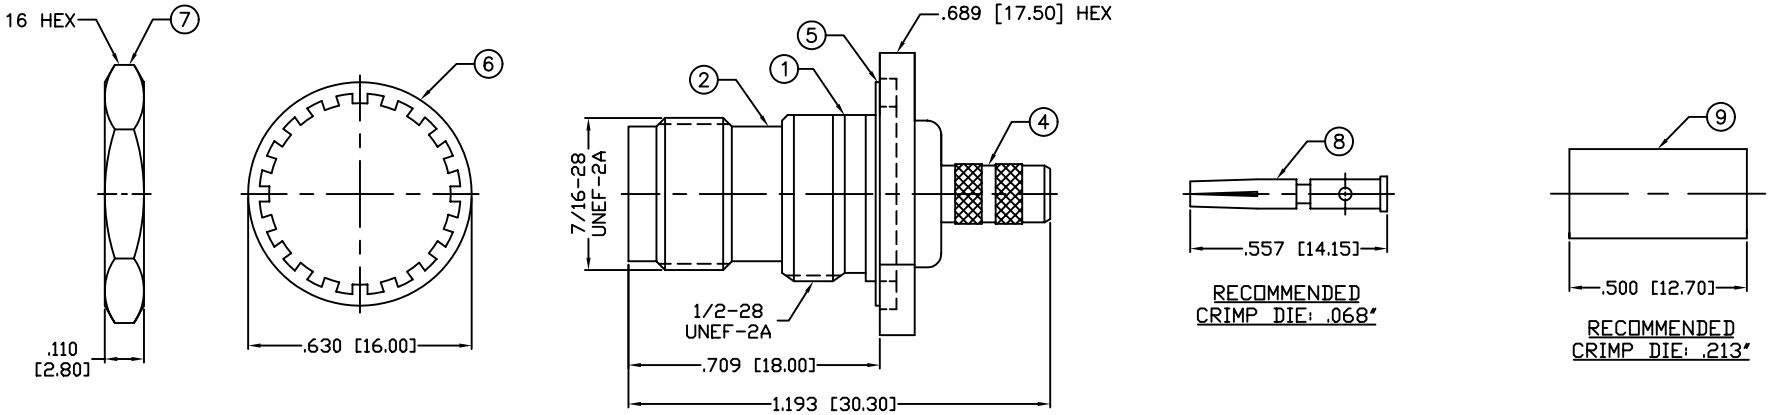

MAX. PANEL THICKNESS= .138 [3.50]

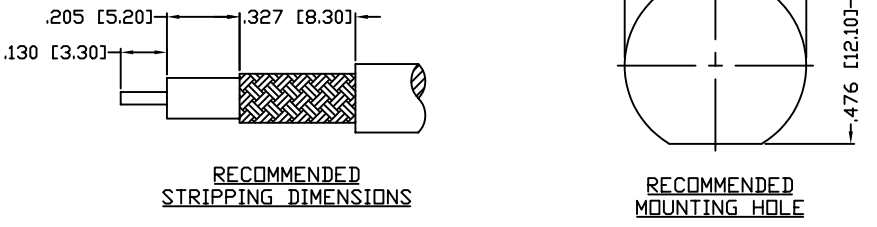

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0–7 GHz
WORKING VOLTAGE: 500 V rms @ sea level
INSULATION RESISTANCE: 5k M ohms min.
TEMPERATURE RANGE: –65°C TO +85°C
FOR TIMES LMR–200, ALPHA 9848 & MSI–22

#	DESCRIPTION	QTY	MATERIAL	FINISH
1	PRESS BODY	1	BRASS	NICKEL, 100µ"
2	BODY	1	BRASS	NICKEL, 100µ"
3	INSULATOR	1	DELRIN	---
4	FERRULE STUD	1	BRASS	NICKEL, 100µ"
5	GASKET	1	RUBBER	---
6	LOCK WASHER	1	BRASS	NICKEL, 100µ"
7	HEX NUT	1	BRASS	NICKEL, 100µ"
8	CONTACT	1	PHOS BRONZE	GOLD, 3µ"
9	FERRULE	1	BRASS	NICKEL, 100µ"
10				
11				
12				
13				
14				

008974

APPROVALS	DATE
DRAWN C. ZUNIGA	01/02/07
CHECKED	
ORJ DRAWN C. ZUNIGA	01/02/07

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX.
3. CHAMFER 1ST & LAST THREADS 45°
4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS	DIAMETER
.XXX±.003 [.08]	.XXX±.001 [.03]
.XX±.005 [.13]	.XX±.003 [.08]

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD
SAN DIEGO,CA 92126
(858) 549-6340
(858) 549-6345 FAX

TNC JACK, CRIMP

BULKHEAD

SIZE	CABLE GROUP	DWG NO.	REV
A	C2	RFT-1212-C2	–

SCALE:	CAD FILE	SHEET
NTS	OUTLINE	1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

RF Industries:

RFU-600-5 RFU-600-6C1 RFU-601-1X RFW-12404-30-5 RFU-602-2 RFW-5573-16 RQN-1300-SR2 RFB-1137 RFU-632 RQA-5010-SR2LP RF123-7002-B RFT-1239 RFU-505 RSA-3252-C RFB-1124-1X RFD-1601-HPL RFD-225M-SR2 RFN-1007-2SX RSA-3402 RFD-1610DS-H4 RFU-507-SI RFU-601-3 RFU-633 RFW-5573-7 RSA-3478 RF123-7052-1B RFW-5573-60 COMP-TM-400PL RFU-500 RQA-5000-SR2LP