



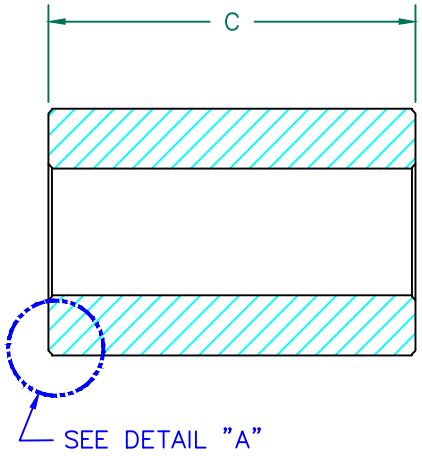


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	130 Ω	245 Ω	360 Ω
Minimum	- Ω	196 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

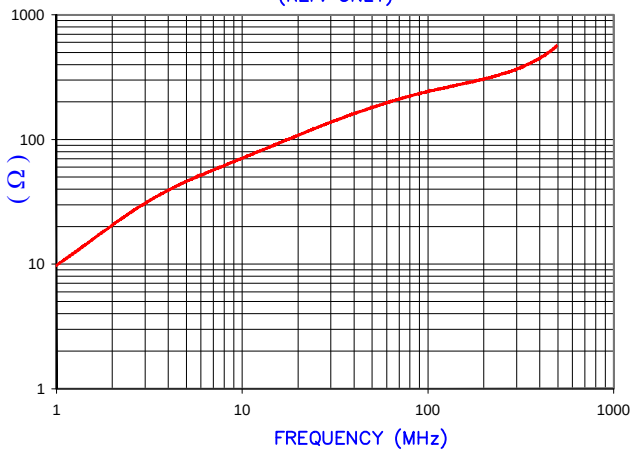

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture



DETAIL "A"
CHAMFER
SCALE=5:1

FERRITE CORE DIMENSIONS (SPEC): mm/inches


A	17.07 [.672]		+0.25 [.010] −0.36 [.014]
B	8.76 [.345]	±	0.20 [.008]
C	25.40 [1.000]	±	0.76 [.030]

WEIGHT/1000 21.15 kgs [46.62 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. PARTS MUST BE TUMBLED, BURNISHED OR DEBURRED TO REMOVE ALL BURRS AND SHARP EDGES.
2. COSMETIC SPECIFICATION REFER TO WI-QA-038.

SCALE DRAWING 1:1

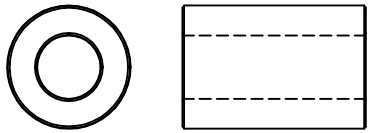

28B0672-000

RoHS

REV	DESCRIPTION	DATE	INT
J	UPDATE THE LOGO	05/13/15	QIU
H	UPDATE TEMPALTE	12/25/09	Jcai
G	CHANGE NOTE 1, UPDATE PRINT FORMAT UPDATE Z SPECS ADD CURVE	03/03/03	JRK
F	UPDATE FORMAT ADD KGS TO WEIGHT UPDATE Z SPECS	05/02/02	JRK

DIMENSIONS ARE IN mm [INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.

Laird

PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
28B0672-000	J	FERRITE CNZ CORE	DJB

DATE:	SCALE:	MATERIAL:
05/28/92	2 : 1	FERRITE

CAD #	TOOL #
28B0672-000-J	B0672

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Laird:

CMX1211Z601B-10 LFB095051-000 TRA6927M3PBN-001 NS1050HA 0097064502 28B0734-000 DA1206D301R-10 DM3312X101R-10 LI0603G221R-10 MI1210K600R-10 28B0500-100 HF0402B102R-10 MP1040-100 TYS30126R8M-10 28A2005-0A2 MGV201610R68M-10 MI0805M221R-10 28A0392-0A2 28A1507-0A2 29220104 HI1206N680R-10 24296254 28R1141-010 A15754-04 CM3440Z171R-10 CMX1211Z680B-10 HI0805O121R-10 0097061102 CC1812C513R-10 LI0603B201R-10