
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO. **RFN-1054-AV**

REV	DESCRIPTION	DWN	DATE	APPROVED
–	ENGINEERING RELEASE	JDM	12/11/08	R. RICE

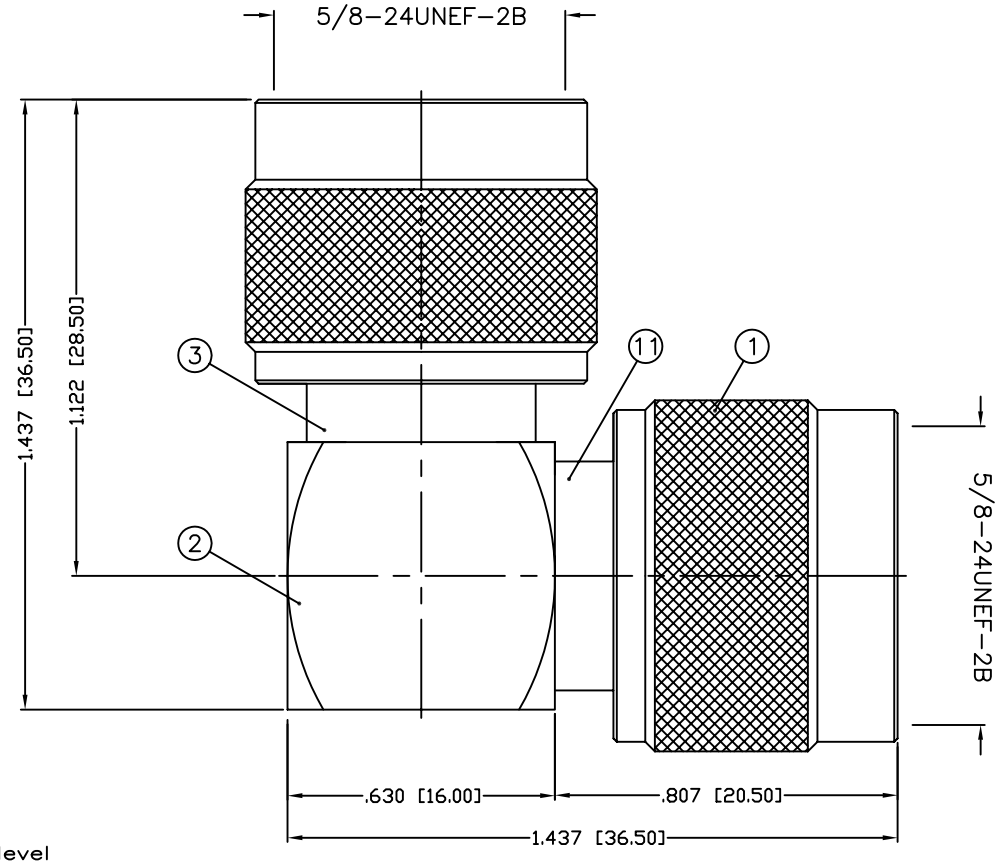

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0–11 GHz
INSERTION LOSS: .06 dB Max. X $\sqrt{fGHz}$
WORKING VOLTAGE: 1k V rms @ sea level
TEMPERATURE RANGE: –65°C TO 85°C
INSULATION RESISTANCE: 5k M Ohms min.

#	DESCRIPTION	QTY	MATERIAL	FINISH
1	SHELL	2	BRASS	NICKEL,100μ"
2	BODY	1	BRASS	NICKEL,100μ"
3	BODY	1	BRASS	NICKEL,100μ"
4	INSULATOR	1	PTFE	---
5	GROUND RING	2	BRASS	NICKEL,100μ"
6	GASKET	2	SILICONE	---
7	RETAINING RING	2	SST. 304	---
8	PIN	1	BRASS	GOLD, 3μ"
9	INSULATOR	1	PTFE	---
10	PIN	1	BRASS	GOLD, 3μ"
11	BODY	1	BRASS	NICKEL,100μ"
12	PRESS CAP	1	BRASS	NICKEL,100μ"
13				
14				

008974

APPROVALS	DATE
DRAWN JD McREYNOLDS	12/11/08
CHECKED	
ORJ DRAWN JDM	12/11/08

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX.
3. CHAMFER 1ST & LAST THREADS 45°
4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS	DIAMETER
.XXX±.003 [.08]	.XXX±.001 [.03]
.XX±.005 [.13]	.XX±.003 [.08]

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD
SAN DIEGO,CA 92126
(858) 549–6340
(858) 549–6345 FAX

N PLUG TO N PLUG RIGHT ANGLE ADAPTOR

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFN–1054–AV	–

SCALE: NTS | CAD FILE OUTLINE | SHEET 1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

RF Industries:

RQA-5010-SR2LP RF123-7000-B RFB-1152 RFU-506 RFW-5147-96 RFW-3317-16 RQA-5000-HPL RQA-5000-SR2LP RFU-600-6C1 CBL-CU240-2000 RFD-1644-2SR2 RFB-1101-1EN RFU-505 RF123-7003-X RFD-1650-2 RFT-1212-B RF123-7050-1B RFU-500 RQN-1300-SR2 RFU-507-SI RQA-5010-8X RSB-301-179 RFU-601-1X RFT-1239 RFU-520-1E RFN-1013-1 RFN-1028-SI2 RFN-1027DS-H8 RP-1216-C2 RFB-1106-9