


Mar.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.


NO.	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	NO.	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

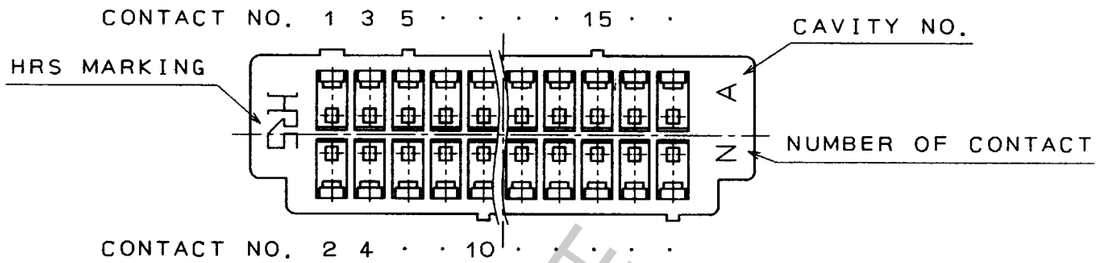

PARTS NO.	HRS NO.	CONTACTS	A	B	C
DF13-10DS-1.25C	CL536-0550-2	10	10.4	8.0	5.0
DF13-20DS-1.25C	CL536-0555-6	20	16.65	14.25	11.25
DF13-30DS-1.25C	CL536-0560-6	30	22.9	20.5	17.5
DF13-40DS-1.25C	CL536-0565-0	40	29.15	26.75	23.75

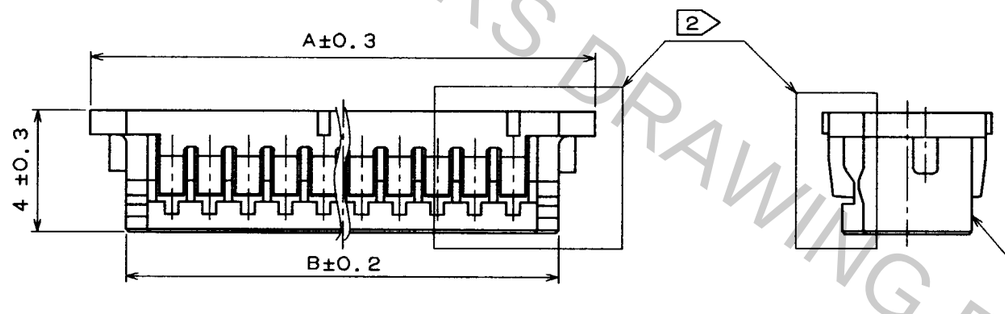

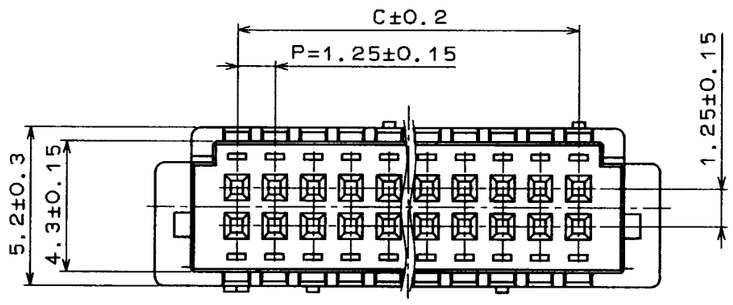

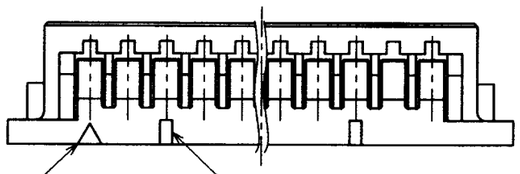

2 FIG. A

HRS DRAWING FOR REFERENCE

NOTES 1 100 CONNECTORS ARE IN ONE PACK
2 LANCE CONFIGURATION, 30 AND 40 CONTACTS SHALL BE FIG. A.

NO.	MATERIAL	FINISH, REMARKS
1	POLYAMIDE	(BEIGE) UL94V-0

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	H. IGARASHI 95 3.14	95. 3. 15	M. Yokamura 95. 3. 16	H. Yamano 95. 3. 16	

SCALE	UNITS	DRAWING NO.	PART NO.
5 : 1	mm	EDC3-160109-02	DF13-*DS-1.25C

HRS HIROSE ELECTRIC CO., LTD.

CODE NO. CODE NO. SHALL BE IN ACCORDANCE WITH TABLE

1/1

FORM No. 229

TO

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

DF40C-50DP-0.4V(51) ZE05H-12DP-2H FH35C-19S-0.3SHW(50) ZE05-24DP-2H DF59M-2224PCF DF22A-1416SCFA FH41-30S-0.5SH(05) FX18-80S-0.8SH RM12BRD-2PH(81) ZE064W-8DP-HU/R(A) DF19A-3032SCFA(41) DF57AH-5S-1.2C GT8E-6S-HU BM29B0.6-4DS/2-0.35V(51) DF36A-25P-SHL FX18-60S-0.8SH FX8-120S-SV(22) HDE-CTH(10) RM15TP-2PA(81) DF62C-4S-2.2C DF65-4P-1.7V(21) DF33C-4S-3.3C DF52-4P-0.8C FH41-50S-0.5SH(28) RM15TRH-10PH(81) ZH05-20DP-HU(B) FH72-21S-0.3SHW ZE05H-4P-2V(A) DF11-16DP-2DSA(24) DF17(3.0)-40DS-0.5V(57)