PL 7 RV

Art. No. 4475 (schwarz / *black*) – 4 Ω
Art. No. 4476 (schwarz / *black*) – 8 Ω

7 cm (2,5“) Einbaulautsprecher mit Gewindering am Kunststoffgehäuse zur einfachen Montage in einer kreisrunden Öffnung ohne zusätzliche Schrauben. Hoher Wirkungsgrad im sprachrelevanten Frequenzbereich. Inklusive 60 cm Kabel.


Anwendungsmöglichkeiten
• Armaturenbretter, Tür- oder andere Verkleidungen in Fahrzeugen


Zubehör: Distanzring DR PL 7 RV (Art. No. 4488)


7 cm (2.5”) flush-mounted speaker *with a threaded mounting ring at the plastic housing for easy installation in round openings without additional screws. High efficiency at frequencies relevant for speech reproduction. Including 60 cm cable.*


Typical applications
• *Dashboards, door panels or other panels in vehicles*

Accessories: *Spacer ring DR PL 7 RV (Art. No. 4488)*

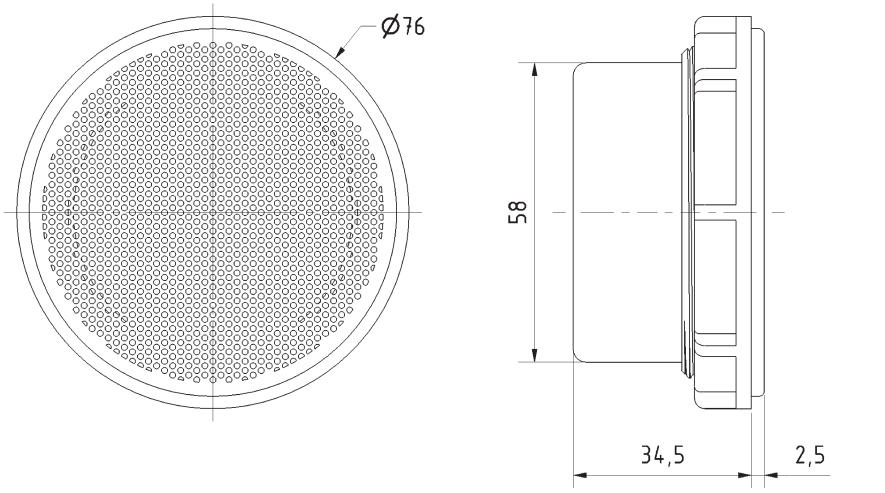

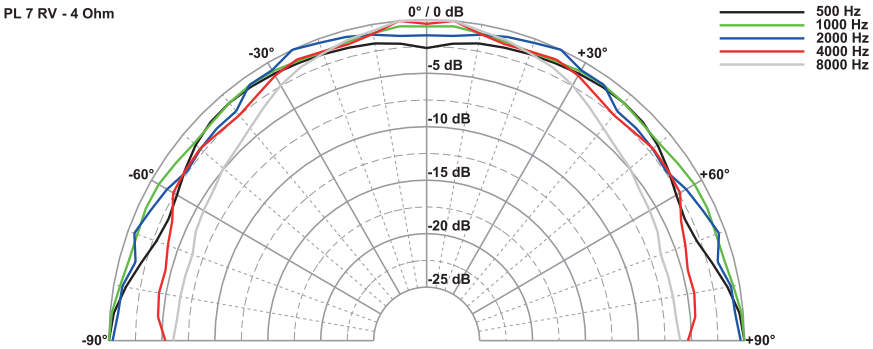

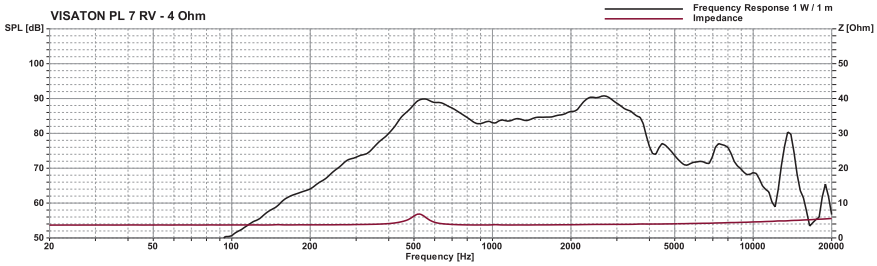

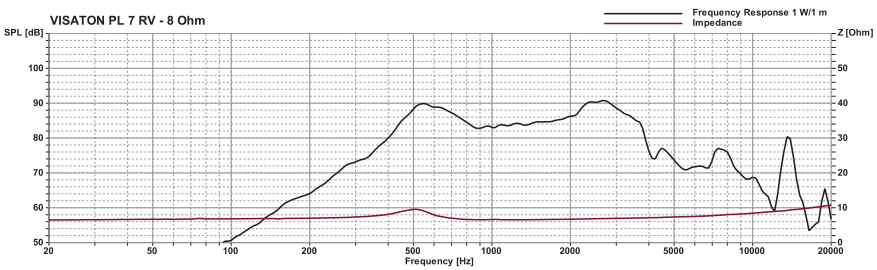







Art. No. 4488

4x IP CAD

Technische Daten / *Technical Data*

Nennbelastbarkeit *Rated power*	10 W
Impedanz *Impedance*	4 Ω / 8 Ω
Übertragungsbereich (–10 dB) *Frequency response (–10 dB)*	400–5000 Hz
Mittlerer Schalldruckpegel *Mean sound pressure level*	88 dB (1 W/1 m)
Resonanzfrequenz *Resonant*	550 Hz
Einbauöffnung *Cutout diameter*	64,5 mm
max. Wandstärke *max. thicknss panel*	7,5 mm
Kabellänge *Length of cable*	0,6 m
Gewicht netto *Net weight*	0,160 kg
Farben *Colours*	schwarz *black*

© VISATON GmbH & Co. KG • Ohligser Straße 29-31 • D-42781 Haan • Tel.: 0 21 29 / 5 52 - 0 • Fax: 0 21 29 / 5 52 - 10 • e-mail: visaton@visaton.com 2023

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

VISATON:

2017 4993 50162 8005 FR 10 - 8 OHM 2949 2148 2849 2918 4622 4630 50168 1004 2981 50154 5940 8051 K 36 WP - 8 OHM 2826 FR 8 WP BLACK 8 OHM 2007 5231 FR 7.12 - 8 OHM 2008 2909 K 50 FLS 8, OHM 2015 2127 31065 8006