

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – By – TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST
HB	–


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	CHANGE LOGO&ADD LINE IDENTIFICATION ECO-12-003498& ADD CQC SYMBOL P-11-003756	07Nov2012	YS.H	BH.Y

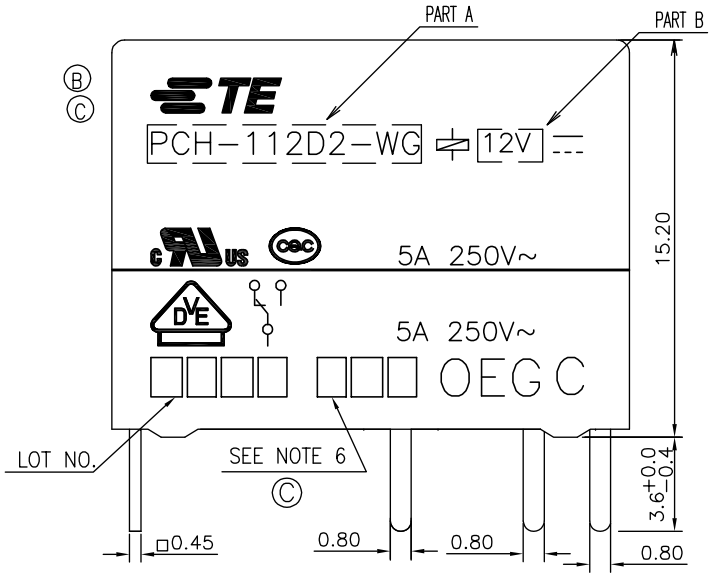

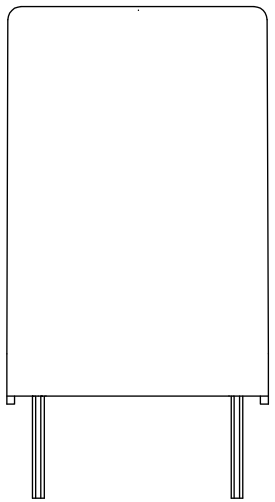

DRILLING DIAGRAM (BOTTOM VIEW)

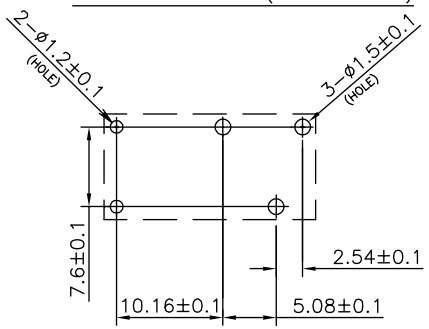


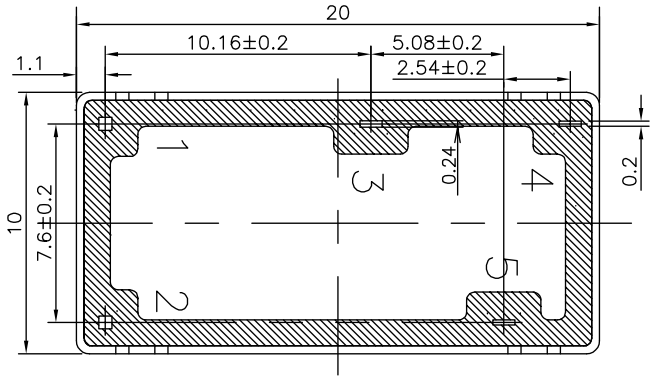


Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 – 2.99mm	±0.2mm
3mm min.	±0.3mm

CONNECTION DIAGRAM (BOTTOM VIEW)



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	KY.DU –
CHK	N.Funayama –
APVD	C.H.HSU –
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	–

TE Connectivity

NAME – PCH-D2(H)-WG CUSTOMER DRWING –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C- 1721766	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 2 | REV C

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST
HB	–

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

TE PART NO	TE TYPE NAME	PART B	PART A	PACKAGE SPEC	TYPE
1-1721766-4	PCH-148D2H-WG	48V	PCH-148D2H-WG	107-79019(TRAY)	n
1-1721766-3	PCH-124D2H-WG	24V	PCH-124D2H-WG	107-79019(TRAY)	m
1-1721766-2	PCH-112D2H-WG	12V	PCH-112D2H-WG	107-79019(TRAY)	l
1-1721766-1	PCH-109D2H-WG	9V	PCH-109D2H-WG	107-79019(TRAY)	k
1-1721766-0	PCH-106D2H-WG	6V	PCH-106D2H-WG	107-79019(TRAY)	j
1721766-9	PCH-105D2H-WG	5V	PCH-105D2H-WG	107-79019(TRAY)	i
1721766-8	PCH-103D2H-WG	3V	PCH-103D2H-WG	107-79019(TRAY)	h
1721766-7	PCH-148D2-WG	48V	PCH-148D2-WG	107-79019(TRAY)	g
1721766-6	PCH-124D2-WG	24V	PCH-124D2-WG	107-79019(TRAY)	f
1721766-5	PCH-112D2-WG	12V	PCH-112D2-WG	107-79019(TRAY)	e
1721766-4	PCH-109D2-WG	9V	PCH-109D2-WG	107-79019(TRAY)	d
1721766-3	PCH-106D2-WG	6V	PCH-106D2-WG	107-79019(TRAY)	c
1721766-2	PCH-105D2-WG	5V	PCH-105D2-WG	107-79019(TRAY)	b
1721766-1	PCH-103D2-WG	3V	PCH-103D2-WG	107-79019(TRAY)	a

RELAY TYPE

ITEM	DESCRIPTION	MATERIAL	TREATMENT	INCOMBUSTIBILITY
17	UV SEAL	UV RESIN		
16	SEAL	EPOXY RESIN		
15	COIL WIRE	UEW		
14	COIL TERMINAL	HCP WIRE	SOLDER DIP	
13	STATIONARY CONTACT	Ag ALLOY		
12	MOVBLE CONTACT	Ag ALLOY		
11	HINGE SPRING	Cu ALLOY		
10	NC TERMINAL	Cu ALLOY	SOLDER DIP	
9	NC TERMINAL	Cu ALLOY	SOLDER DIP	
8	MOVABLE SPRING	Cu ALLOY	SOLDER DIP	
7	CARD	LCP		UL94 V-0
6	CASE	PET		UL94 V-0
5	BOBBIN	PA NYLON		UL94 HB
4	BASE	PET		UL94 V-0
3	CORE	STEEL	Ni PLATED	
2	ARMATURE	STEEL	Ni PLATED	
1	YOKE	STEEL	Ni PLATED	

NOTES:

1.LAST SUFFIX
NON : WASHABLE TYPE

Ⓑ 2.LOT NO SYSTEM AS FOLLOWING:

□□□□
WEEK
YEAR

© 3.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

© 4.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.
+0.5mm FOR LENGTH.

© 5.MARKING FROM INK TO LASER.

© 6.ADD LOT NO. SYSTEM AS FOLLOWING;

1 1 A
I II III

I, DIGITS FOR DAY OF THE WEEK
1...MONDAY IN THIS WEEK;
2...TUESDAY IN THIS WEEK;
7...SUNDAY IN THIS WEEK
II, DIGITS FOR SHIFT OF THE DAY
1...DAY SHIFT IN THIS DAY;
2...NIGHT SHIFT IN THIS DAY;
III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY, SUCH AS: A,B.....Z

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN	KY.DU –
CHK	N.Funayama –
APVD	C.H.HSU –
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	–

TE Connectivity

NAME
–
PCH-D2(H)-WG CUSTOMER DRWING
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C- 1721766	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 2 OF 2 | REV C

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-794222-0 1393431-1 936348-1 CPF0402B37K4E1 CRGCQ2010J3K3 175977-2 1903112-2 3430B2F51RTDF 3631B101LL SMW73R0JT U5254-000005-030PA 141991-2 1969656-1 MPT100C18RF ROX05SJ18R 2834055-1 650075-000 1-962915-1 2310537-1 2380312-2 RH73H2A40MKTN TE50BR39J 1743455-2 2-292161-3 3-1393225-0 SBCHE154R7K 2005330-1 2377783-2 917696-1 SBCHE64R7K