


ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE

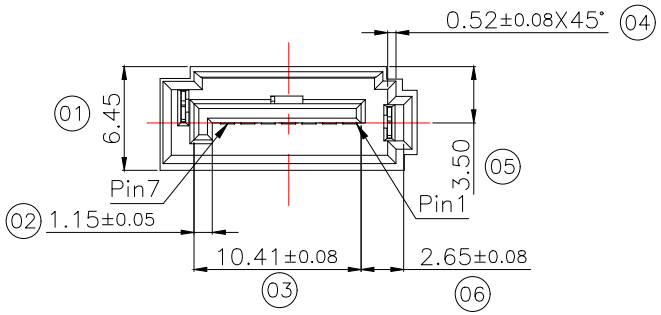


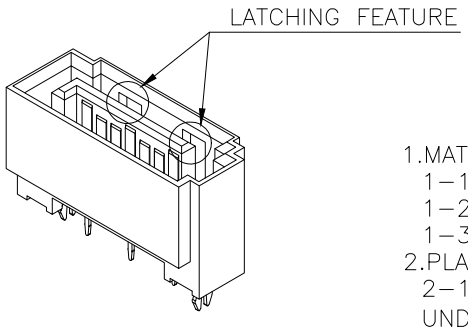


1.MATERIAL SPECIFICATION,
1−1.HOUSING:PA66;
1−2.CONTACT:BRASS C2680;
1−3.HOOK:BRASS C2680;
2.PLATING SPECIFICATION,
2−1.CONTACT:
UNDER PLATING:Ni 50u" Min PLATED OVER ALL;
CONTACT AREA: SEE TABLE;
SOLDER TAIL: MATTE TIN 100u" Min PLATED ;
2−2.HOOK: MATTE TIN 100u" Min PLATED OVER Ni 50u" Min.
3.MECHANICAL PERFORMANCE,
3−1.INSERTION FORCE:45N Max
3−2.REMOVAL FORCE:10N Min
3−3.DURABILITY:50 CYCLES
4.ELECTRICAL PERFORMANCE,
4−1.CURRENT RATING:1.5A Max
4−2.INSULATION RESISTANCE:1000 MEGAOHMS Min.
4−3.DIELECTRIC WITHSTAND VOLTAGE:500VRMS AT SEA LEVEL
5.RoHS OR HF COMPLIANT.

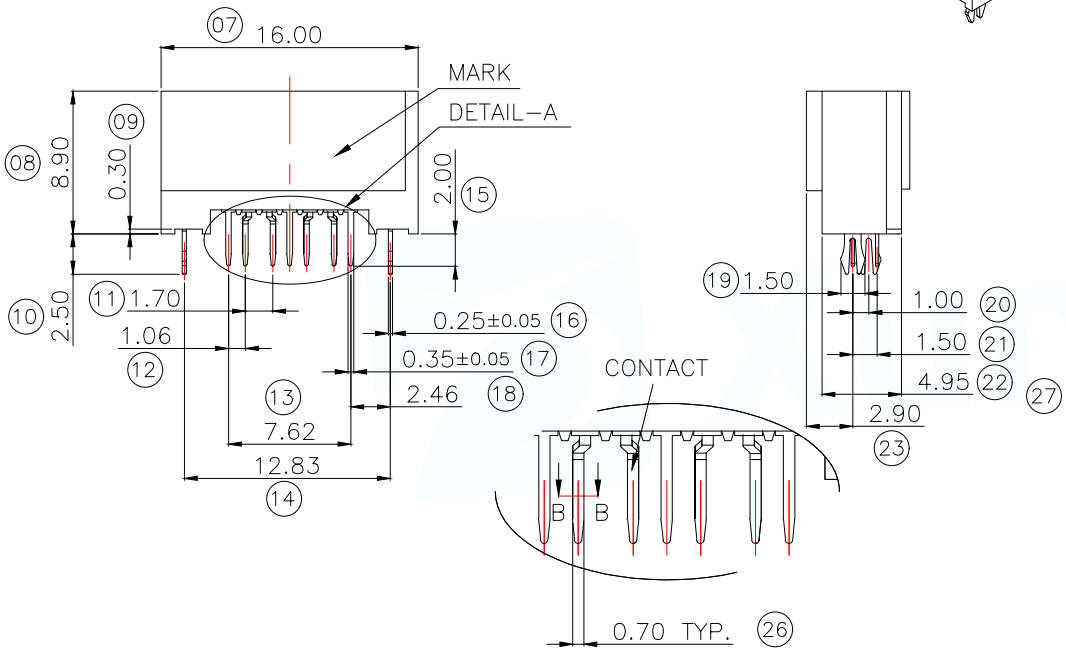


DETAIL−A
SCALE 2:1



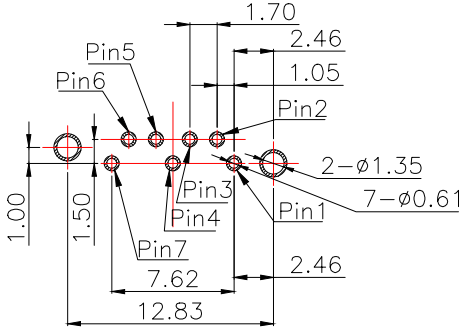

RECOMMENDED P.C.B. LAYOUT(TOP VIEW)
THICKNESS:1.6mm; TOLERANCE ±0.05mm




SECTION B−B
SCALE 5:1


MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES			TITLE: SATA 7Pin CONN 固定扣脚		
			PAR	SATA−501−M07S1BY−A	
DECIMALS:	ANGLES:		DWN		
X.±0.35	X.°±10'		CHKD		
X.X±0.30	X.X°±5'		APVD		
X.XX±0.20	X.XX°±2'	CUSTOMER COPY	SCALE N:A	UNIT:MM	
			SIZE:A4	SHEET:1F1	REV:A

ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE

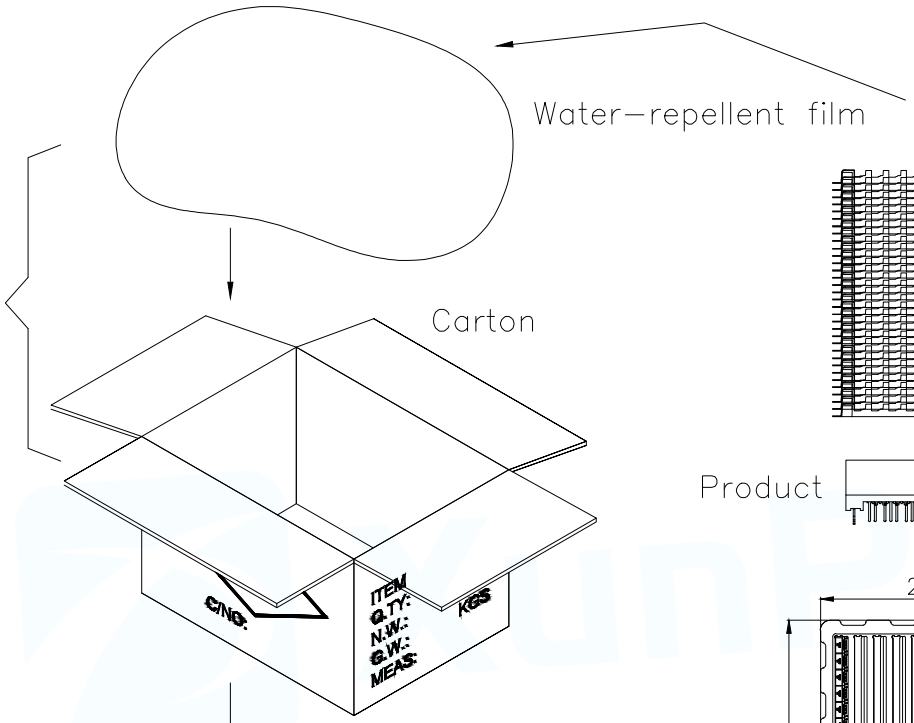


3.Put the 30 trays of products into a water-repellent film,then put all of them into a carton.

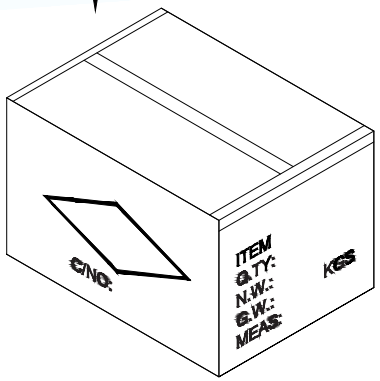


4.Packed the carton,and the seal lppks like"I"shape.


An empty tray on the top



2.Each 30 trays of products puts together,one tray over another one,like the picture shows,6300pcs products in all.

Product



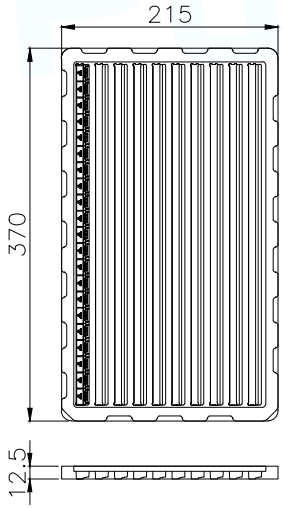

1.Put the good products which had inspected into the tray,210pcs per tray.

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE: SATA 7Pin CONN		
		PAR	SATA-501-M07S1BY-A	
DECIMALS: / ANGLES:		DWN		
X.±0.35 / X.°±10°		CHKD		
X.X±0.30 / X.X°±5°		APVD		
X.XX±0.20 / X.XX°±2°	CUSTOMER COPY	SCALE N:A	UNIT:MM	
		SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-0.5AS-5PWCR-H20 FPC-0.5FX-14PWCR-H20 FPC-0.5FX-4PWBH15 WAFER-PH2.0-2PJK
FPC-0.5AX-24PWCR-H20 FPC-1.0AX-4PWCR-H25 MU-103-ARW64 FPC-1.0HF-4PWAR-H20
WAFER-MX1.25B-8PWB WAFER-XH2.54-4PWZ-H62 FPC-0.5AX-30PWCR-H20 FPC-0.5FX-4PWCR-H20
FPC-1.0AX-14PWCR-H25 WAFER-GH1.25-6PLB WAFER-PH2.0-3PWB WAFER-PH2.0-8PLB
DC-031A-A100 TYPEC-304YDSW-ACP16 FPC-0.5FX-16PWCR-H20 FPC-0.5FX-20PWBH15
FPC-0.5HF-10PWBR-H20 PHB2.0-02-20PZZ HDMI-212L RJ45-005-014-11 SMA-KWE-323C-H13X23-LW
WAFER-PH2.0-6PWB WAFER-VH3.96-4PLB WAFER-WBM4.2-16PJK-GB FPC-0.5AL-6PB
WAFER-PH2.0-11PZZ