
PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION


REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 25489, SO	04/21/14	HM
B	CLARIFY VIEW 'A' POLARITY RECEPTACLE 'LINE' AND 'NEUTRAL',RFS.27322	04/25/19	HM



'A'



'B'

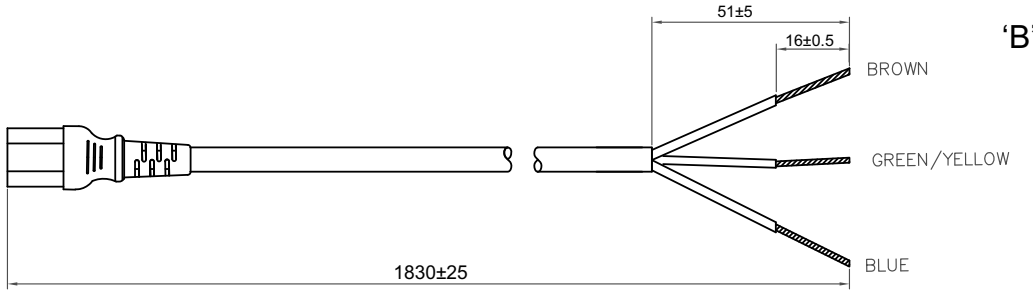

GENERAL SPECIFICATIONS:

RATING:	10A / 250V AC
CABLE TYPE / SIZE:	SVT, # 18 AWG, 3 CONDUCTOR SHIELDED/ EUROPEAN COLOR CODED CONDUCTORS
TEMPERATURE RATING:	75° C MINIMUM
CONDUCTOR COLORS:	BLUE / BROWN / GREEN-YELLOW
CABLE JACKET COLOR:	BLACK
OVERALL LENGTH:	1830 ± 25 mm
CABLE OUTER DIAMETER:	6.3 ± 0.1 mm
END 'A' PLUG:	IEC-320 / C13
END 'B' :	SEE TERMINATION TABLE
APPROVALS PLUG:	UL, CSA or cUL
APPROVALS CABLE:	UL, CSA or cUL



PACKING:

BULK PACKED, BUNDLES OF 25.
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

CONDUCTOR TERMINATION TABLE:

Wire	Color	ROJ ± 5 mm	RIJ ± 0.5 mm	Termination
Neutral	Bue	51	16	Stripped
Line	Brown	51	16	Stripped
Ground	Green-Yellow	51	16	Stripped

NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS AND/ OR FILE NUMBERS.
2. SHIELD IS CONNECTED TO GROUND PIN ON IEC 320/C13.

OR

RELEASED
By N.Frost at 3:33 pm, Apr 25, 2019

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES

TABULATION BLOCK

TOLERANCES:
DECIMALS .xx +/- 0.1 .xxx +/- .005 ANGULAR +/- 1°
MILLIMETERS .xx +/- 0.3 .xxx +/- .013 ANGULAR +/- 1°

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

DWG TITLE: NON-DETACHABLE CORDSET

INIT.BY: SO	DATE: 04/21/14		
DRAWN: NF	DATE: 04/21/14	FSCN No.: G, CC	SIZE A
APRVD: HM	DATE: 04/21/14	SCALE: NONE	

REV. B

PART NO: **7011876F000-CEE(R)**

SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

GlobTek:

6104112M703A(R)