



RoHS

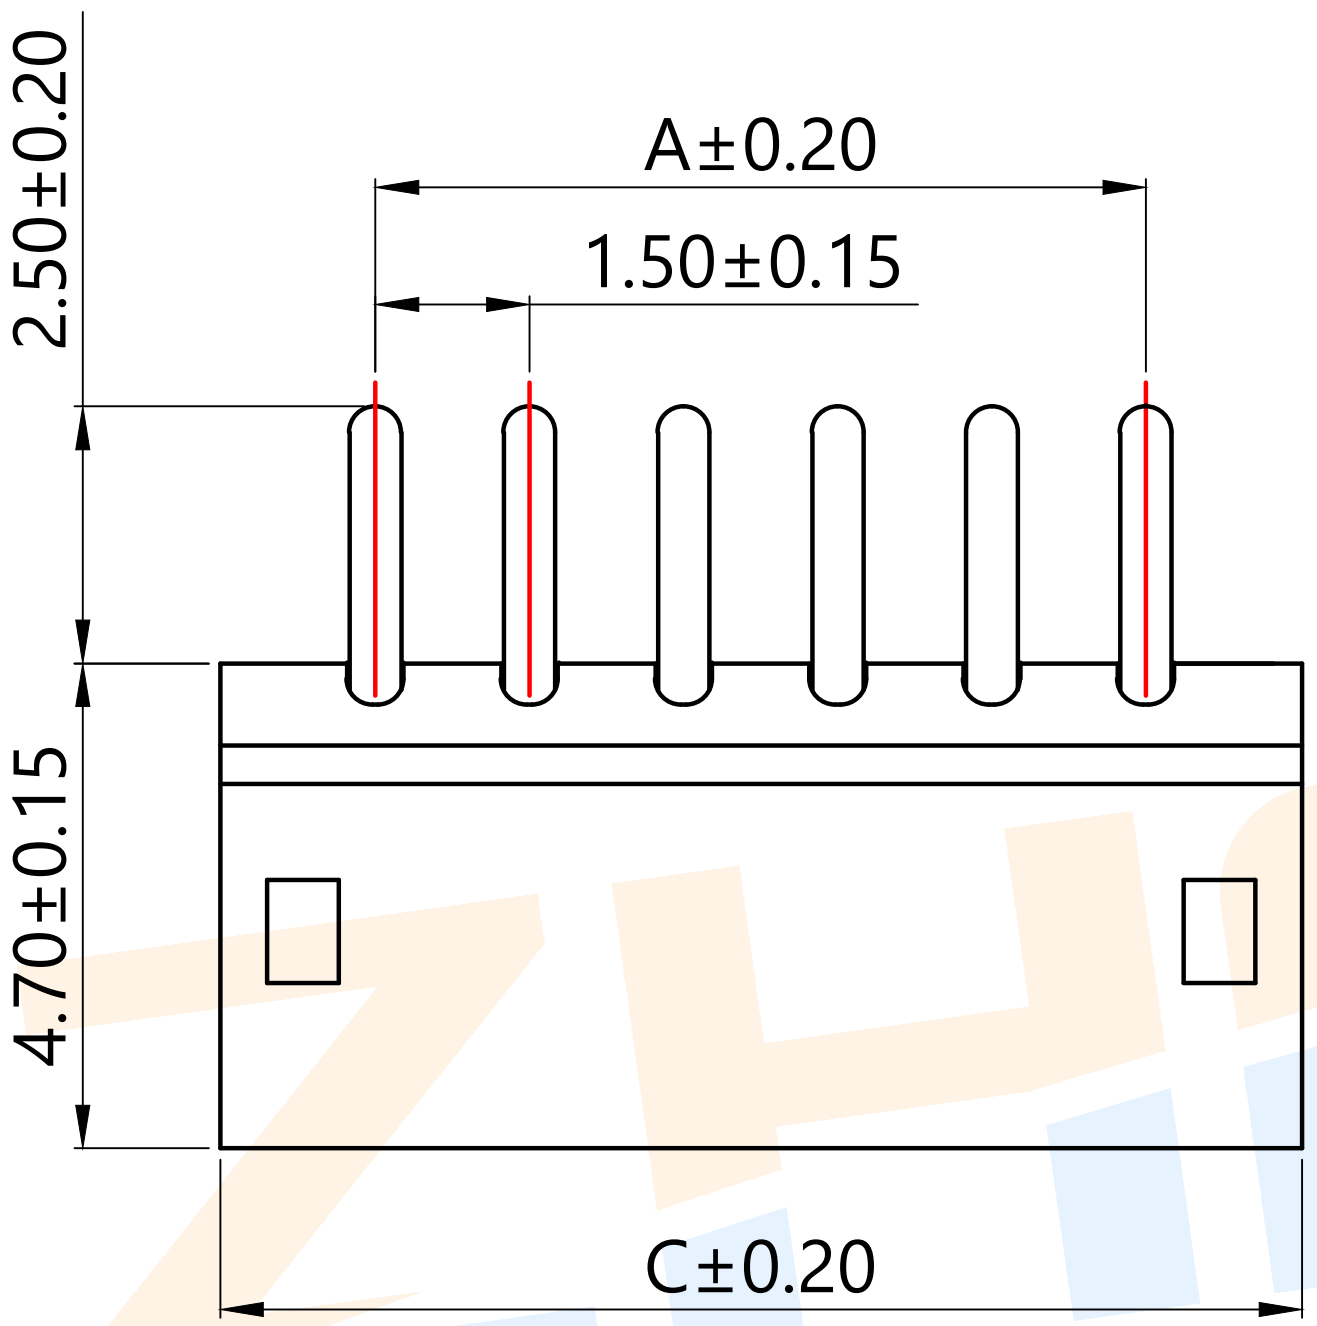

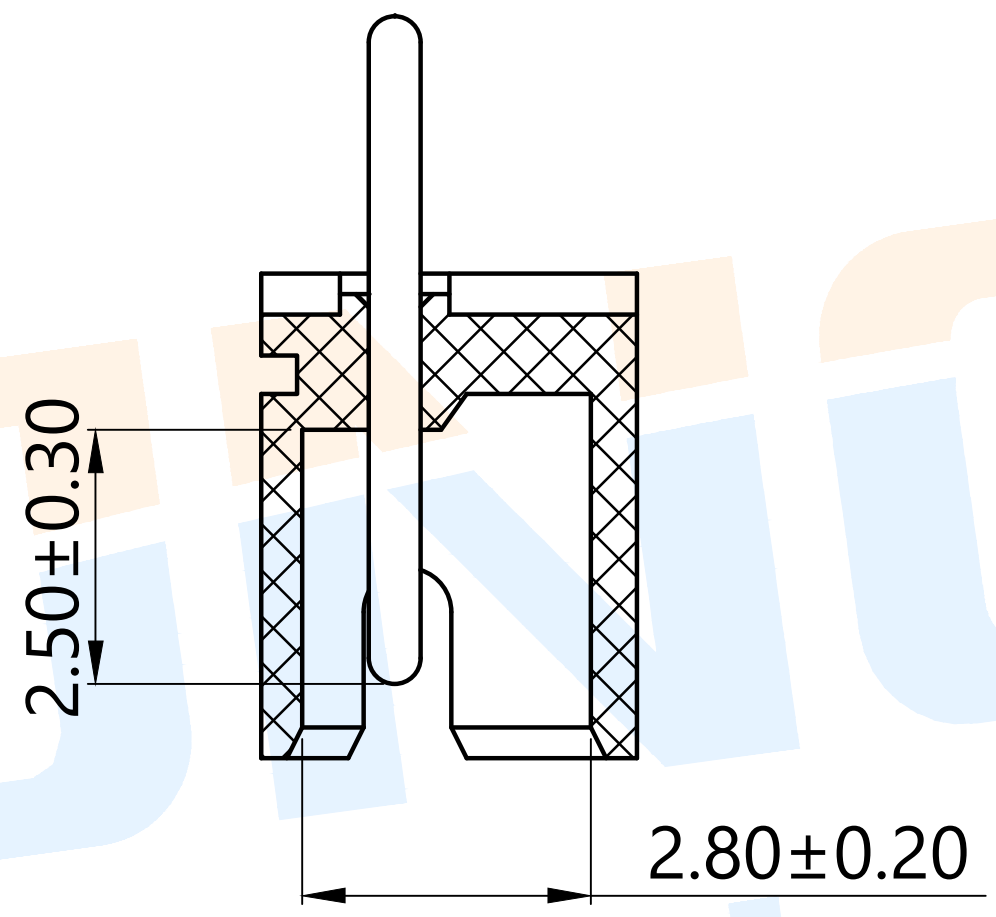

Model No.	Pin	A	B	C
WAFER–ZH1.5–2PZZ–W6	2	1.50	3.60	4.50
WAFER–ZH1.5–3PZZ–W6	3	3.00	5.10	6.00
WAFER–ZH1.5–4PZZ–W6	4	4.50	6.60	7.50
WAFER–ZH1.5–5PZZ–W6	5	6.00	8.10	9.00
WAFER–ZH1.5–6PZZ–W6	6	7.50	9.60	10.50
WAFER–ZH1.5–7PZZ–W6	7	9.00	11.10	12.00
WAFER–ZH1.5–8PZZ–W6	8	10.50	12.60	13.50
WAFER–ZH1.5–9PZZ–W6	9	12.00	14.10	15.00
WAFER–ZH1.5–10PZZ–W6	10	13.50	15.60	16.50
WAFER–ZH1.5–11PZZ–W6	11	15.00	17.10	18.00
WAFER–ZH1.5–12PZZ–W6	12	16.50	18.60	19.50
WAFER–ZH1.5–13PZZ–W6	13	18.00	20.10	21.00
WAFER–ZH1.5–14PZZ–W6	14	19.50	21.60	22.50
WAFER–ZH1.5–15PZZ–W6	15	21.00	23.10	24.00
WAFER–ZH1.5–16PZZ–W6	16	22.50	24.60	25.50
WAFER–ZH1.5–17PZZ–W6	17	24.00	26.10	27.00
WAFER–ZH1.5–18PZZ–W6	18	25.50	27.60	28.50
WAFER–ZH1.5–19PZZ–W6	19	27.00	29.10	30.00
WAFER–ZH1.5–20PZZ–W6	20	28.50	30.60	31.50

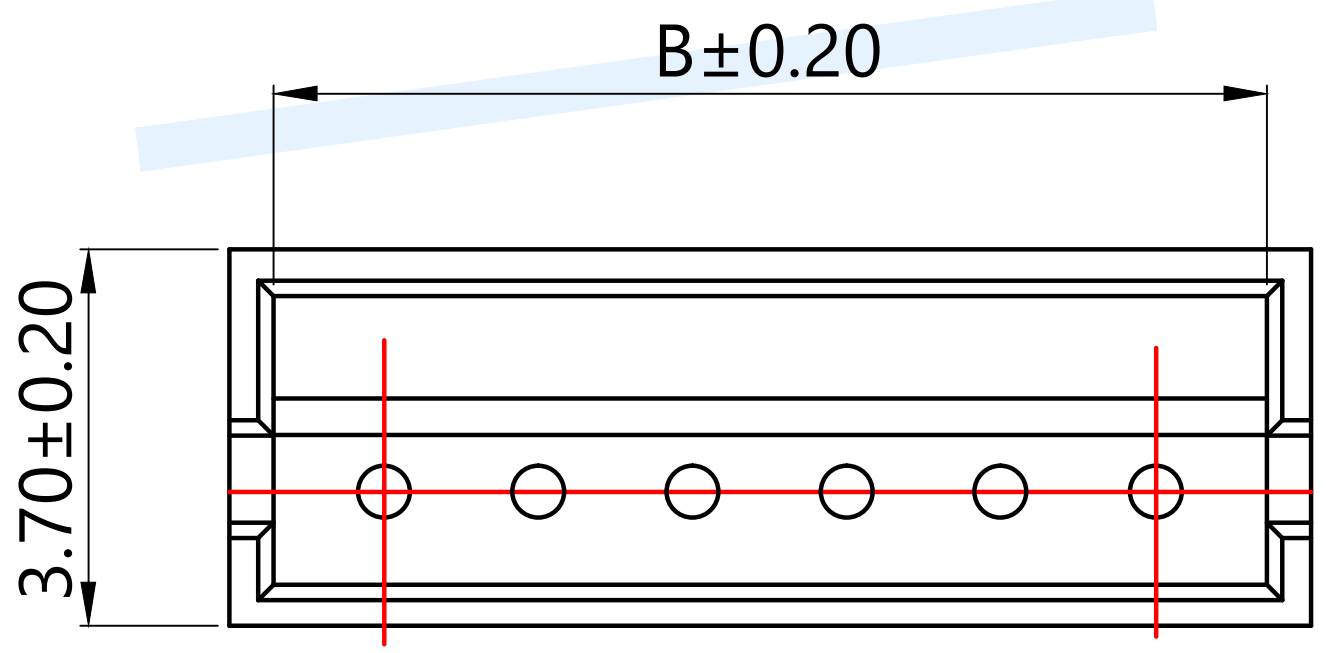

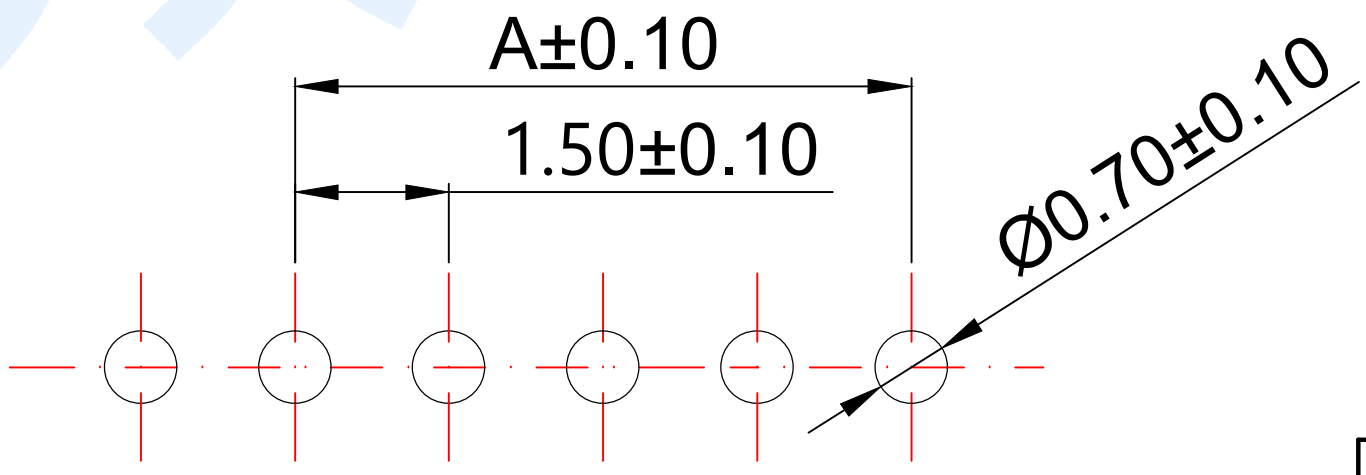

适用线路板(PCB LAYOUT)

Specifications/技术规格:

1.Poles/线数：2～20P
2.Wire range/适用线规：AGW 32#～26#
3.Applicable PC board thickness/适用PC板厚度：0.6～1.2mm
4.Current rating/额定电流：1.0A
5.Voltage rating/额定电压：100V AC/DC
6.Insulation Resistance/绝缘电阻：500MΩ Min
7.Dielectric Withstanding/ 耐电压：500V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	PA66	Off White

ZHONGDI® 众迪 Zhongdi Electronic Technology Co., Ltd

Tolerance not specified	
angle	±2°
10~30	±0.30
5~10	±0.20
~ 5	±0.10

modify | Review | Approved

design		date	
Review		date	
Approved		date	

name: WAFER CONNECTOR
model: WAFER–ZH1.5–□□PZZ–W6
Drawing number:
Proportion 1:1 | unit mm | gape number | A4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-GH1.25-14PWT-W1-P WAFER-SH1.0-8PWT-W1-P WAFER-VH3.96-5PWT-W1-P
WAFER-ZH1.5-2PLT-W1-P WAFER-ZH1.5-2PWT-W1-P WAFER-HY2.0-6PLT-W1-P
WAFER-HY2.0-7PWT-W1-P WAFER-ZH1.5-12PWT-W1-P WAFER-ZH1.5-4PLT-W1-P
WAFER-SH1.0-11PLT-W1-P WAFER-SHB1.0-13PLT-W1-P WAFER-VH3.96-3PWT-W1-P
WAFER-GH1.25-12PLT-W1-P WAFER-MX1.25-5PLT-W1-P WAFER-MX1.25-5PZZ-C22-9T
WAFER-SH1.0-6PWT-W1-P WAFER-SUR0.8-12PWT-W1-P WAFER-TJC8-2.54-12PZZ
WAFER-XH2.54-12PWT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-MX1.25-2PWZ-C22-9T
WAFER-MX1.25-4PWZ-C22-9T WAFER-PH2.0-2PWT-W1-P WAFER-TJC8-2.54-2PWZ
WAFER-XHB2.54-7PWT-W1-P WAFER-HY2.0-6PWT-W1-P WAFER-SUR0.8-14PWT-W1-P
WAFER-HY2.0-10PWT-W1-P WAFER-SHB1.0-8PWT-W1-P WAFER-SUR0.8-4PLT-W1-P