

由 Autodesk 教育版产品制作

RoHS


MAPX	MODIFICATION	DATE

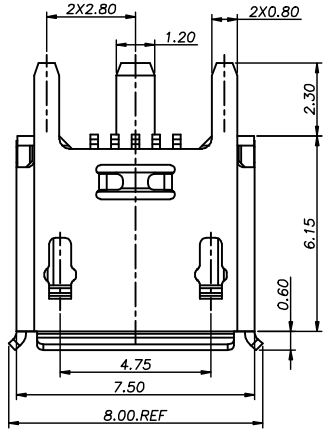


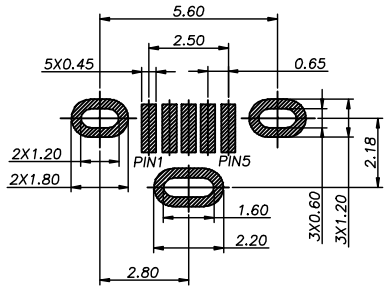



RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05


NOTE:
1.MATERIAL SPECIFICATION:
1−1.HOUSING:LCP; UL94 V−0 BLACK.
1−2.CAP:LCP; UL94 V−0 BLACK.
1−3.CONTACTS: BRASS .
1−4.FRONT SHELL: STAINLESS STEEL
2.PLATING SPECIFICATION:
2−1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au1u"MIN PLATED ON THE FUNCTIONAL AREA OF CONTACT.
2−2.FRONT SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.
3.MECHANICAL PERFORMANCE,
3−1.INSERTION FORCE: 3.5Kgf MAX
3−2.REMOVAL FORCE: 0.8kgf MIN
3−3.DURABILITY: 10000 CYCLES.
4.ELECTRICAL PERFORMANCE,
4−1.CURRENT RATING:
VBUS & GND PINS: 1.8A MAX.
OTHER PINS: 0.5A MAX.
4−2.INSULATION RESISTANCE: 100MΩ MIN
4−3.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

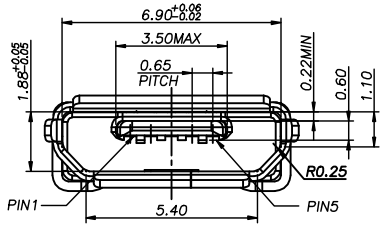

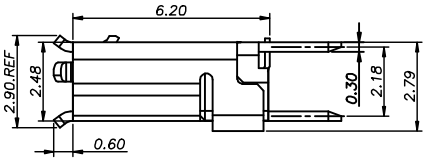







CAP DIMENSION SKETCH MAP

PIN	NAME
5	GND
4	ID
3	D+
2	D−
1	VBUS

PIN ASSIGNMENT

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.35	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.10	.XX	±1.°
.XXX	±0.05	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	ZYB	制图料号 PRODUCT PART NO.	920−154A2021Y10106
比例 SCALE	1:1	审核 CHKD	郑治富	产品名称 PRODUCT NO.	MICRO 5P/F[illegible] 10.05/6.75[illegible] LCP[illegible] SMT+[illegible]
日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW	版本 VER: A0

由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

907-312A1101Y10210 912-112A2021S10100 920-154A2021Y10110 920-A62A2021S10104
920-C62A2021S10103 907-111A1022D10200 917-B88C201AH70201 919-162A1012D10400
905-761A2032S10200 916-151A1022Y10200 918-468K2029Y50000 920-A64A2091S101A3
920-F52A2021S10105 910-151A2021D10100 912-312A1012D10100 920-C52A2021S10105
904-232B2032S10100 906-552A1012D10200 908-351A1011D10100 906-752B1114D10200
918-415K3028S40000 918-418K2022Y40011 904-331B2032S10200 911-221A2021S10100
912-112A1011D10100 917-P81A202ES60201 918-318K2023C40005 904-232A2031S10100
920-A62A2021S10108 906-262A1021D10200