
K62 Series Make & Break Load Switching — 25 kV Relays

K62A and K62B Product Facts


- **25 kV relay with flying leads for ease of installation**
- **Vacuum dielectric and tungsten contacts for power switching low current loads**
- **Meets requirements of MIL-R-83725**




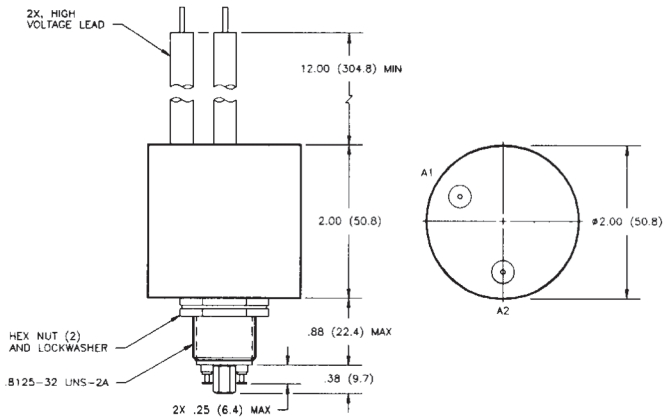

K62C Product Facts

- **SPDT version of K62**
- **Vacuum dielectric for power switching low current loads**
- **Carries 18 Amps continuous current**
- **Meets requirements of MIL-R-83725**

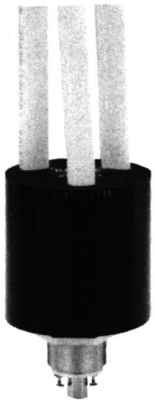

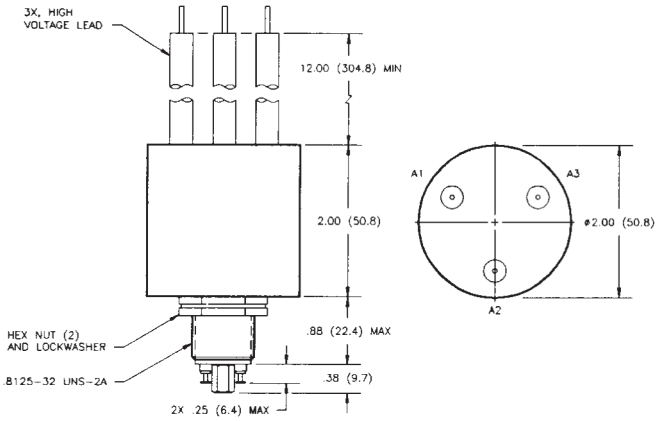

Product Specifications for K62A, K62B and K62C

Contact Arrangement —
K62A — SPST-NO
K62B — STST-NC
K62C — SPDT

Contact Form —
K62A — A
K62B — B
K62C — C

Test Voltage, DC or 60 Hz (Peak) — 30 kV

Rated Operating Voltage (Peak) — DC or 60 Hz — 25 kV

Continuous Carry Current, Max. —
DC or 60 Hz — 18 A
Coil Hi-Pot (Vrms, 60 Hz) — 500 A

Contact Resistance, Max. — 0.50 ohm

Operate Time, Max. — 15 ms

Release Time, Max. — 15 ms

For factory-direct application assistance, dial 800-253-4560, ext. 2055, or 805-220-2055.

Shock, 11ms, 1/2 Sine (Peak) — 20 g

Vibration —
Peak — 10 g (55 to 500 Hz)

Operating Ambient Temperature Range — -55°C to +85°C

Mechanical Life — 1 million cycles

Weight, Nominal — 340 g (12 oz.)

Coil Data

Volts, Nominal DC	12 V	26.5 V	115 V
Pickup, Max.	9 Vdc	18 Vdc	90 Vdc
Dropout	.5-5 Vdc	1-10 Vdc	5-55 Vdc
Coil Resistance (±10%)	30 Ω	125 Ω	2400 Ω

Ratings listed are for 25°C, sea level conditions

Ordering Information

Sample Part Number ▶ **K62 A 7 4 1**

Series:

Contact Form:
A = SPST-NO B = SPST-NC C = SPDT

Coil Voltage:
7 = 12 Vdc, Turret Terminal
8 = 26.5 Vdc, Turret Terminal
9 = 115 Vdc, Turret Terminal

High Voltage Connections:
4 = Flying Leads, 12"
7 = Flying Leads, 72"
8 = Flying Leads, 36"

Mounting:
1 = Threaded

Catalog 5-1773450-5
Revised 3-13

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in millimeters unless otherwise specified.

USA: +1 800 522 6752
Asia Pacific: +86 0 400 820 6015
UK: +44 800 267 666

For additional support numbers please visit www.te.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

141991-2 1903112-2 2834055-1 1-794222-0 2377783-2 2-292161-3 2310537-1 3-1393225-0 917696-1 ROX05SJ18R TE50BR39J 3631B101LL 650075-000 MPT100C18RF RH73H2A40MKTN SBCHE64R7K 175977-2 2005330-1 2380312-2 3430B2F51RTDF CPF0402B37K4E1 SBCHE154R7K 1-962915-1 1743455-2 936348-1 CRGCQ2010J3K3 U5254-000005-030PA 1393431-1 1969656-1 SMW73R0JT