

FEMALE BULKHEAD RECEPTACLE FRONT MOUNT.
COMBINATION SEAL WITH SOLDER POT CONTACT


R141.603.000
Series : **BNC**

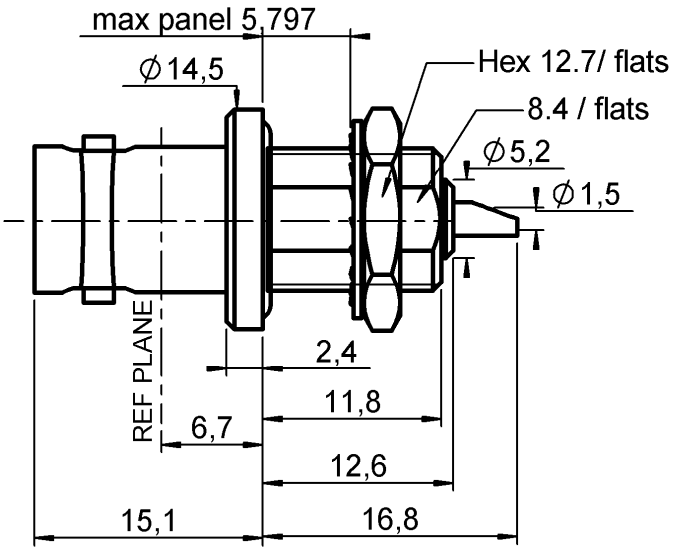


PANEL CUT OUT



	mm	
	Maxi	mini
A	9.75	9.65
B	8.65	8.55



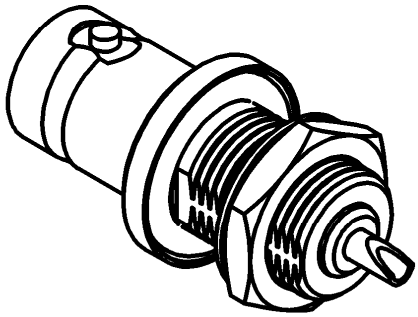

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	**BRASS**	**NICKEL 2**
CENTER CONTACT	**BERYLLIUM COPPER**	**GOLD 0.5 OVER NICKEL 2**
OUTER CONTACT	-	-
INSULATOR	**Q200-5**	
GASKET	**SILICONE RUBBER**	
OTHERS PARTS	**BRASS**	**NICKEL**
-	-	-
-	-	-

Issue : 1104 G

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

FEMALE BULKHEAD RECEPTACLE FRONT MOUNT.
COMBINATION SEAL WITH SOLDER POT CONTACT

R141.603.000
Series : **BNC**

PACKAGING

Standard	Unit	Other
100	**'W' option**	**Contact us**

SPECIFICATION

00368.396-444.957-451.651
48.027-5.560.504-DKS 795170

ELECTRICAL CHARACTERISTICS

Impedance			**50**	Ω
Frequency			**0-4**	GHz
VSWR	**1.30***	+	**0,0000**	x F(GHz) Maxi
Insertion loss			**0.05**	√F(GHz) dB Maxi
RF leakage		- (	**57**	- F(GHz)) dB Maxi
Voltage rating			**500**	Veff Maxi
Dielectric withstanding voltage			**1500**	Veff mini
Insulation resistance			**5000**	MΩ mini

ENVIRONMENTAL

Operating temperature	**-65/+165**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**0.35**	Mpa

OTHERS CHARACTERISTICS

Assembly instruction **NA**

Others :
* Coaxial Transmission Line Only

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	**18**	N mini
Axial force – Opposite end	**18**	N mini
Torque	**2.8**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**250**	N.cm
Mating life	**500**	Cycles mini
Weight	**10,8030**	g

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Radiall:

EPXBE13P1SB R191303000 R223424000 R929101/C290001-10CM EPXBE28SA R141557000W R191405000 R114554000W R143012000 R161325000W R180160007 R191329000 R142076161 R112553000 R124510000W R125403001 R141407000W R180300007W R284C0351050 R112186000 R125326000 R284C0351026 R142703000 R125078000W R284C0351003 R284C0351015 R316553000 R114165000W R284C0351054 R929104/C290004-20CM