Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1004 + 1004
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1004 0,35 + 1004 0,35		1,20 + 1,20	55	1,25	0,05	2,05	0,10	2,00	0,10	2,60	0,10

Cable type code legend:

1004:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC
Insul. Wall Designator: ULTRA THIN



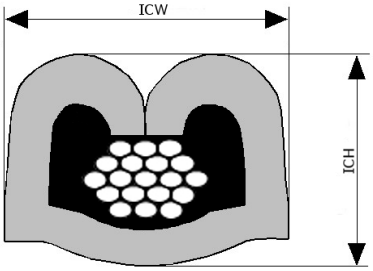

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1005 0,80		2,03	90	1,25	0,05	2,05	0,10	2,30	0,10	2,70	0,10
1005 1,00		2,23	120	1,40	0,05	2,10	0,10	2,40	0,10	2,70	0,10

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN



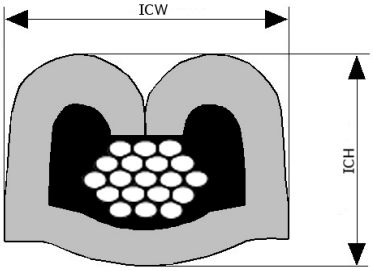

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1005
Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
Insulation Range Φ[mm]: 1,85 - 2,20
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1005 0,80		2,03	90	1,25	0,05	2,05	0,10	2,30	0,10	2,70	0,10

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN



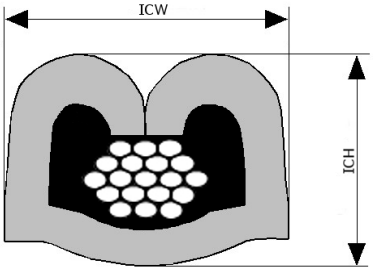

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1005 + 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1005 0,35 + 1005 0,35		1,60 + 1,60	55	1,25	0,05	2,05	0,10	2,90	0,10	2,70	0,10

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN



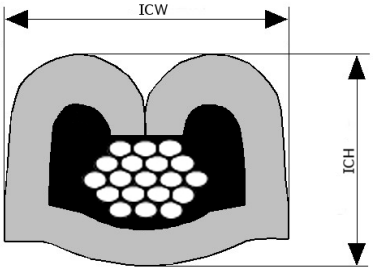

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1005 + 1005
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1005 0,50 + 1005 0,50		1,74 + 1,74	75	1,40	0,05	2,05	0,10	3,00	0,10	2,80	0,10

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN



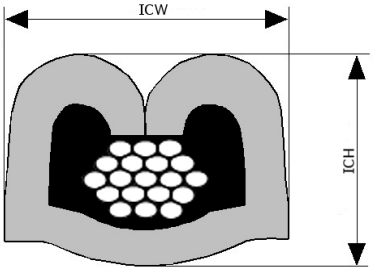

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1005 + 1005
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1005 0,50 + 1005 0,50		1,74 + 1,74	75	1,40	0,05	2,05	0,10	3,00	0,10	2,80	0,10

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN



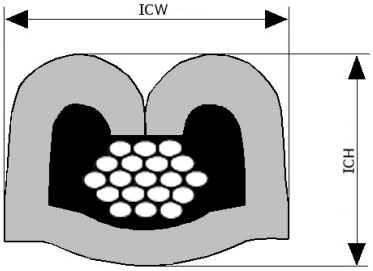

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1007 0,80		2,33	90	1,25	0,05	2,05	0,10	2,70	0,10	2,80	0,10
1007 1,00		2,58	120	1,40	0,05	2,10	0,10	2,80	0,10	2,90	0,10

Cable type code legend:

1007:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR



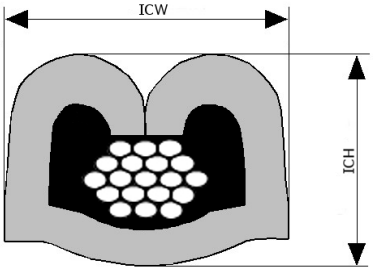

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1007
Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1007 0,80		2,33	90	1,25	0,05	2,05	0,10	2,70	0,10	2,80	0,10

Cable type code legend:

1007:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR



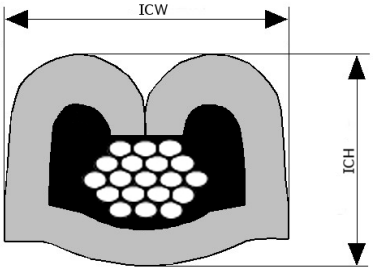

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1019
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 1,90
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1019 0,80		1,80	90	1,25	0,05	2,05	0,10	2,30	0,10	2,70	0,10

Cable type code legend:

1019:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN SPECIAL



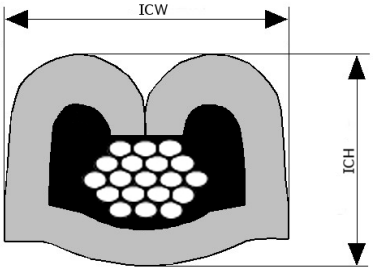

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1019
Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
Insulation Range Φ[mm]: 1,70 - 1,90
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1019 0,80		1,80	90	1,25	0,05	2,05	0,10	2,30	0,10	2,70	0,10

Cable type code legend:

1019:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN SPECIAL



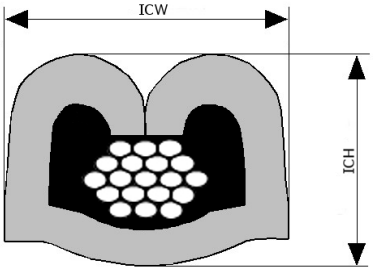

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1021
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,06 - 1,25
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1021 0,80		1,16	90	1,25	0,05	2,05	0,10	2,20	0,10	2,70	0,10

Cable type code legend:

1021:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE



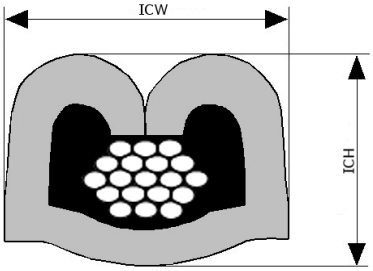

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1025
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,18
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1025 0,80		2,02	90	1,25	0,05	2,05	0,10	2,30	0,10	2,70	0,10

Cable type code legend:

1025:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
Insul. Wall Designator: THIN



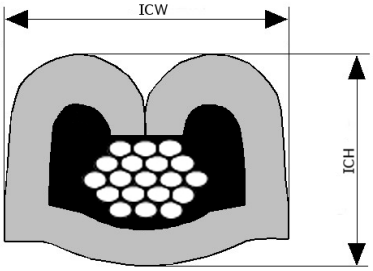

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1046 + 1046
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1046 0,35 + 1046 0,35		1,20 + 1,20	70	1,25	0,05	2,05	0,10	2,00	0,10	2,60	0,10

Cable type code legend:

1046:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: ULTRA THIN



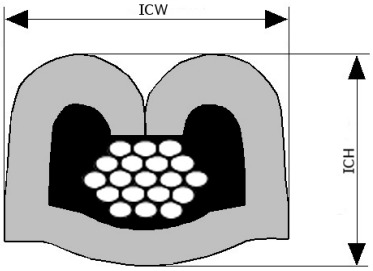

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 1089
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,74 - 1,90
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
1089 0,80		1,82	90	1,25	0,05	2,05	0,10	2,30	0,10	2,70	0,10

Cable type code legend:

1089:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN SPECIAL



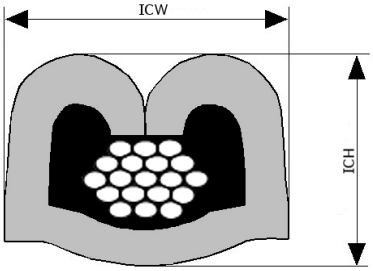

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50 | 0,75 | 1,00

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,30 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
2010 0,50		1,50	75	1,15	0,05	2,05	0,10	2,30	0,10	2,60	0,10
2010 0,75		1,75	160	1,40	0,05	2,10	0,10	2,60	0,10	2,70	0,10
2010 1,00		1,95	160	1,40	0,05	2,10	0,10	2,60	0,10	2,70	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC
Insul. Wall Designator: THIN



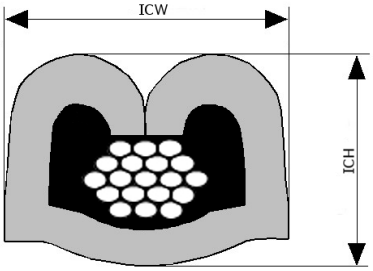

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 1,00

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 2010
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 1,80 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
2010 1,00		1,95	115	1,40	0,05	2,10	0,10	2,70	0,10	2,70	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC
Insul. Wall Designator: THIN



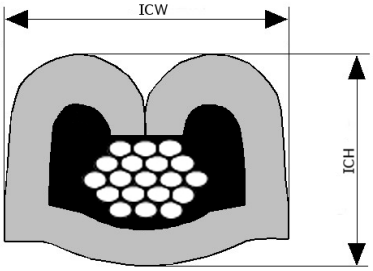

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 2010 + 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
2010 0,35 + 2010 0,35	TOP	1,34 + 1,34	50	1,20	0,05	2,05	0,10	2,85	0,10	2,75	0,10
2010 0,50 + 2010 0,50	TOP	1,50 + 1,50	80	1,40	0,05	2,10	0,10	2,85	0,10	2,75	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC
Insul. Wall Designator: THIN



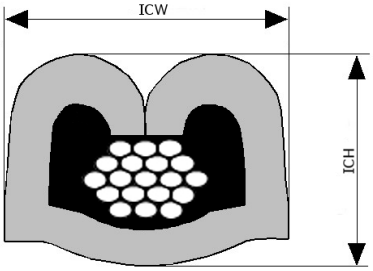

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,75 | 1,00

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 2011
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,05 - 2,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
2011 0,75		2,28	70	1,30	0,05	2,10	0,10	2,55	0,10	2,60	0,10
2011 1,00		2,54	80	1,35	0,05	2,10	0,10	2,80	0,10	2,65	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: P/EST, PE, PVC, XLPE
Insul. Wall Designator: REGULAR



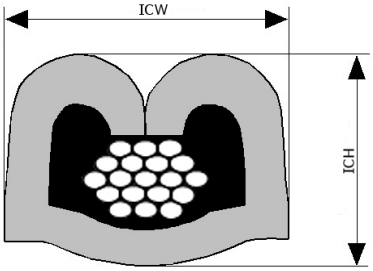

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,75

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 2039
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,33 - 1,52
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
2039 0,75		1,43	90	1,30	0,05	2,05	0,10	2,03	0,10	2,70	0,10

Cable type code legend:

2039:
Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PPE, PVC
Insul. Wall Designator: ULTRA THIN



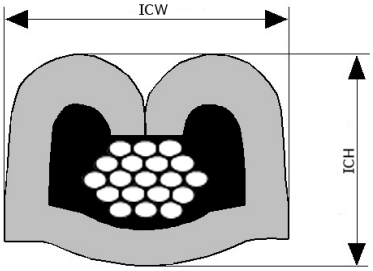

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,75 | 1,00

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 2044
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,65 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
2044 0,75		1,78	120	1,25	0,05	2,10	0,10	2,50	0,10	2,70	0,10
2044 1,00		1,96	160	1,40	0,05	2,10	0,10	2,60	0,10	2,70	0,10

Cable type code legend:

2044: A3Z, F3Z, FL RENAULT A3Z
Industry Designator: NRA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPA/PVDF, XLPE, X-POLY ZH
Insul. Wall Designator: THIN



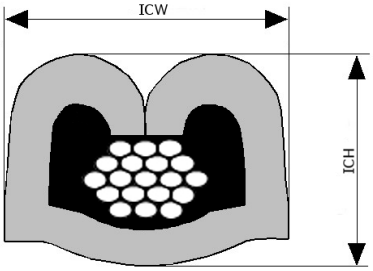

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 2044 + 2044
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
2044 0,50 + 2044 0,50	TOP	1,50 + 1,50	80	1,40	0,05	2,10	0,10	3,00	0,10	2,80	0,10

Cable type code legend:

2044: A3Z, F3Z, FL RENAULT A3Z
Industry Designator: NRA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPA/PVDF, XLPE, X-POLY ZH
Insul. Wall Designator: THIN



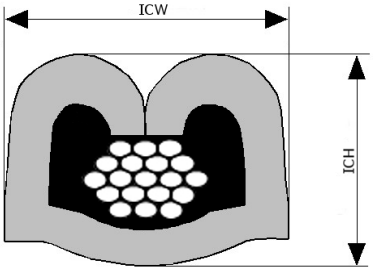

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,75 | 1,00

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 2055
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
2055 0,75		1,70	120	1,25	0,05	2,10	0,10	2,40	0,10	2,70	0,10
2055 1,00		1,93	160	1,40	0,05	2,10	0,10	2,50	0,10	2,70	0,10

Cable type code legend:

2055: AGP0119, RENAULT F3Z
Industry Designator: NRA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN
Insul. Wall Designator: THIN



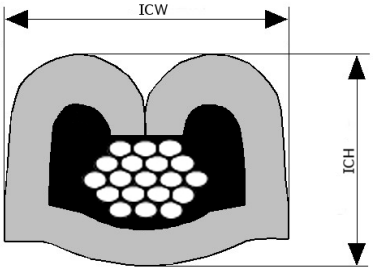

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 2055 + 2055
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
2055 0,50 + 2055 0,50	TOP	1,50 + 1,50	80	1,40	0,05	2,10	0,10	3,00	0,10	2,80	0,10

Cable type code legend:

2055: AGP0119, RENAULT F3Z
Industry Designator: NRA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN
Insul. Wall Designator: THIN



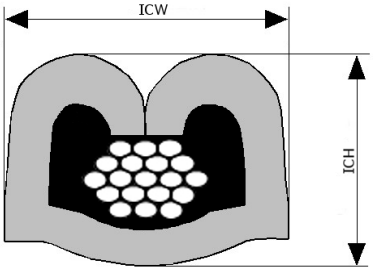

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,85

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 3003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 1,90
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
3003 0,85		1,80	95	1,25	0,05	2,10	0,10	2,50	0,10	2,70	0,10

Cable type code legend:

3003: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, X-PVC
Insul. Wall Designator: THIN



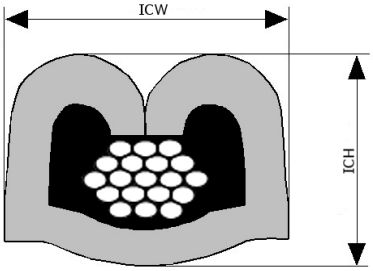

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,85 | 1,25

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 3004
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 2,20
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
3004 0,85		1,80	90	1,30	0,05	2,05	0,10	2,30	0,10	2,60	0,10
3004 1,25		2,10	135	1,40	0,05	2,10	0,10	2,60	0,10	2,70	0,10

Cable type code legend:

3004: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE, X-PVC
Insul. Wall Designator: THIN



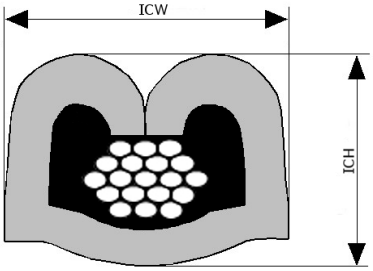

Downloaded from Arrow.com.

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304702
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 1,00

This document is non-contractual and for information only.


For more information, please consult your local sales office


Cable Type codes: 8000
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,90 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	**CCH [mm]**	**Tol CCH [mm]**	**CCW [mm]**	**Tol CCW [mm]**	**ICH [mm]**	**Tol ICH [mm]**	**ICW [mm]**	**Tol ICW [mm]**
8000 1,00		2,00	115	1,35	0,05	2,10	0,10	2,70	0,10	2,70	0,10

Cable type code legend:

8000:
Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: SYNTHRESIN
Insul. Wall Designator: THIN



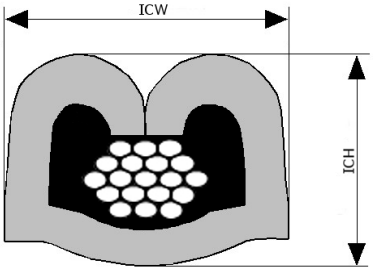

Downloaded from Arrow.com.