



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2016
© COPYRIGHT 2016 BY TE CONNECTIVITY ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	NC	NEW RELEASE PER E.O. P18478	29JAN2004	-	RDR
	B	REVISED PER PCN-24-222744	18SEP2024	GB	CB

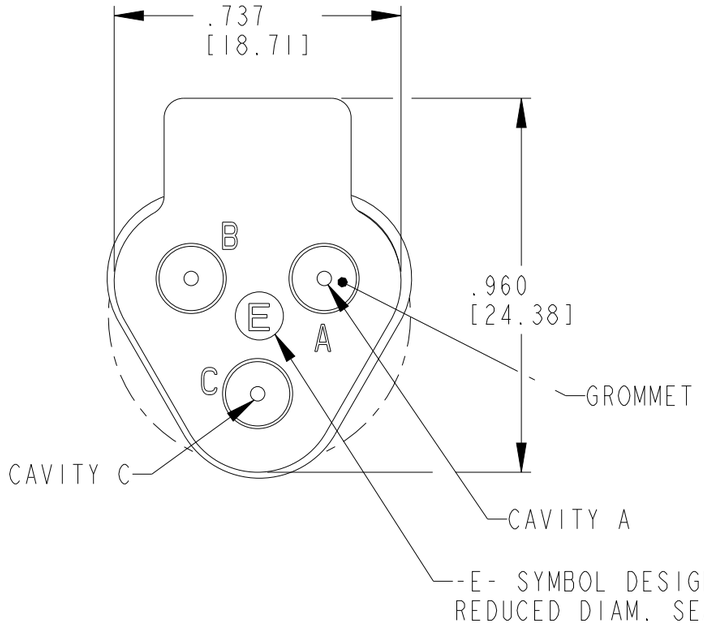

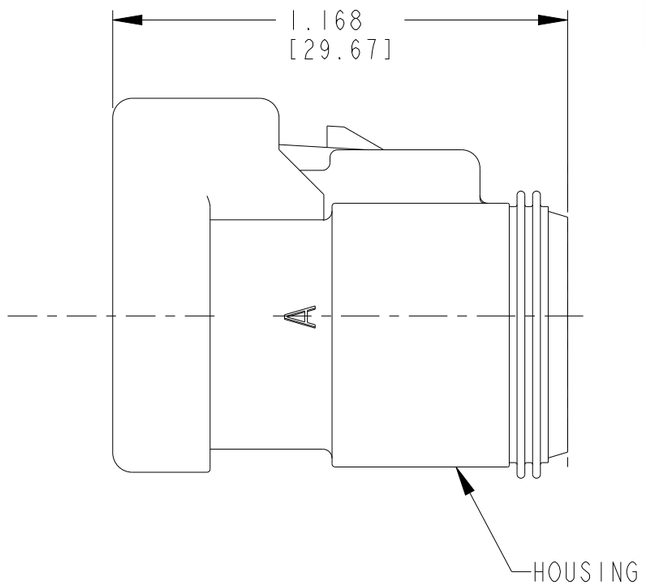

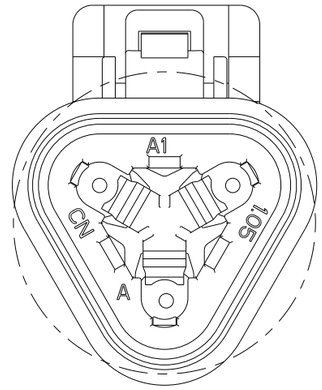

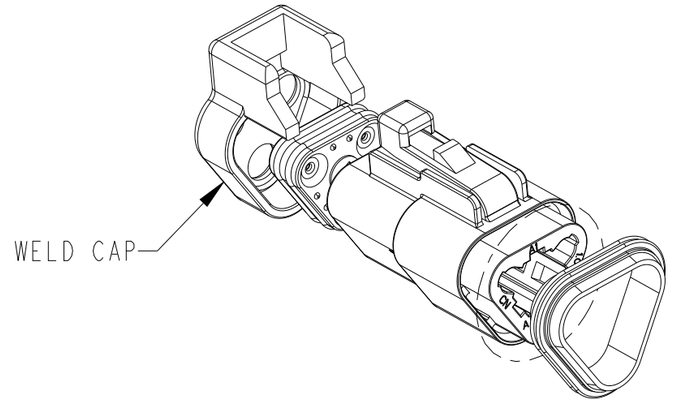

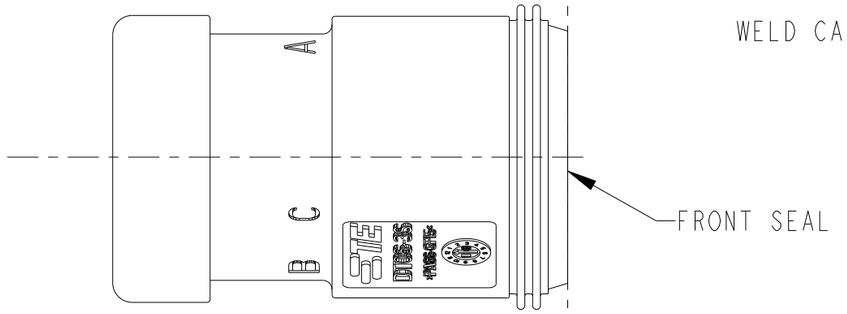

5. MATERIAL: HOUSING: PA66 GF15 (BLACK)
CAP: PA66 GF15 (BLACK)
FRONT SEAL: VMQ (RED-ORANGE)
GROMMET: VMQ (BURNT RED)

4. THIS CONNECTOR CAN PASS THRU A ONE INCH [25.4 mm] HOLE.

3. THIS PLUG MATES WITH DT04-3P-XXXX RECEPTACLE
(XXXX = ALL MODIFICATIONS) CONSULT FACTORY FOR MODIFICATION

2. WEDGE LOCK W3S-P012 SOLD SEPERATLY.

1 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATON CHARACTERSTICS SEE ENVELOPE DRAWING 0425-015-0000 AND 0425-017-0000.

NOTES:

TE INTERNAL PN	DEUTSCH PN
DT06-3S-CE14	DT06-3S-CE14

CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	1 WIRE RANGE [mm^2] REF ONLY
16	.053 [1.35]	.120 [3.05]	14-20 AWG [2.5-0.5]

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: in [mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 [0.64]
4 PLC ±
ANGLES ±1°

MATERIAL 3

FINISH

DWN T. YOHANNES 26JAN2004
CHK R. MILLIGAN 29JAN2004
APVD S. BEARD 29JAN2004
PRODUCT SPEC 108-151009
APPLICATION SPEC 114-151009
WEIGHT 7.00g

TE Connectivity

NAME 3 WAY PLUG WITH REDUCED DIAM. SEAL -CE14 MOD. DT SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-DT06-3S-CE14	

CUSTOMER DRAWING | SCALE 2.5:1 | SHEET 1 OF 1 | REV B