


REV.	DATE	ECR NO.	DESCRIPTION
NC	10/29/96	XXXXXX	INITIAL RELEASE
A	05/29/07	XXXXXX	UPDATE DRAWING FORMAT
B	12/06/11	2264	ADD NOTES AND ADD PCB MOUNTING HOLE

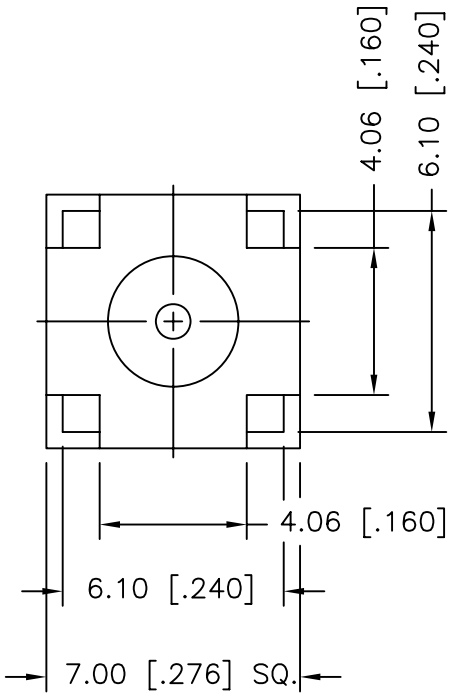

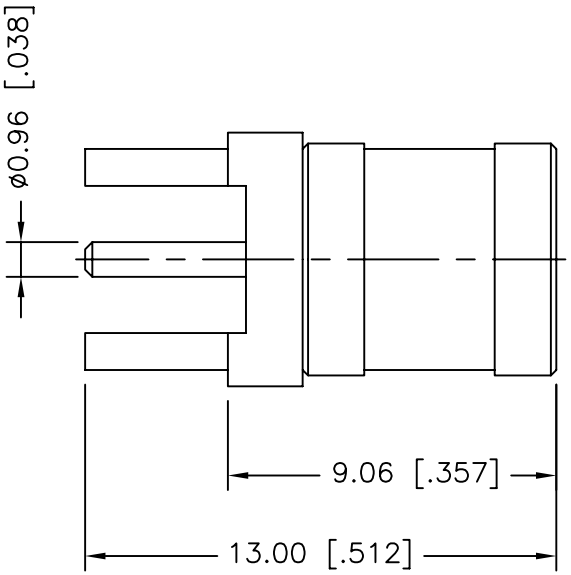

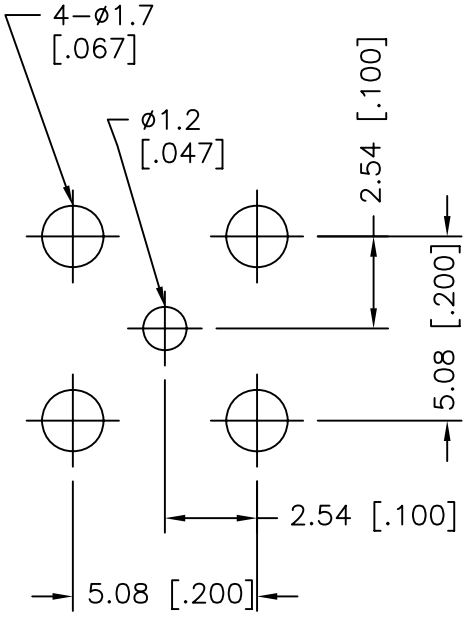

PCB MOUNTING HOLE

1. FREQUENCY RANGE: DC–4 GHz
2. VSWR: 1.3 MAX.
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.

	DESCRIPTION	MATERIAL	FINISH	QTY
5	RETAINER RING	BERYLLIUM COPPER	NATURAL	1
4	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
3	INSULATOR	PTFE	NATURAL	1
2	BODY	BRASS	GOLD	1
1	SHELL	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	12/06/11
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/CONNEX/142134.DWG

Amphenol Connex

PART DESCRIPTION

STRAIGHT SMB PLUG FOR P.C. BOARD

PART NO. 142134

DWG. NO.	REV.	SIZE	SCALE
142134.DWG	B	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-G0805CLF 65781-158 86093968813H45V1LF 91614-403ALF 54202-S08-07LF 68000-236HLF DAPO15S365TLF DCMF37P 68001-200HLF 70218-1116LF CD15S13E4RV09LF LD15P33E4GV00LF 67996-204HLF 70234-112LF 86093488314745V1LF 86093967896755LF 86130202123355E1LF D15P13A6RV12LF LD25S33E4GV00LF RJE061661210 69192-408HLF 70430-164LF DEM09P032N 68001-108HLF 76384-316LF 863013A RJSBE5080C2 68002116HLF 86093968191755E3LF 95157-140LF