Twist-Lock® Devices

20A, 3 Phase Y 277/480V AC, 4 Pole, 5 Wire Grounding

Insulgrip® Plug



20A 3ØY
277/480V AC
NEMA L22-20P
UL/CSA
5 HP



Features


- Superior cord grip design protects terminations from excess strain.
- Clear, funnel shaped wire entry for ease of termination.
- Integral dust shield protects wiring chamber from dust or contaminants.

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black and white nylon.	.350"-1.150" (9-29)	783585038599	HBL2521

Listings

Listed to UL 498
Fed.Spec. W-C-596
Certified to CSA C22.2 No.42

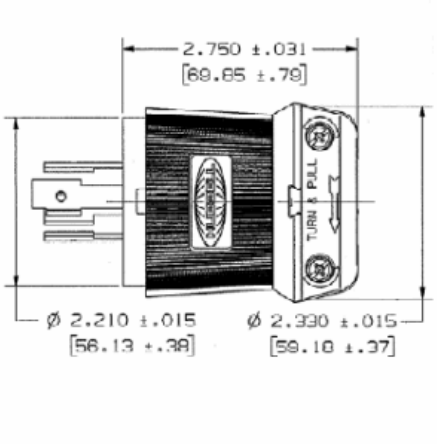

Specifications

Housing / Cord Clamp	Nylon
Terminal Retainer	Clear polycarbonate
Blades	Brass
Terminal Screws	#10-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel - nickel plated

Performance

Electrical

Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	2,000V minimum

Mechanical

Terminal Accommodation	#16 AWG - #8 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

Environmental

Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)

Accessories

Connector	HBL2523
Single Receptacle	HBL2520
Flanged Receptacle	HBL2526
Weatherproof Boot	HBL6035

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484
Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

Wiring Device-Kellems

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HUBBELL:

073031211 HBL2423 HBL2836 HBL7594 SHC1022 HBL9450A NP1LA HBL360P6W HBL5669C HBL7484 SHC1034 SHC1059 HBL2410SW HBL3100RS1WR HBL5100PS1W HBL5366C SEC75GA B2100 CS8464C HBL2610AR HBL3331C HBL8013V HBL2831 HBL4720C CS8164C HBL20418 HBL2321 HBL2711 HBL4586 SHC1015