
REV	
A	DRC16-70S*-P013

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P15136	11-15-96	RDR
A	REVISED PER E.O. P17733	4-16-02	RDR

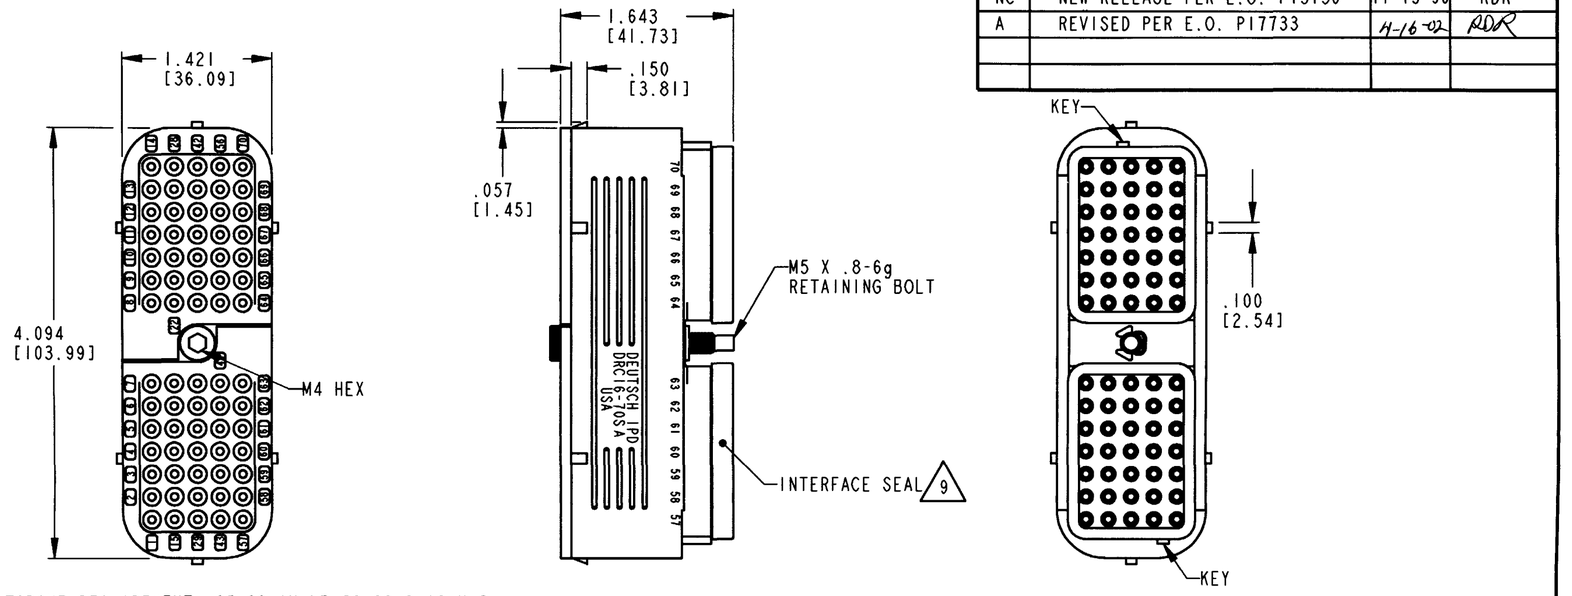

8. MATING TORQUE REQUIREMENT: 25-28 IN-LB [2.82-3.13 Nm].

7. SEE SHEET 2 FOR OTHER KEY ARRANGEMENTS.

6. MATERIAL- PLUG: PLASTIC; SEAL/GROMMET: RUBBER; RETAINING BOLT: STEEL.

5. THIS PLUG MATES WITH DRC12-70P*-****; DRC13-70P*-**** AND DRC14-70P*-**** RECEPTACLE. (*=A,B,C,D KEYS; ****=ALL MODIFICATIONS). CONSULT FACTORY FOR MODS.

4. FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.

3. PLUG SUPPLIED WITH DUST CAP. (NOT SHOWN).

2. DIMENSION TOLERANCE: ±.025 [.64].

1. DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE [mm^2] REF ONLY 4
.100 [2.54]	.134 [3.40]	14-20 AWG [2.0-0.50]

9. PART MODIFICATION: INTERFACE SEALS ARE BONDED TO PLUG HOUSING.

	SIGNATURE & DATE
DR	D. MEYER 04/15/02
CHK	4-16-02
PE	4/15/02
APPD	R. Rood 4-16-02
SCALE	NONE WT

PLUG
70 SIZE 16
KEYS: A,B,C,D
COLOR: BLACK
DRC SERIES

ENVELOPE

CP | MATL. CODE


The Deutsch Company
DEUTSCH I.P.D.
3850 INDUSTRIAL AVE.
HEMET, CALIF. 92545


B | DRC16-70S*-P013

DWG SIZE | CODE 11139 | SHEET 1 OF 2

REV	
A	DRC16-70S*-P013

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
	SEE SHEET 1	4-16-02	RDR

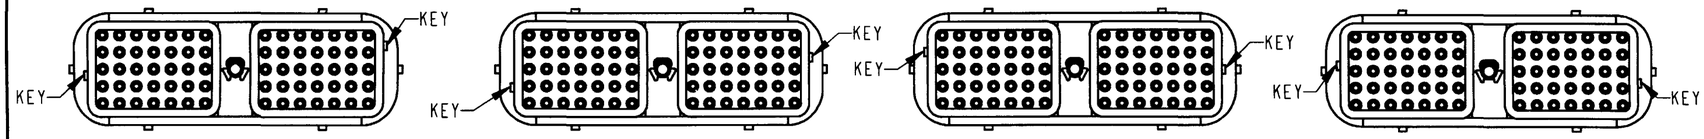

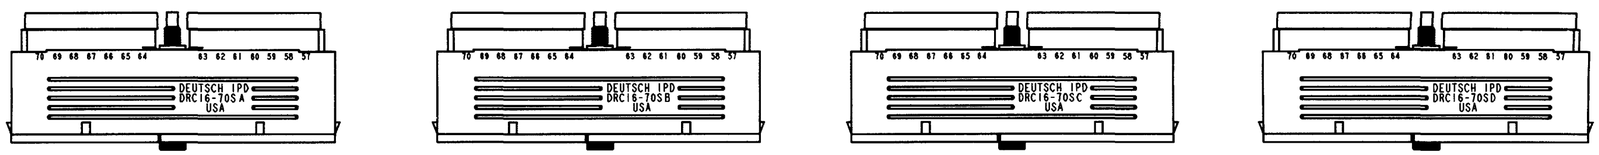

DRC16-70SA-P013
KEY: -A-

DRC16-70SB-P013
KEY: -B-

DRC16-70SC-P013
KEY: -C-

DRC16-70SD-P013
KEY: -D-

NOTES:

	SIGNATURE & DATE
DR	D. MEYER 04/15/02
CHK	
PE	4/15/02
APPD	4-16-02
SCALE	NONE WT

PLUG
70 SIZE 16
KEYS: A,B,C,D
COLOR: BLACK
DRC SERIES

ENVELOPE

CP	MATL. CODE

The Deutsch Company
DEUTSCH I.P.D.
3850 INDUSTRIAL AVE.
HEMET, CALIF. 92545

DWG SIZE	DRC16-70S*-P013
B	CODE 11139 / SHEET 2 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:
DRC16-70SB-P013