




RoHS

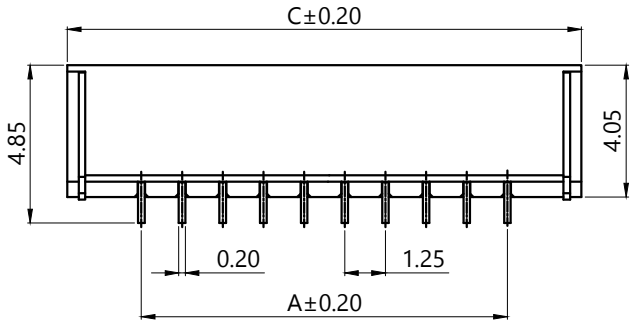





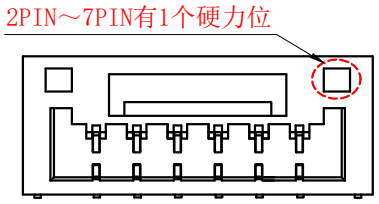

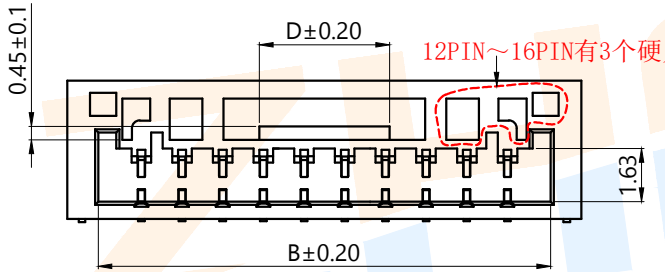

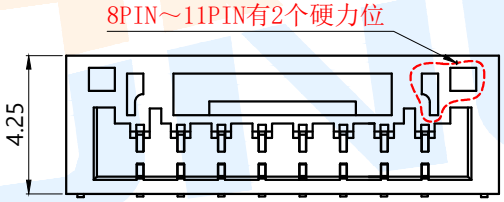

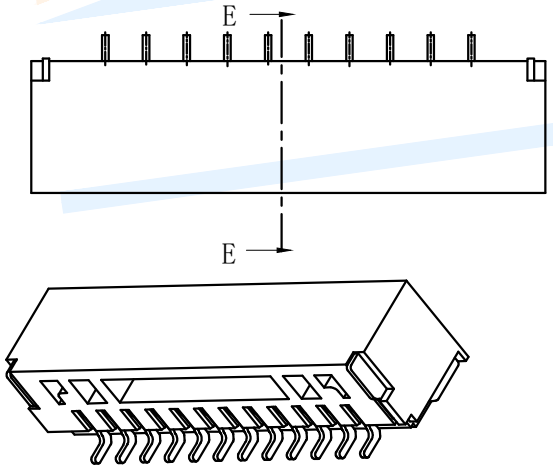

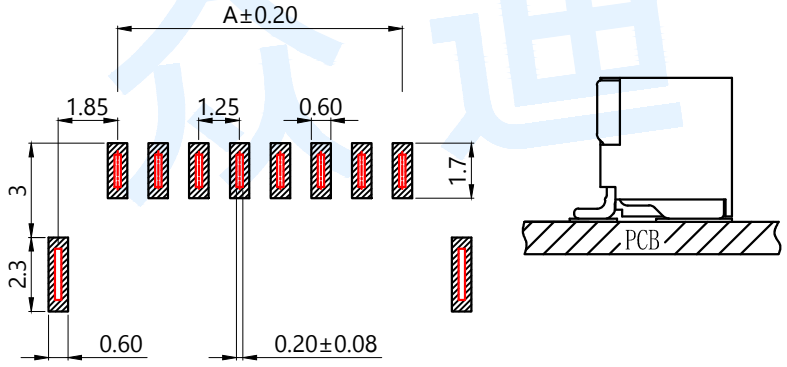

适用线路板(PCB LAYOUT)

Model No.	Pin	A	B	C	C
WAFER-GH1.25-2PWT-W1	2	1.25	3.85	5.80	1.00
WAFER-GH1.25-3PWT-W1	3	2.50	5.10	7.05	1.75
WAFER-GH1.25-4PWT-W1	4	3.75	6.35	8.30	2.00
WAFER-GH1.25-5PWT-W1	5	5.00	7.60	9.55	3.26
WAFER-GH1.25-6PWT-W1	6	6.25	8.85	10.80	4.52
WAFER-GH1.25-7PWT-W1	7	7.50	10.10	12.05	4.50
WAFER-GH1.25-8PWT-W1	8	8.75	11.35	13.30	4.50
WAFER-GH1.25-9PWT-W1	9	10.00	12.60	14.55	4.50
WAFER-GH1.25-10PWT-W1	10	11.25	13.85	15.80	6.50
WAFER-GH1.25-11PWT-W1	11	12.50	15.10	17.05	6.50
WAFER-GH1.25-12PWT-W1	12	13.75	16.35	18.30	6.50
WAFER-GH1.25-13PWT-W1	13	15.00	17.60	19.55	6.50
WAFER-GH1.25-14PWT-W1	14	16.25	18.85	20.80	6.50
WAFER-GH1.25-15PWT-W1	15	17.50	20.10	22.05	6.50
WAFER-GH1.25-16PWT-W1	16	18.75	21.35	23.30	6.50
WAFER-GH1.25-□□PWT-W1(-P=盘装,非盘装不启用)					

Specifications/技术规格:

1.Poles/线数：2～16P
2.Wire range/适用线规：AGW 32#～28#
3.Applicable PC board thickness/适用PC板厚度：0.6～1.2mm
4.Current rating/额定电流：1.0A
5.Voltage rating/额定电压：125V DC/AC
6.Insulation Resistance/绝缘电阻：100MΩ Min
7.Dielectric Withstanding/ 耐电压：500V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓒ	Soldering lug		1	Phosphorous copper	Plating Sn
Ⓑ	Terminal			Phosphorous copper	Plating Sn
Ⓐ	Housing		1	LCP	Off White

Zhongdi Electronic Technology Co., Ltd

										angle	±2°		design		date		name	WAFER CONNECTOR
										10~30	±0.30		Review		date			
										5~10	±0.20		Approved		date		model	WAFER-GH1.25-□□PWT-W1
										~ 5	±0.10	Drawing number:						
					modify		Review		Approved	Tolerance not specified		Proportion	1:1	unit	mm	gape number		A4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-SH1.0-8PWT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-HY2.0-7PWT-W1-P
WAFER-MX1.25-5PLT-W1-P WAFER-PH2.0-2PWT-W1-P WAFER-TJC8-2.54-2PWZ
WAFER-XH2.54-12PWT-W1-P WAFER-MX1.25-4PWZ-C22-9T WAFER-SUR0.8-4PLT-W1-P
WAFER-VH3.96-3PWT-W1-P WAFER-ZH1.5-4PLT-W1-P WAFER-SHB1.0-8PWT-W1-P
WAFER-XHB2.54-7PWT-W1-P WAFER-ZH1.5-2PLT-W1-P WAFER-GH1.25-12PLT-W1-P
WAFER-MX1.25-5PZZ-C22-9T WAFER-SH1.0-11PLT-W1-P WAFER-SH1.0-6PWT-W1-P
WAFER-VH3.96-5PWT-W1-P WAFER-HY2.0-10PWT-W1-P WAFER-HY2.0-6PLT-W1-P
WAFER-HY2.0-6PWT-W1-P WAFER-SUR0.8-12PWT-W1-P WAFER-ZH1.5-12PWT-W1-P
WAFER-GH1.25-14PWT-W1-P WAFER-MX1.25-2PWZ-C22-9T WAFER-SHB1.0-13PLT-W1-P
WAFER-SUR0.8-14PWT-W1-P WAFER-TJC8-2.54-12PZZ WAFER-ZH1.5-2PWT-W1-P