

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ECO #7057	03/19/08	A.D.M.



PROPRIETARY INFORMATION
NOT TO BE RELEASED
WITHOUT WRITTEN PERMISSION
FROM AN AUTHORIZED
REPRESENTATIVE OF
APPLIED ENGINEERING PRODUCTS

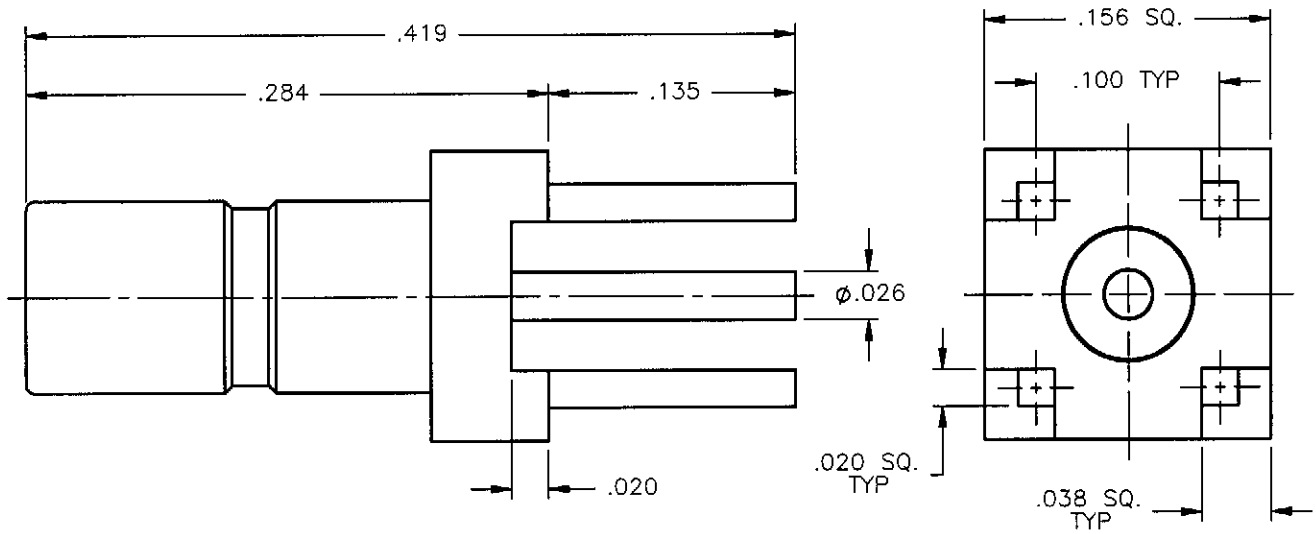

NOTES:

MATERIALS:

1. BODY = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. BODY = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: A.D.M. DATE 03/19/08	AEP a RADIALL company — APPLIED ENGINEERING PRODUCTS, 104 John W. Murphy Dr., New Haven, CT 06513
DECIMAL	ANGLE	CHKD: D.N. DATE 03/19/08	SSMB STRAIGHT JACK P.C.B. MOUNT RECEPTACLE
		APVD: J.M. DATE 03/19/08	
REFERENCE: ORIGINATED: D.N. DATE: 03/19/00		MATERIALS & FINISHES: SEE NOTES	SIZE A · FSCM NO. 19505 · DWG NO. 7209-1511-011 · REV A
			SCALE 10:1 · THIRD ANGLE PROJECTION · SHEET 1 OF 1

7209-1511-011

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:

7209-1511-011